

**Haier**  
More Creation, More Possibilities

**GENERAL MECHANICAL LLC**



**ADDRESS**

420 office, 54b, Egizbayev street, Almaty city, Kazakhstan

**CONTACTS**

Tel: +7 727 317 1898 / +7 700 305 5858

B2C Website: [www.gmclimate.kz](http://www.gmclimate.kz)

The specifications, designs and information in this brochure are subject to the actual products.  
Haier reserves the right to make change without any notice.

Haier

**Haier**  
More Creation, More Possibilities

2025 SUPER CLIMA

Version 1.0

# SUPER CLIMA



## 2025 General Catalogue Chiller & Air-side

**Haier Intelligent Buildings**

# Haier Brand Story

Founded in 1984, Haier Group is a leading global provider of better life and digital transformation solutions. Based on the purpose of "More Creation, More Possibilities", we are committed to co-create infinite possibilities for a better life with users, and to co-create infinite possibilities for industrial development with the ecological partners.

Being an iconic company in the real economy, we've always been user centered, adhered to original technology and built a landscape of three pillars, Smart Living, Comprehensive Health and Industrial Internet. We have built 10 R&D centers, 71 research institutes, 35 industrial parks, 143 manufacturing centers and a sales network of 230,000 nodes around the world. We are the world's only IoT Ecosystem Brand that has been ranked in the Kantar BrandZ Top 100 Most Valuable Global Brands for six consecutive years. Additionally, we have ranked among the Top 10 in the Google & Kantar BrandZ Chinese Global Brand Builders for eight consecutive years, held the No.1 position in Euromonitor's Global Major Appliances Brand for 15 consecutive years, and have been selected as one of The World's 500 Most Influential Brands by the World Brand Lab for twenty consecutive years.

We have five listed companies, and our subsidiary Haier Smart Home is named among the Fortune's Global 500 and World's Most Admired Companies. We have several global premium brands, including Haier, Casarte, Leader, GE Appliances, Fisher & Paykel, AQUA and Candy, and have the world's first smart home Scenario Brand, SAN YI NIAO. We have built the world-leading industrial Internet platform COSMOPlat and the comprehensive health industry ecosystem Incaier.

We believe: More collaboration will happen when more boundaries are broken, and more valuable relationships are established. Only then will the future of the world be filled with infinite wonderful possibilities.

\*Data as of June 2024





## Haier Intelligent Buildings

Qingdao Haier Intelligent Buildings Technology Co., Ltd., established in July 2003, originally known as Haier Central Air Conditioning, is one of the pillar enterprises in Haier Group's smart residential segment. As a second growth curve for Haier Smart Home's development, Haier Intelligent Buildings aims to provide users with smart living solutions in the Internet of Things era. Over the past 30 years, it has evolved from developing and manufacturing central air-conditioning equipment to customizing green, low-carbon intelligent building solutions. Its pursue of greater achievements is driven by continuous innovation and accumulation.


Haier Intelligent Buildings is right on track, aligning with these national Dual Carbon goals, aiming to lead in efficient, sustainable, green, and intelligent buildings.

Our efficient HVAC solutions offer intelligent and energy-efficient air systems globally. With the increasing popularity of green buildings, Haier Intelligent Buildings has expanded its previous focus on central air-conditioning systems to introducing state-of-the-art energy-efficient products like the Magnetic Bearing Centrifugal Chiller and IoT-enabled MRV. Our product portfolio now includes eight major groups, over 30 series, and more than 1,000 models, achieving intelligent upgrades and energy-saving operations across the board, accelerating the empowerment for the arrival of the Dual Carbon era. Since producing the first Magnetic Bearing Centrifugal Chiller in 2006, Haier Intelligent Buildings has pioneered 18 years of innovation. We have now independently developed and globally pioneered Vapor Suspension Centrifugal Chiller compressor technology, leading the era of oil-free levitation with optimal energy savings of over 50%, reaching an international leading standard. We have also obtained 28 patents and four energy conservation certifications. Currently, Haier's Oil-free technology has been implemented in over 5000 model projects worldwide, ranking first globally for five consecutive years.

# Haier Global Network

Haier has owned 10+N R&D centers, 35 industrial park, 143 manufacturing centers, 230K+ retailers across the world, and the sales network over 200 countries or regions.

Haier has seven major household appliance brands across the world: Haier, Casarte, Leader, AQUA, Fisher & Paykel, GE Appliances (GEA) and CANDY. All these brands together have constituted Haier's global brand cluster, which can fully meet the best experience of different consumer groups in different regions all across the world.

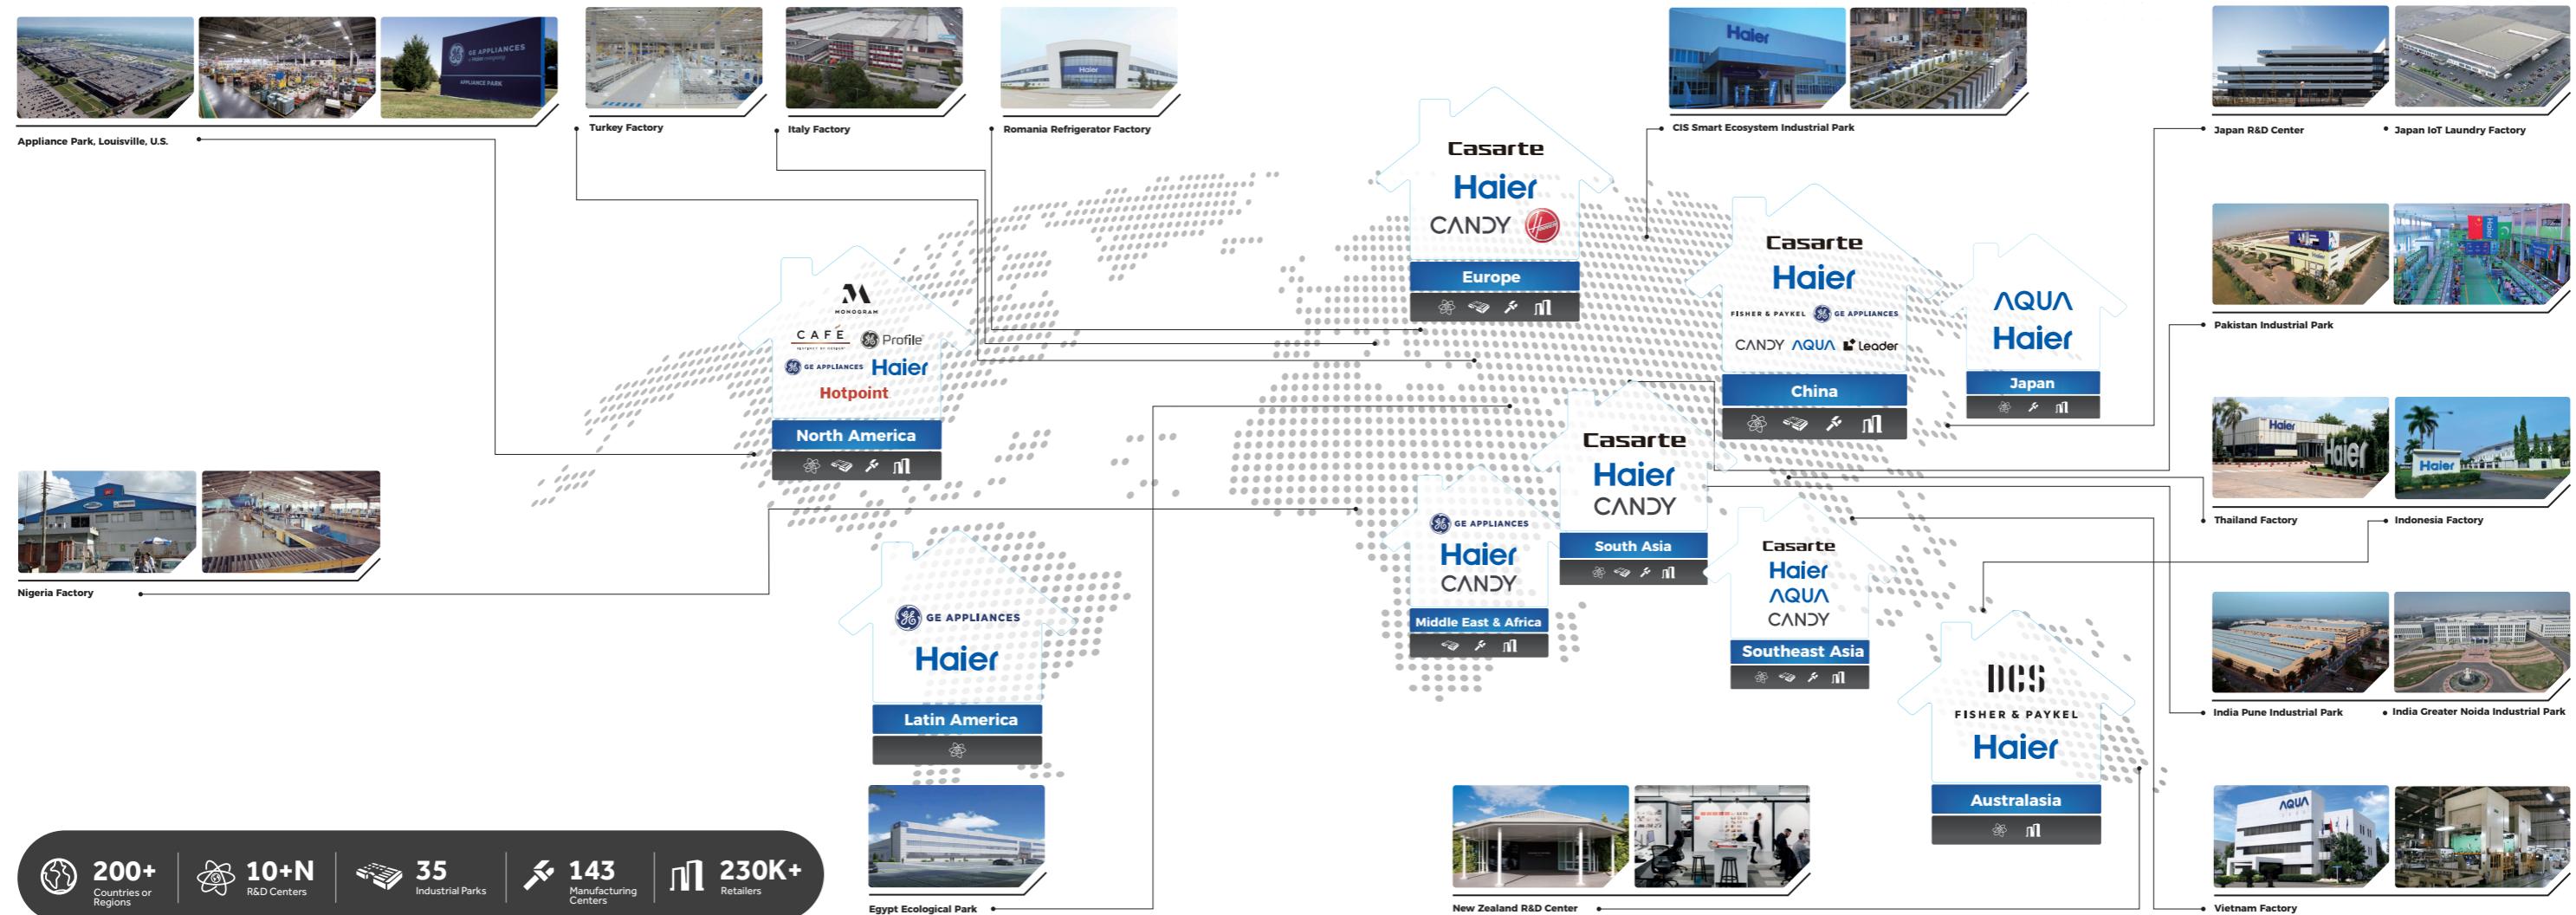

200+  
Countries or  
Regions



10+N  
R&D Centers



35  
Industrial  
Parks



143  
Manufacturing  
Centers



230K+  
Retailers

# Haier Global Manufacturing Capacity

In China, Haier owns 8 air conditioner factories, 1 of which is MHAQ, a JV between Haier and Mitsubishi Heavy. Besides China, Haier runs another 8 overseas air conditioner factories. These factories have a total production capacity of over 27.2 million units per year.



The First Batch of Chinese Local Enterprise Selected as  
**"Lighthouse Factory"**  
in the world





## Haier R&D Center

Haier Air Conditioning R&D Center, located in Qingdao, China, completed in December 2013, covers 20,000 square meters. It has more than 120 laboratories, including testing laboratories, key part research laboratories and all-weather user experience simulation laboratories. The R&D center also has the World's tallest "drop tower" for testing long refrigerant piping tests(106 meters tall).

In April 2014, Haier established joint laboratories with Highly for research in heating & cooling technology and with Mitsubishi Electric for innovative technology for user experience. Research by the user experience center covers the fields of user comfort evaluation, aerodynamics, acoustics, EMC(Electro-Magnetic Compatibility) and mechanics etc. The labs can carry out more than 600 international tests as per ISO, IEC, EN, CISPR and ANSI etc. to meet the requirements of Europe, Asia, America, Australia, Middle East and other 100 countries and regions.

The user experience center gains recognition by domestic well-known certification and testing institutions, also is recognized by international organizations like TUV and Intertek etc. At Haier, we believe that the best air conditioning is one that builds on uncompromising quality control worldwide, developing and manufacturing fine products and delivering them to customers everywhere.




Haier & Mitsubishi Joint Laboratory



Haier & HIGHLY Joint Laboratory

## R&D Labs

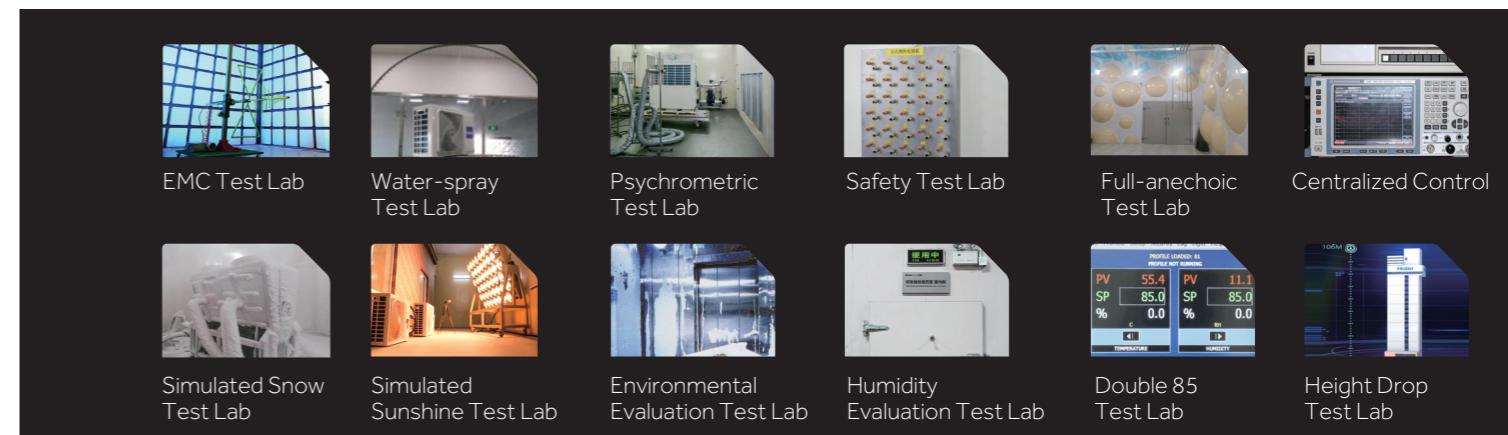

## Global Certification



# Haier Chiller Milestones

For 19 years, Haier created the history of Magnetic Bearing Centrifugal Chiller in China, starting the era of oil free.



# CONTENTS

- 001 CHILLER LINE-UP**
- 005 MAGNETIC BEARING CENTRIFUGAL CHILLER**
- 074 CENTRIFUGAL CHILLER**
- 090 SCREW CHILLER**
- 112 MODULAR CHILLER**
- 126 FAN COIL UNITS & AIR HANDLING UNITS**
- 184 REFERENCE PROJECTS**



# Models Line-up

Cooling capacity  
Heating capacity

0 100 300 500 700 900 1000 ..... 3000 5000 7000 9000 (kW)



## Chiller



R134a

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

440-8800kW



R513A

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

440-8800kW



R1234ze(E)

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

340-1830kW



R515B

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

340-1830kW



R134a

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

315/420/500kW

### CCW Series

Water-cooled  
magnetic  
bearing  
centrifugal  
chiller



R134a

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

315-1760kW

### CCA Series

Air-cooled  
magnetic bearing  
centrifugal chiller



R134a

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)

315/440/530kW

### CCE Series

Evaporatively  
-cooled magnetic  
bearing centrifugal  
chiller



R134a

VSD

2110-4570kW

### CNW Series

Water-cooled  
centrifugal chiller




R134a

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)


2290-4220kW

# Models Line-up

Cooling capacity  
Heating capacity

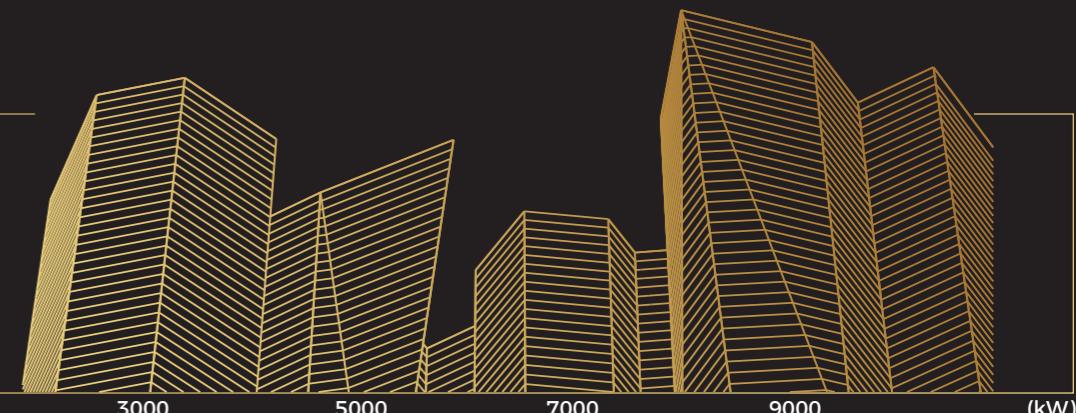


CIW Series Water-cooled screw chiller	R134a 	530-2100kW		
	R134a 	390-1900kW		
CIA Series Air-cooled screw chiller	R134a	320/440/530kW		
	R134a	340-830kW		
CAA Series Air-cooled scroll chiller	R32 	65/100/130kW		
	R410A 	70/100/140kW		
	R410A 	65/130kW		
	R410A 	70/140kW		
Air-side				
FC Series Fan coil unit	CE	340-2380m³/h		
	AHRI CERTIFIED	400-2380m³/h		
AH Series Air handling unit		2000-50000m³/h		
ZK Series Modular air handling unit	AHRI CERTIFIED	1863-203635m³/h		

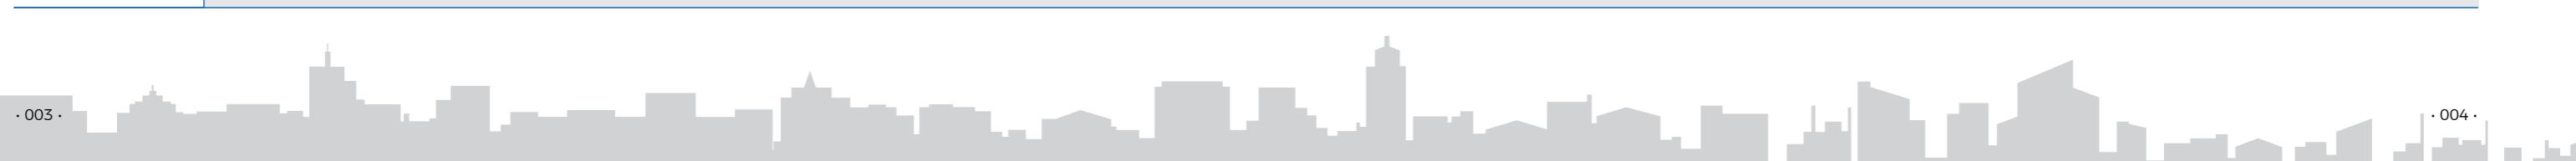

# MAGNETIC BEARING CENTRIFUGAL CHILLER



- 007** Magnetic Bearing Centrifugal Chiller
- 011** Water-cooled Magnetic Bearing Centrifugal Chiller
- 048** Modular Water-cooled Magnetic Bearing Centrifugal Chiller
- 054** Air-cooled Magnetic Bearing Centrifugal Chiller
- 064** Evaporatively-cooled Magnetic Bearing Centrifugal Chiller

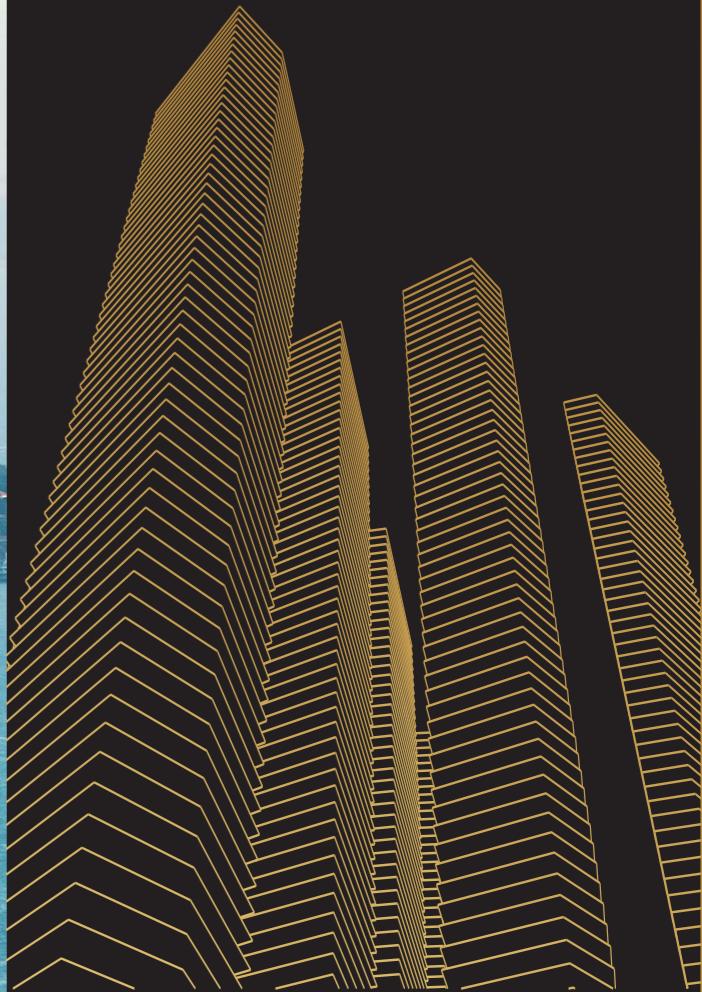

# Magnetic Bearing Centrifugal Chiller



## Advanced Technology

### High efficiency direct-driven technology

High speed motor drives the rotor and impeller directly, which eliminates the need for the gear system of conventional centrifugal compressor. It reduces the mechanical friction loss and noise, improves the efficiency and reliability greatly.




### Variable frequency drive


- Built-in IGBT (Insulated Gate Bipolar Transistor) is an inverter that converts a DC voltage, into an adjustable three-phase AC voltage.
- Signals from the motor/bearing controller determine the inverter output frequency, voltage and phase, thereby regulating the motor speed to meet different capacity output demands.

### Magnetic bearing technology

- Sensor rings, located at each magnetic bearing, feed information to the bearing controller to ensure the shaft is positioned correctly.
- Radial and axial magnetic bearings levitate the rotor shaft when the compressor is energized, which completely eliminates any metal-to-metal contact and wear surfaces.
- Magnetic bearing frictionless movement system provides quiet, reliable operation and eliminates the requirement of oil lubrication. Removing of oil system eliminates complexity, reduces maintenance and minimizes risk of catastrophic failure compared to traditional oiled designs.

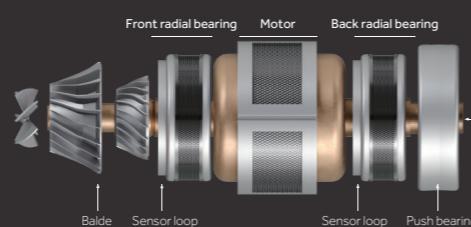

### Other technology

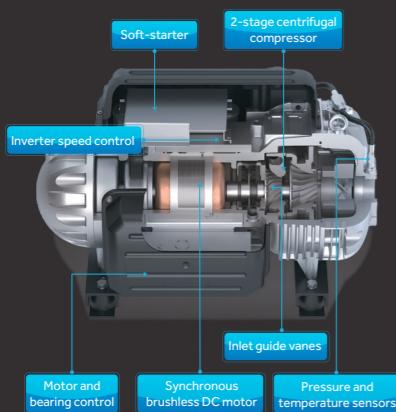

### Two-stage compressor

The compressor is a two-stage centrifugal type compressor utilizing variable speed as the principle means of capacity control with inlet guide vanes (IGVs) assisting when required, which allows a wider range of operation.

### Permanent-magnet synchronous motor

- Powered by PWM (pulse width modulated) voltage supply.
- High-speed variable frequency operation affords high efficiency, compactness and soft start benefits.

### Soft start module



Significantly reduces high in-rush current at startup, providing advantages to line power systems and reducing thermal stress on the stator.



## High Reliability

### Low startup current

The compressor startup in-rush current is only 2amps while conventional compressors in this tonnage range are up to 250-350 amps, which can greatly minimize the shock to power grid.

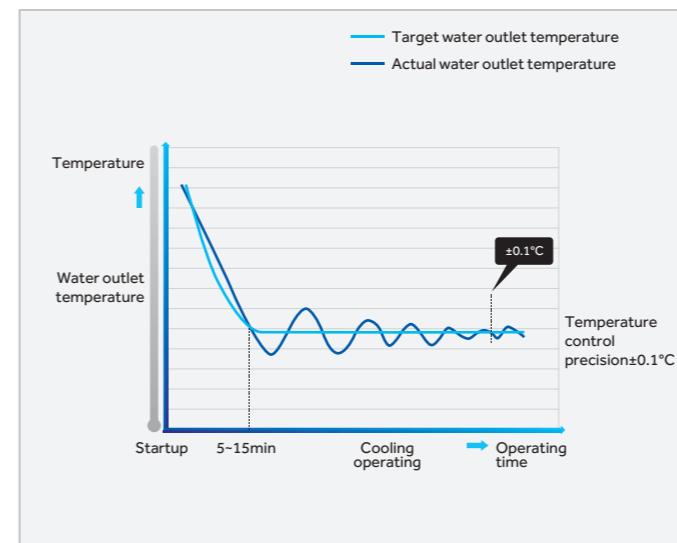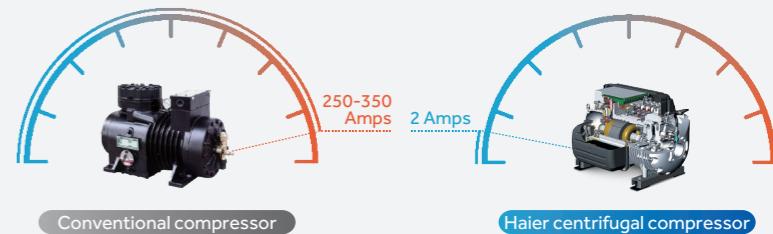

### Accurate water temperature


The chiller can realize stepless load adjustment and accurate water outlet temperature control. the temperature control precision is only  $\pm 0.1^{\circ}\text{C}$ .

### Quick startup (optional)

For some specific application scenarios, such as the data center, Haier offers customized products with quick cooling function to avoid the loss caused by long cooling time. also in case of power outages, Haier offers customized products to realize automatic restart once the power recovers to ensure quick recovery of cooling.

## Operating


Haier magnetic bearing centrifugal chillers are used in thousands of projects, including hotels, offices, hospitals, factories, shopping mall, universities, data centers, etc. excellent application experience helps Haier continuously improve the design and optimize the product, which brings the chiller high stability and reliability.

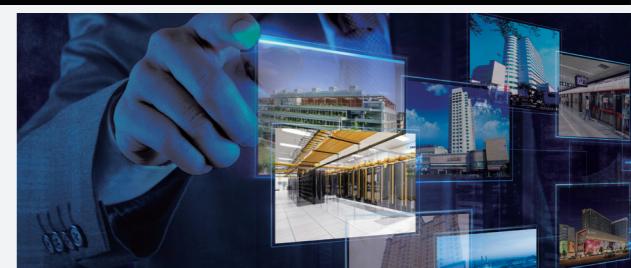

# High Efficiency

## Oil free system


Conventional compressors and chillers consume more energy due to the presence of lubricating oil that hinders heat transfer. even a chiller with an oil content of 4% may lose 9% efficiency. friction-free magnetic bearings eliminate the cost of those inefficiencies as well as the maintenance costs associated with oil service.

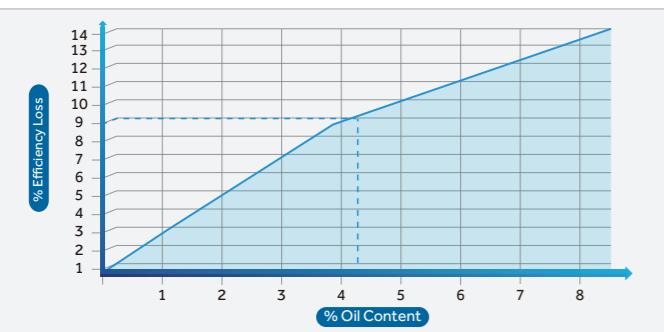

## Energy saving


Haier water-cooled magnetic bearing centrifugal chiller can achieve up to 11.5 IPLV at AHRI conditions. comparing with conventional chiller, it can save 30%-50% of energy to reduce the operating cost.

— Haier magnetic bearing centrifugal chiller   — Conventional inverter centrifugal chiller   — Conventional fixed-speed centrifugal chiller

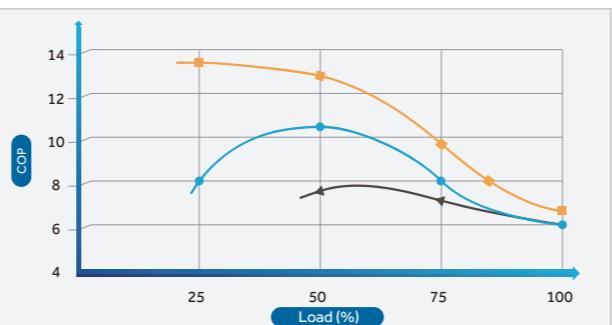

## Subcooling technology


Subcooling design is adopted for partial models of units. combined with the use of economizer, the highest supercooling degree can be up to 15°C, which increases cooling capacity by 8% and energy efficiency by 7%.

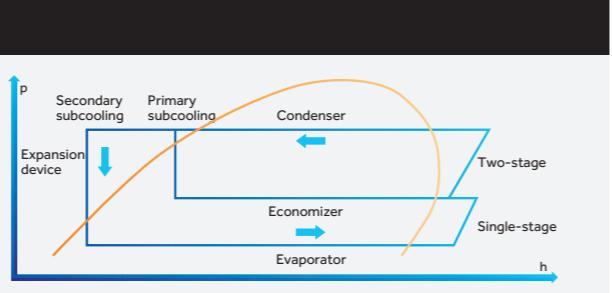

# Convenient

## Cloud service

Through the built-in internet cloud service protocol module, the chiller operating data can be collected to the cloud service center via 4G and ethernet, thereby achieving remote monitoring, fault alarm, energy consumption analysis and historical error.

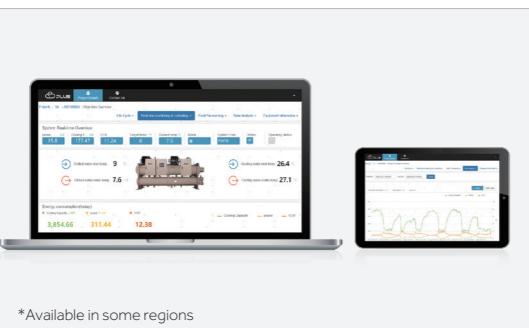

In addition, all the above function can be used via the smart APP. It's more convenient.



## Building automation system

The modbus and BACnet communication modules are provided for the seamless connection with building automation system.

# Professional

Haier magnetic bearing centrifugal chiller owns professional design, manufacturing, testing and after-sales service, providing the high reliability of whole process.



## Design

The chiller adopts compressor, EXV, controller and other key components of famous brands. all kinds of sensors, valves, electrical parts must be carried out more than 100 tests to ensure the reliability of the use of components. Industrial-grade PLC control achieves wider working temperature range and higher protection level.

Magnetic bearing centrifugal compressor eliminates the need for the gear system and oil lubrication system, which means simpler structures and lower possibility of failure. in addition, haier unique system design and control logic brings higher efficiency and reliability for the chiller.

## Manufacture

Haier smart interconnected factory provides the automatic intelligent manufacturing, which improves the production efficiency and quality reatly.

### Automatically expanding tube

ABB robot detects the position of copper tubes through visual recognition system and feeds back the parameters of expanding tube to realize expanding tube automatically. the positioning tolerance is only  $\pm 0.25\text{mm}$ , ensuring no defect and no missing expanding.



### Automatic cutting and welding

The robot finds the position for cutting and welding through the intelligent positioning system, which realizes full automation and greatly improves the efficiency. cutting tolerance is less than 1mm to ensure high quality.



### Automatic leak detection

ABB walking robot detects the position of copper tubes through visual recognition system, automatically finds the position and detects leakage, automatically checks system drawings, and automatically marks, so as to realize automatic leak detection.



## Testing

All models are qualified for AHRI certificate, so the products capacity and energy efficiency are guaranteed. moreover, all the units will be tested comprehensively at factory before the unit ships to the jobsite. And an optional witness test in our testing facility can be scheduled. In addition, Haier' s test facility is capable of evaluating the performance of the unit based on customer defied parameters. Haier' s laboratories are certified to provide professional evaluation of your products.



## After - sale service


Years of experience and a well-structured service organization allow Haier after sale service team to guarantee short reaction times and rapid trouble shooting.



# Water-cooled Magnetic Bearing Centrifugal Chiller



## Nomenclature

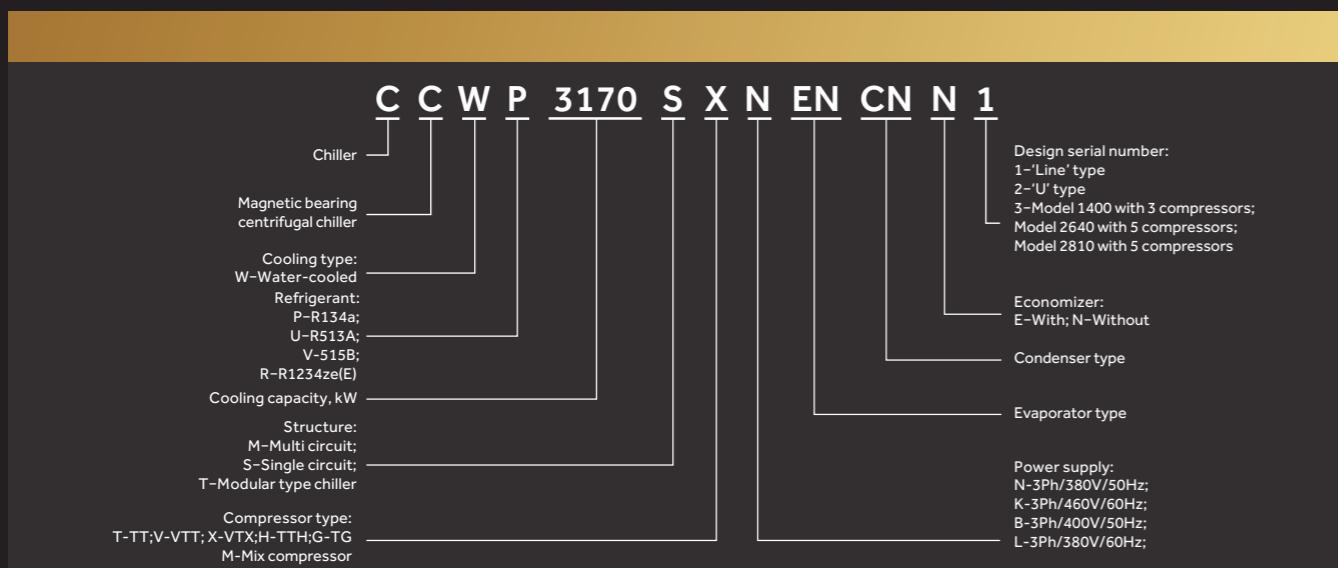

## New environmentally friendly refrigerant

### Application of new refrigerant

The magnetic bearing water centrifugal chiller has added three new types of refrigerant applications, which are safe and reliable and not subject to the Montreal Protocol. the GWP value is significantly reduced and greenhouse gas emissions are effectively reduced.

CCWU series: Using R513A refrigerant, the refrigeration characteristics are the same as R134a, GWP=537 non-toxic and non-combustible.

CCWR series: Use R1234ze(E) refrigerant, GWP < 1, non-toxic and slightly combustible.

CCWV series: Using R515B refrigerant, GWP=299, non-toxic and non-combustible.

## R1234ze(E)

### Environmental impact

Solstice ze has a GWP of <1, exceeding existing climate protection goals.

- Helps with eco-design directives
- Reduces direct CO<sub>2</sub> emissions by 99.6 percent
- Reduces indirect CO<sub>2</sub> emissions due to the lower energy consumption

### Safety



Solstice ze refrigerant is significantly safer in use than alternatives such as hydrocarbons and ammonia, which are either extremely flammable or highly toxic.



## High Efficiency

### Smart control

Except the magnetic bearing technology, Haier patented control technology helps enhance the energy efficiency greatly. it provides the best operating solution for the chiller. when the unit has multiple compressors, the load will be distributed to each compressor reasonably to ensure the optimal operating state of the compressors.

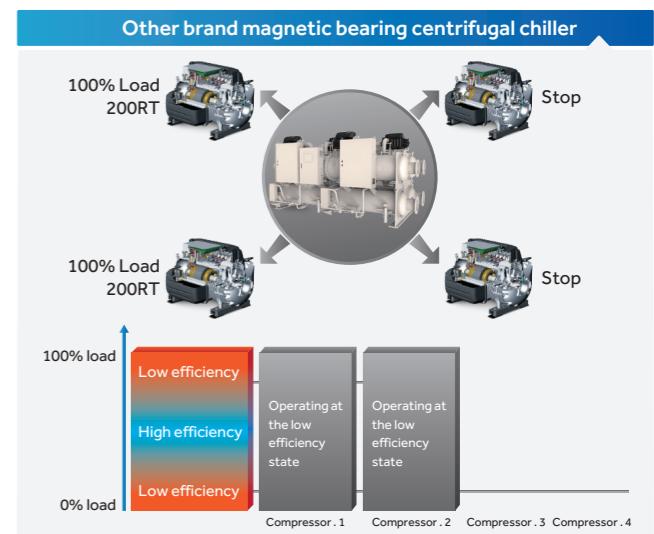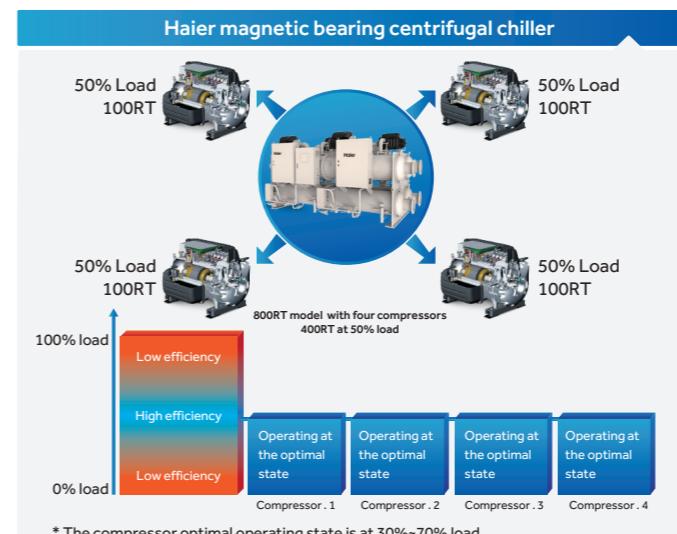

### Heat exchanger patented technology, performance increased by 5%

Evaporator: internal homogenizer patented design, ensure the uniformity of refrigerant distribution, strengthen the refrigerant convection disturbance; At the same time, the special tube layout technology is used to optimize the spacing of evaporation tubes, which effectively improves the heat transfer efficiency.




Condenser: The external thread of the heat exchange tube adopts the latest needle-like design, and the wave film is thinner and the thermal resistance is reduced. The special arrangement structure for group condensation of heat exchange tube is optimized by using special tube distribution technology to improve heat transfer efficiency.



# Comfortable

## Low sound level and vibration


Because of the completely levitated moving parts assembled by motor rotor shaft and impeller, there is no metal-to-metal contact between moving parts. very low sound and almost vibration-free level of the chiller are achieved. consequently, floor mounted spring isolators are not usually required. and the chiller's operation noise is as low as 75dB(A) at 1 meter, while the conventional chiller is higher than 85dB(A).

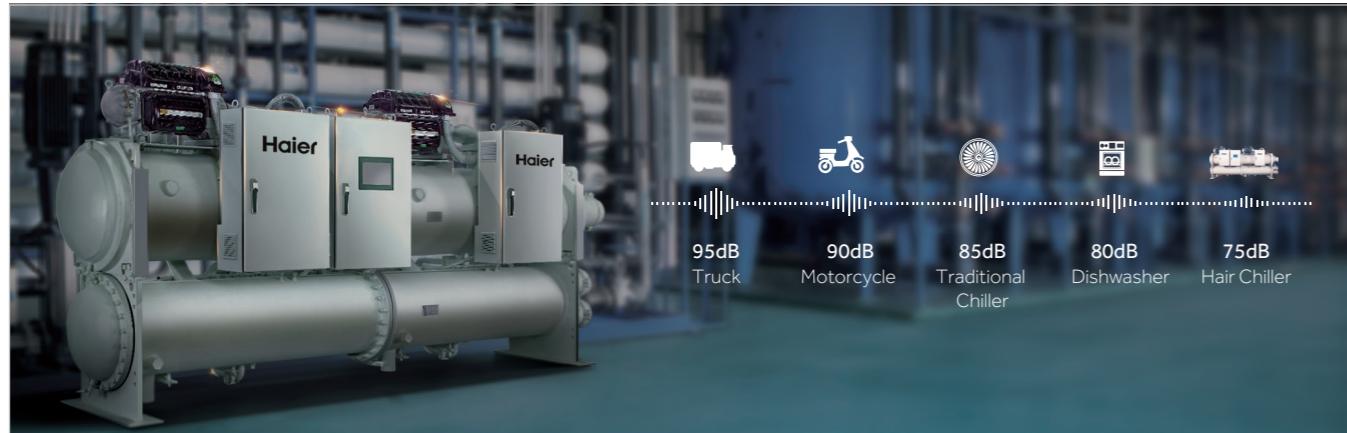


# High Reliability

## Condenser rubber ball cleaning system (optional)

Haier provides optional condenser rubber ball cleaning device for customers to solve the condenser fouling and scaling problems. the cleaning system runs fully automatically. the cleaning balls are introduced and removed from the system through the ball collector. the frequency and times of the ball service are adjusted according to the chiller operating condition, and the ball is powered by water pressure to clean the tube.

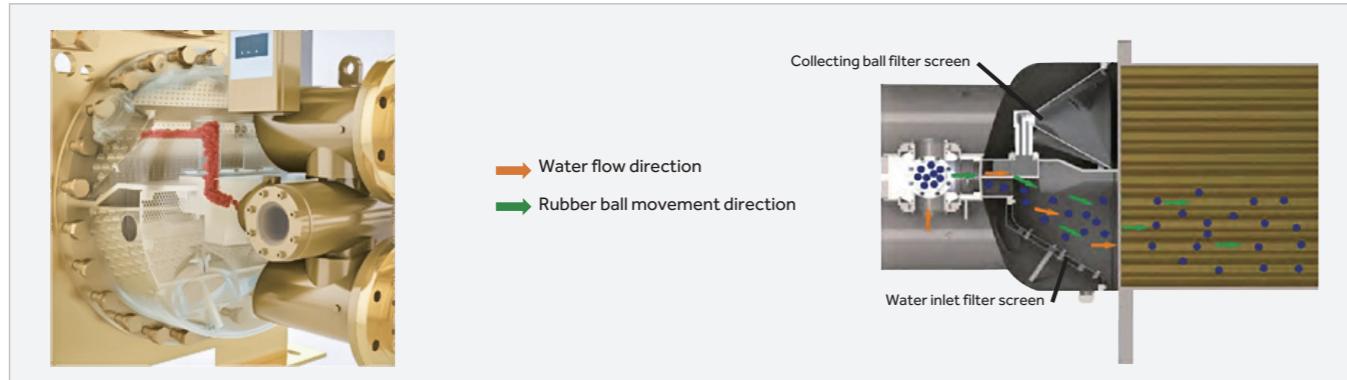


The use of condenser rubber ball cleaning device can maintain the cleanliness of the condenser tubes, optimize heat exchange efficiency and eliminate the requirement of manual cleaning in shut down times. thus the operating and maintenance costs will be greatly reduced.

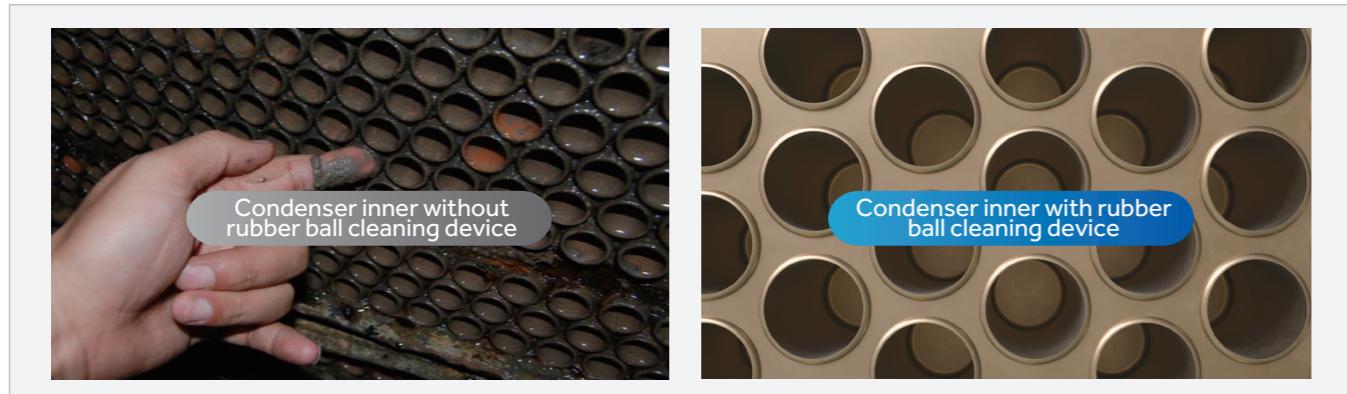

# Convenient

## User-friendly operation

The chiller is equipped with a 10 inch high-resolution touch screen, which provides an user-friendly operator interface with key operating parameters on the screen. this controller sets three access levels of account for users, maintenance and plant operators to ensure safe using.

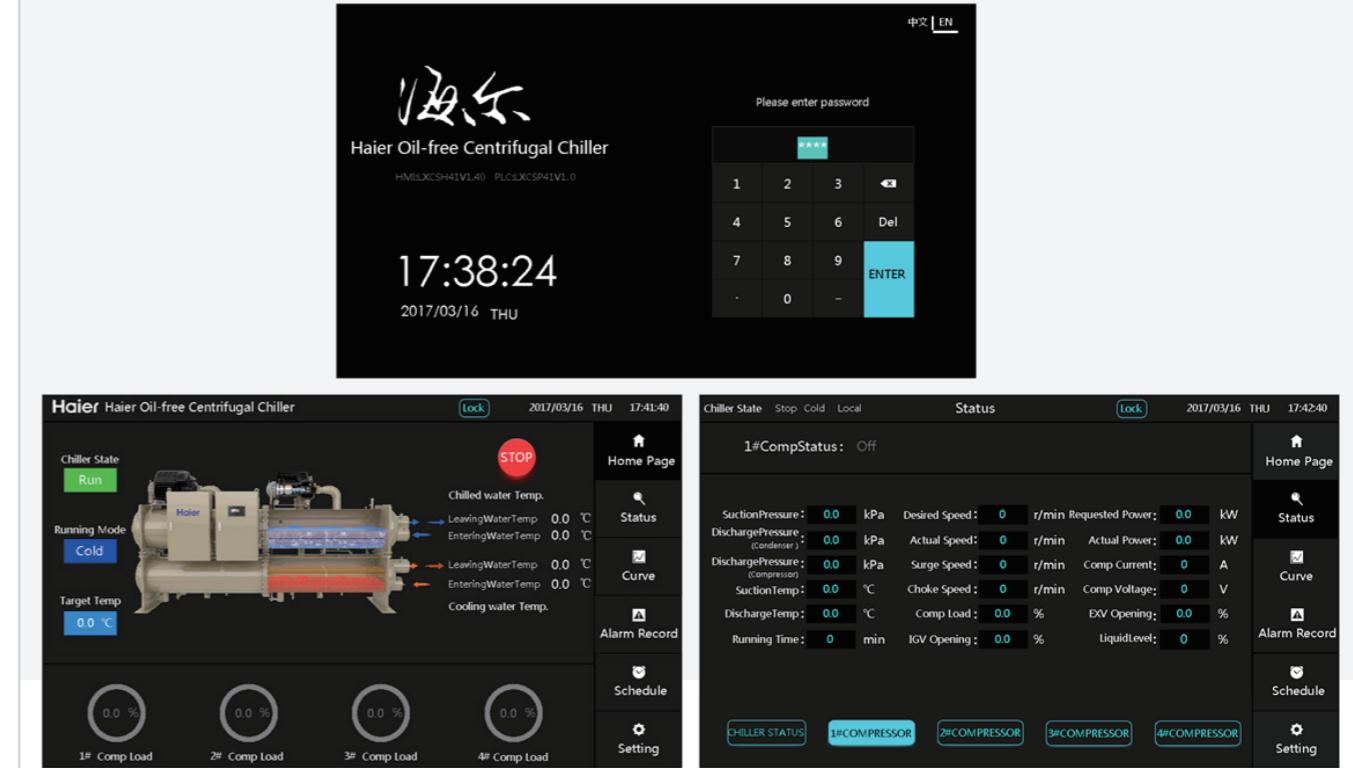


## Alarm history records

Haier control system has fault analysis function. users can easily access chiller alarm history via intuitive touch-screen buttons for troubleshooting. through the alarm records maintenance personnel will find fault date, action taken and the cause of the alarm.

# Options/Accessories

Accessories		Standard	Optional
Power supply		3-/380V/50Hz	3-/380V/60Hz; 3-/400V/50Hz; 3-/460V/60Hz
Communication protocol		Cloud service	Modbus/BACnet
Harmonic filter		X	✓
Surge suppressors		✓	/
EMC/EMI filter		✓	/
Economizer	≤800RT >800RT	✓ X	✓ ✓
Water inlet/outlet connection type	<DN300 ≥DN300	Victaulic Flange	Flange /
Thermal insulation thickness		30mm	25mm/40mm
Water side working pressure		1.0Mpa	1.6MPa/2.0MPa/2.5MPa
ASME pressure vessel		X	✓
Chilled water flowmeter		X	✓
Automatic online rubber ball cleaning device		X	✓
Channel steel base		X	✓
Refrigeration cycle system	≤800RT >800RT	Modular refrigeration cycle system Incorporative refrigeration cycle system	Incorporative refrigeration cycle system /

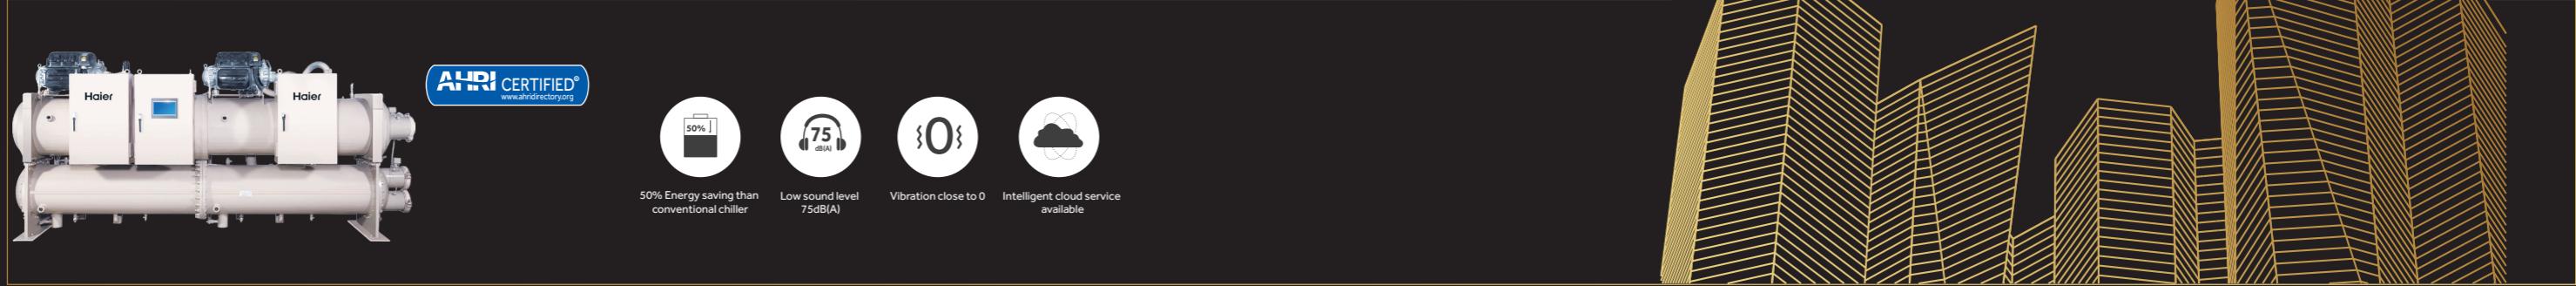

MODEL		CCWP0440 MTN0000E1	CCWP0530 MTN0101E1	CCWP0740 MTN0000E1	CCWP0880 MTN2020E1	CCWP1100 MTN2121E1		CCWP1230 MTN2625E1	CCWP1330 MTN2222E1	CCWP1400 MTN2625E1	CCWP1580 MTN2020E1	CCWP1760 MTN2020E2	CCWP1930 MTN2020E2	CCWP2110 MTN2121E2	CCWP2640 MTN2625E2	CCWP2810 MTN2625E2	
Cooling capacity	Ton	125	150	200	250	300		350	380	400	450	500	550	600	750	800	
	kW	439.6	527.6	703.4	879.2	1055		1231	1336	1407	1583	1758	1934	2110	2638	2814	
Power input	kW	73.13	87.36	117.0	139.2	166.2		191.7	205.1	222.3	239.5	264.5	289.4	316.9	410.5	438.3	
COP	kW/kW	6.01	6.04	6.01	6.31	6.35		6.42	6.52	6.33	6.61	6.65	6.68	6.66	6.43	6.42	
	kW/Ton	0.585	0.582	0.585	0.557	0.554		0.548	0.540	0.556	0.532	0.529	0.526	0.528	0.547	0.548	
Starting amps of single compressor	A	2	2	2	2	2		2	2	2	2	2	2	2	2	2	
Min circuit amps.(Max. running current)	A	178	180	225	178×2	180×2		180+225	178×3	225×2	180×3	178×4	180×4	180×4	180+225×3	225×4	
Max. power input	kW	109	110	138	109×2	110×2		110+138	109×3	138×2	110×3	109×4	110×4	110×4	110+138×3	138×4	
Safe protection	/																
Compressor	Type	/															
	Starting mode	/															
Power supply																	
Refrigerant throttle type																	
Controller type																	
Refrigerant	Type															R134a	
	Charge	kg	160	170	280	320	340		400	540	460	600	760	760	800	860	920
Evaporator	Type															Flooded type	
	Chilled water inlet/outlet temp.															12°C/7°C	
	Connection size	DN	150	150	150	200	200		200	200	200	250	250	250	300	300	
	Rated water flow	m³/h	75.6	90.7	121.0	151.2	181.5		211.7	229.8	242.0	272.3	302.4	332.6	362.9	453.7	484.0
	Fouling factor	m²·°C/kW														0.0180	
	Standard pressure	MPa														1.0	
	Pass	/	4	4	2	2	2		2	1*	2	1*	2	2	2	2	
	Water side pressure drop	kPa	73.6	74.2	47.0	73.3	59		69.6	36.7	78.4	46.2	63.7	75.5	75.1	89.0	78.6
	Type															Shell & tube heat exchanger	
Condenser	Cooling water inlet/outlet temp.															30°C/35°C	
	Connection size	DN	150	150	150	200	200		200	200	200	250	250	250	300	300	
	Rated water flow	m³/h	88.2	105.8	141.1	175.2	210.0		244.7	265.1	280.2	313.5	347.9	382.4	417.4	524.3	559.4
	Fouling factor	m²·°C/kW														0.0440	
	Standard pressure	MPa														1.0	
	Pass		4	4	2	2	2		2	1*	2	1*	2	2	2	2	
	Water side pressure drop	kPa	67.6	62.5	42.7	43.1	50.2		59.5	45.8	60.8	47.8	48.6	68.4	64.4	80.6	74.9
	Unit length	mm	2250	2250	3250	3830	3830		4150	6400	4450	6400	4800	4800	4800	4800	
	Unit width	mm	1300	1300	1300	1300	1300		1300	1300	1300	1300	2260	2260	2260	2260	
External dimension	Unit height	mm	2260	2260	2260	2260	2260		2260	2260	2260	2260	2260	2260	2260	2260	
	Net weight	kg	2270	2380	2550	3740	4030		4530	5130	4880	5400	8200	8300	8350	9600	9900
	Gross weight	kg	2310	2420	2590	3790	4080		4580	5200	4930	5480	8280	8380	8430	9680	9980
Weight	Operation weight	kg	2520	2680	2900	4170	4500		5130	5880	5530	6150	9200	9400	9450	10700	11000

Note:

1. Specification is based on the following condition:  
Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.0180m²K/kW.  
Condenser cooling water inlet water temperature 30°C, cooling water outlet temperature 35°C, fouling factor=0.0440m²K/kW.


2. Due to decimal point retention restrictions, some data may have slight differences when manually calculated.

3. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.

4. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.

5. Due to our policy of innovation, some specifications maybe changed without notification.

6.\*Can be configured as 2pass, please consult Haier sales staff.

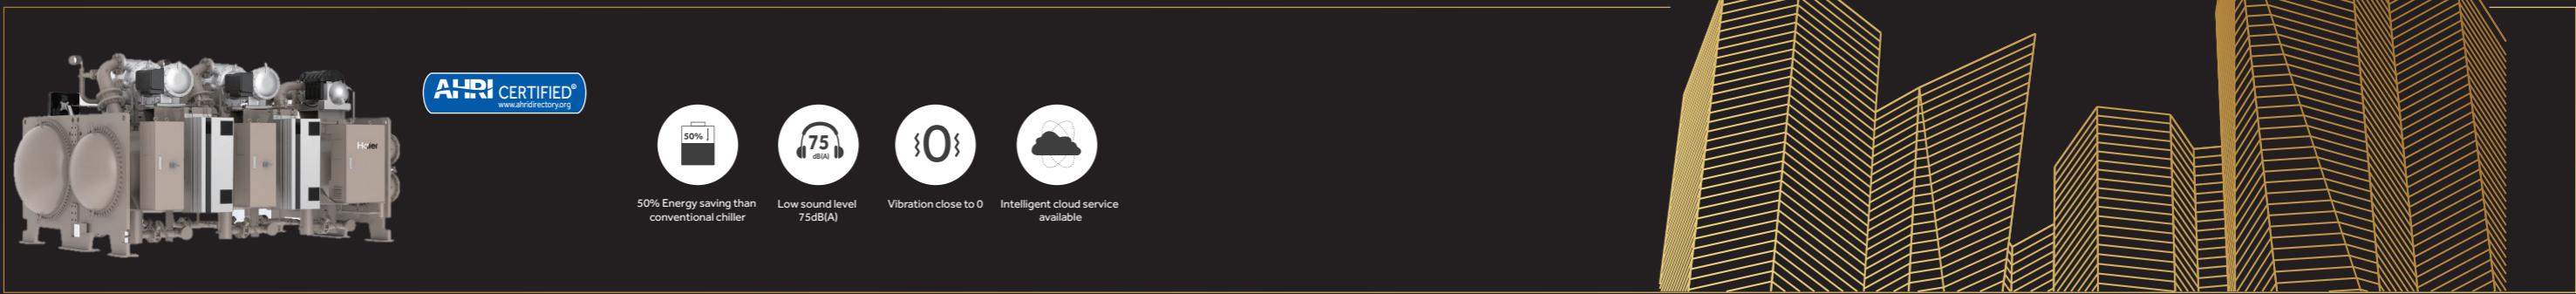


MODEL		CCWP3170 SXNENCNN1	CCWP3520 SMNENCNN1	CCWP4220 SMNENCNN1		CCWP4570 SXNENCNN1	CCWP5280 SMNENCNN1	CCWP5630 SXNENCNN1	CCWP5980 SXNENCNN1	CCWP7030 SXNENCNN1	CCWP8800 SXNENCNN1
Cooling capacity	Ton	900	1000	1200		1300	1500	1600	1700	2000	2500
	kW	3165	3517	4220		4572	5276	5627	5979	7034	8792
Power input	kW	489.9	558.7	666.9		707.7	828.6	878.1	927.0	1084	1352
COP	kW/kW	6.46	6.30	6.33		6.46	6.37	6.41	6.45	6.49	6.50
Max.power input	kW	0.544	0.559	0.556		0.544	0.552	0.549	0.545	0.542	0.541
Starting amps of single compressor	A	2	2	2		2	2	2	2	2	2
Min circuit amps. (Max. running current)	A	419×2	180+419×2	180×2+419×2		419×3	180+419×3	419×4	419×4	419×5	419×6
Max. power input	kW	256×2	110+256×2	110×2+256×2		256×3	110+256×3	256×4	256×4	256×5	256×6
Safe protection	/										
Compressor	Type	/									
	Starting mode	/									
Power supply											
Refrigerant throttle type											
Controller type											
Refrigerant	Type										
	Charge	kg	1000	1100	1600	1700	1900	2500	2600	2900	3000
Evaporator	Type										
	Chilled water inlet/outlet temp.										
	Connection size	DN	300	300	350	350	400	400	400	450	500
	Rated water flow	m³/h	544.4	604.8	725.8	786.2	907.6	967.9	1028.5	1210.0	1512.4
	Fouling factor	m²•°C/kW									
	Standard pressure	MPa									
	Pass	/	2	2	2	2	2	2	2	2	2
	Water side pressure drop	kPa	55.1	57.0	79.0	81.1	80.1	42.0	35.0	55.0	61.0
Condenser	Type										
	Cooling water inlet/outlet temp.										
	Connection size	DN	300	300	350	350	400	400	400	450	500
	Rated water flow	m³/h	628.6	701.0	840.6	908.1	1049.9	1118.9	1187.8	1396.3	1744.8
	Fouling factor	m²•°C/kW									
	Standard pressure	MPa									
	Pass		2	2	2	2	2	2	2	2	2
	Water side pressure drop	kPa	66.9	70.0	78.9	80.0	85.0	60.0	49.0	75.0	74.7
External dimension	Unit length	mm	4600	4600	5500	5800	5800	6500	6500	7260	7260
	Unit width	mm	2400	2800	3000	3000	3200	3450	3450	3450	4000
	Unit height	mm	2600	2400	2450	2450	2500	2550	2550	3000	3000
Weight	Net weight	kg	11440	13000	14500	16320	18320	20290	21290	24580	28660
	Gross weight	kg	11590	13150	14650	16470	18470	20440	21440	24730	28810
	Operation weight	kg	13440	15200	17000	19320	21320	24290	25500	29580	34660




Note:

1. Specification is based on the following condition:  
Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.0180m²K/kW.  
Condenser cooling water inlet water temperature 30°C, cooling water outlet temperature 35°C, fouling factor=0.0440m²K/kW.
- 2.Due to decimal point retention restrictions, some data may have slight differences when manually calculated.
3. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.
4. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.
5. Due to our policy of innovation, some specifications maybe changed without notification.

# Dimensions



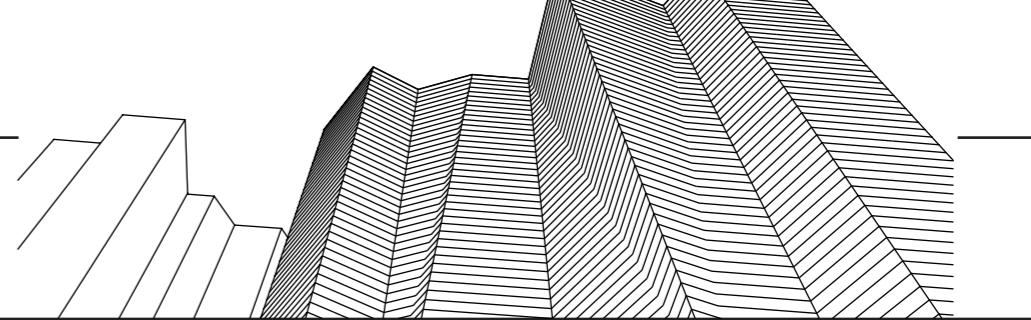


Outline dimension

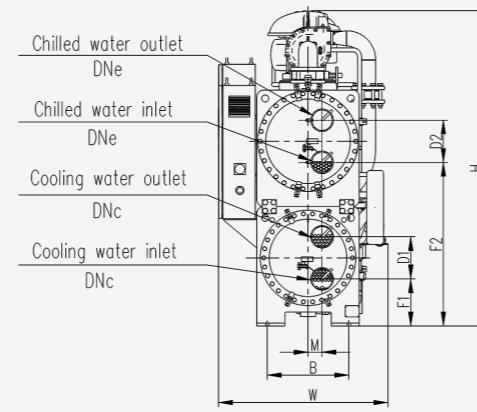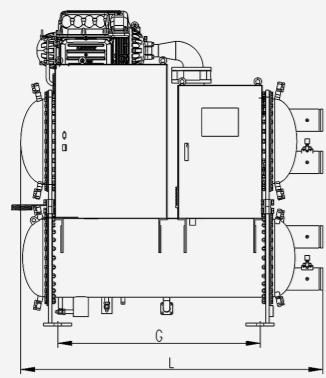

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	M	DNe	DNc
CCWP0440MTN0000E1		2250	1300	2260	580	1440	335	300	1125	300	100	DN150	DN150
CCWP0530MTN0101E1		2260	1300	2260	580	1440	335	300	1125	300	100	DN150	DN150




\*Please acquire detailed dimensions from Haier technicians.

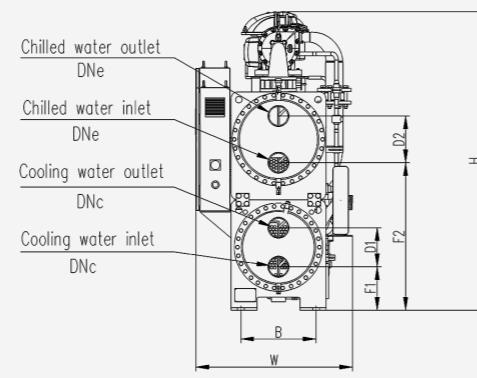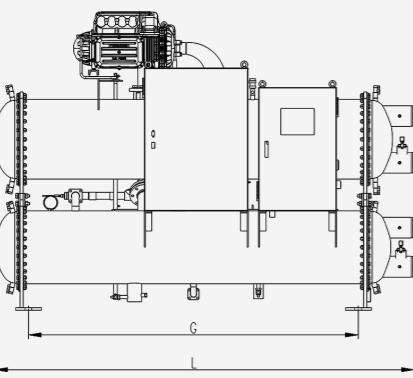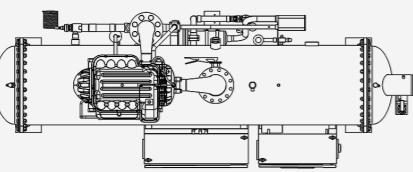

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNc	
CCWP0740MTN0000E1		3250	1300	2260	580	2540	335	300	1095	360	DN150	DN150	




\*Please acquire detailed dimensions from Haier technicians.

Outline dimension

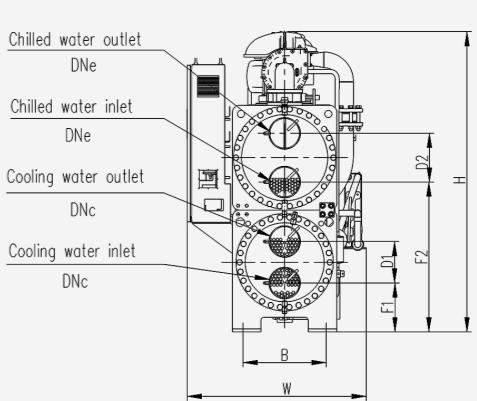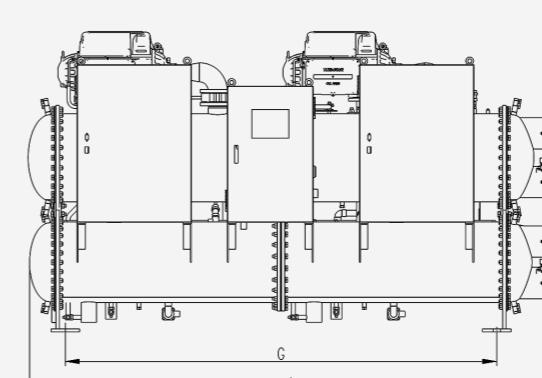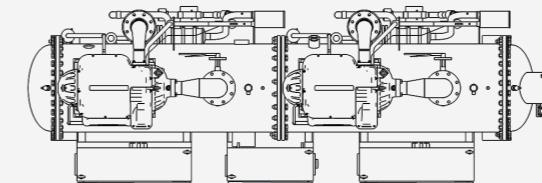

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNc	
CCWP0880MTN2020F1		3830	1300	2260	580	3010	340	290	1105	340	DN200	DN200	
CCWP1100MTN2121E1		3830	1300	2260	580	3010	340	290	1105	340	DN200	DN200	


\*Please acquire detailed dimensions from Haier technicians.

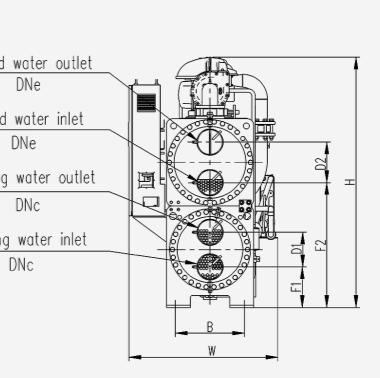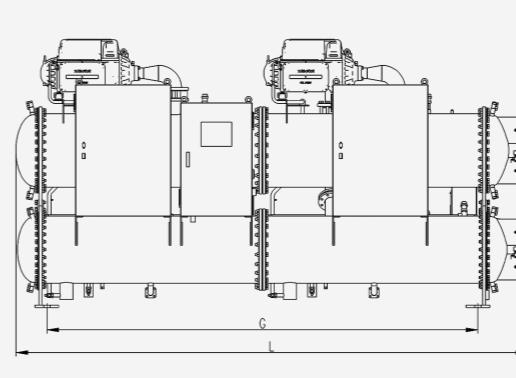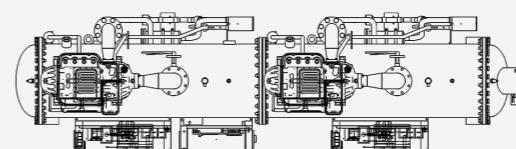



Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNc	
CCWP1230MTN2625E1		4150	1300	2260	580	3310	340	290	1105	340	DN200	DN200	
CCWP1400MTN2625E1		4450	1300	2260	580	3610	340	290	1105	340	DN200	DN200	

\*Please acquire detailed dimensions from Haier technicians.

# Dimensions


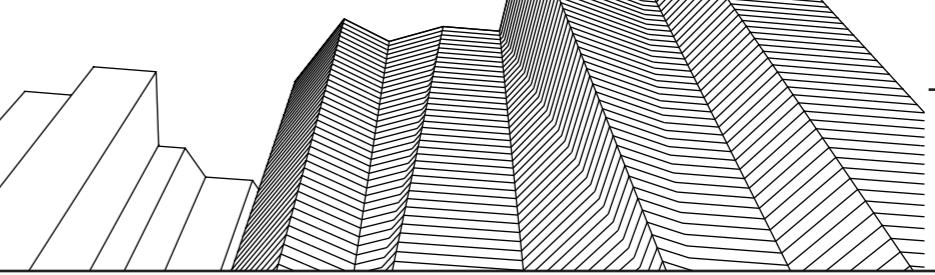


Outline dimension

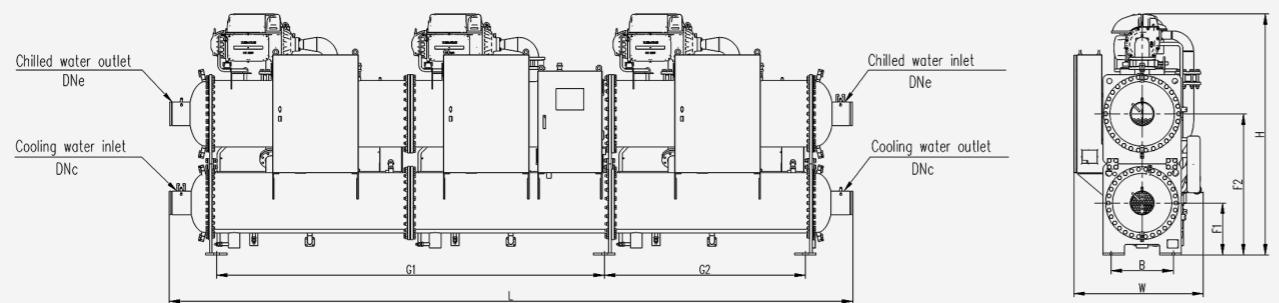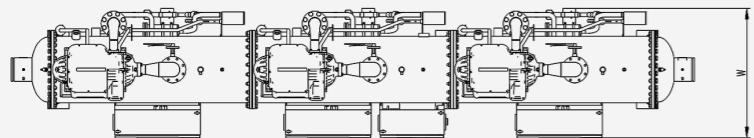

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)		
		L	W	H	B	G1	G2	F1	F2	DNe
CCWP1330MTN2222E1		6400	1300	2260	580	3610	1870	485	1275	DN200
CCWP1580MTN2020E1		6400	1300	2260	580	3610	1870	485	1275	DN250




\*Please acquire detailed dimensions from Haier technicians.

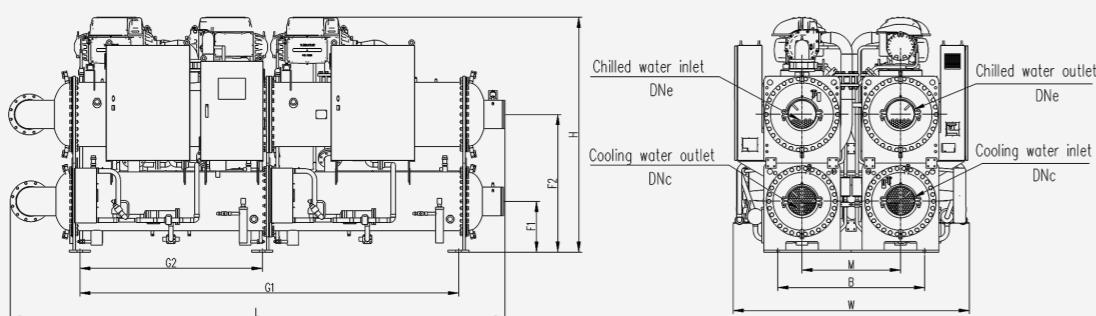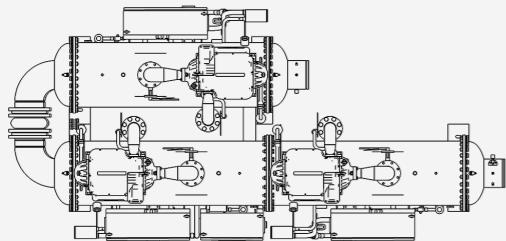

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)				
		L	W	H	B	G1	G2	F1	F2	M	DNe	DNC
CCWP1330MTN2222E2		4800	2260	2260	1520	3610	1740	485	1275	940	DN200	DN200
CCWP1580MTN2020E2		4800	2260	2260	1520	3610	1740	485	1275	940	DN250	DN250

\*Please acquire detailed dimensions from Haier technicians.


Outline dimension

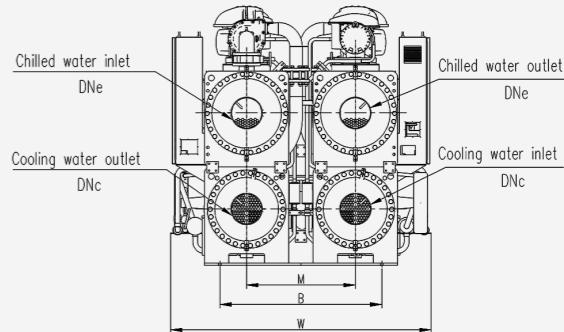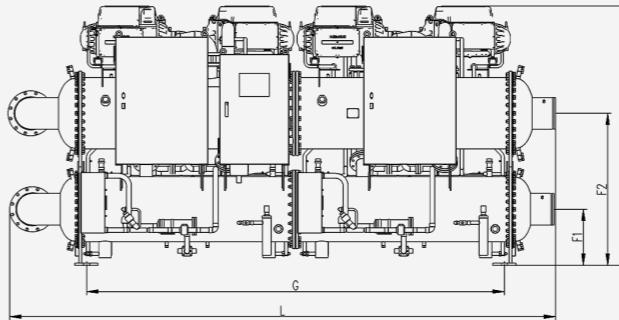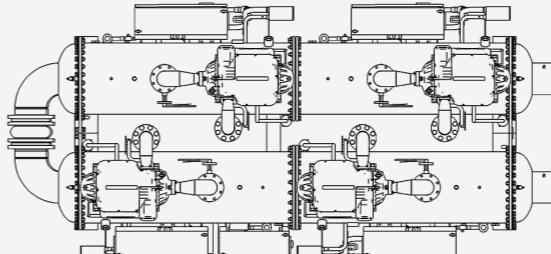



Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)				
		L	W	H	B	G	F1	F2	M	DNe	DNC
CCWP1760MTN2020E2		4800	2260	2260	1400	3610	485	1275	940	DN250	DN250
CCWP1930MTN2020E2		4800	2260	2260	1400	3610	485	1275	940	DN300	DN300
CCWP2110MTN2121E2											
CCWP2640MTN2625E2											
CCWP2810MTN2625E2											

\*Please acquire detailed dimensions from Haier technicians.

# Dimensions


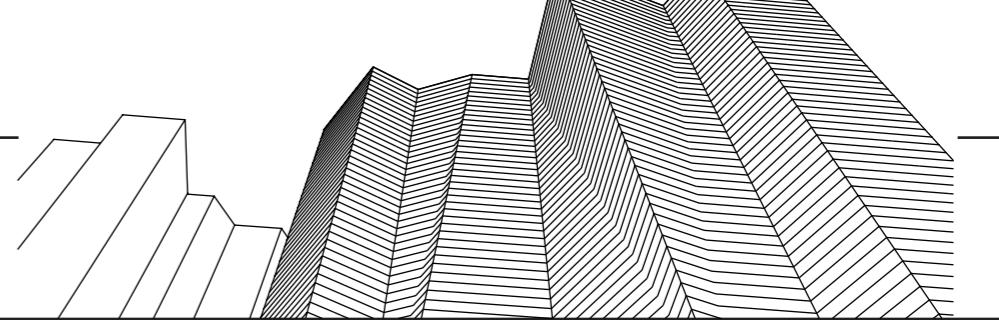


Outline dimension

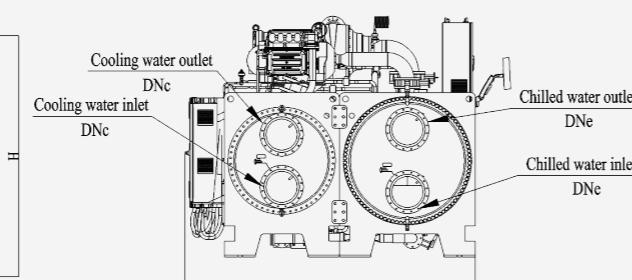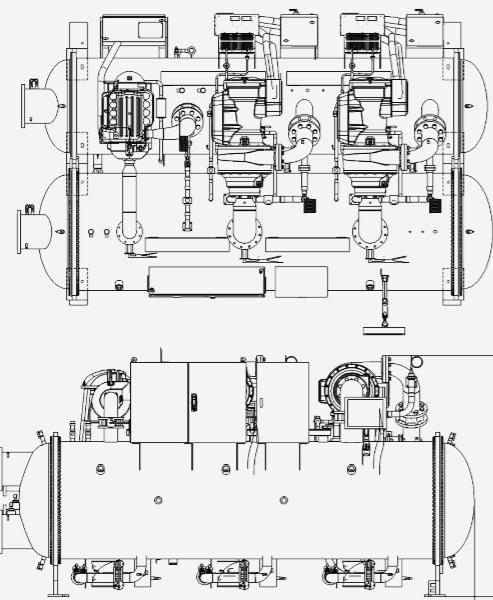

Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNc
CCWP3520SMNENCNN1		4600	2800	2400	DN300	DN300




\*Please acquire detailed dimensions from Haier technicians.

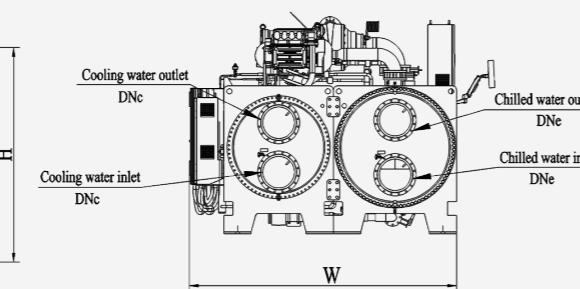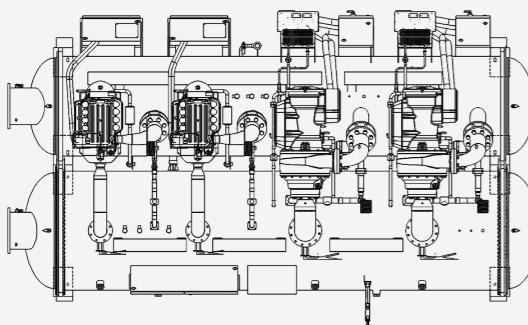

Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNc
CCWP4220SMNENCNN1		5500	3000	2450	DN350	DN350




\*Please acquire detailed dimensions from Haier technicians.

Outline dimension

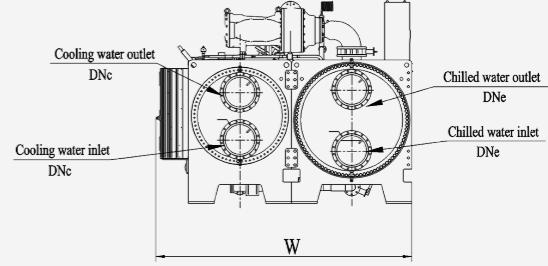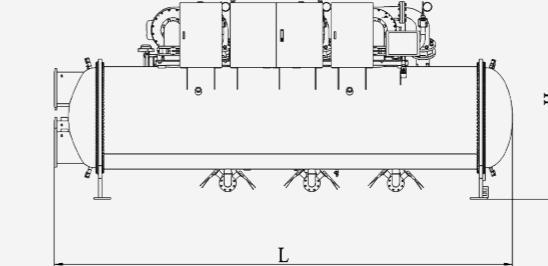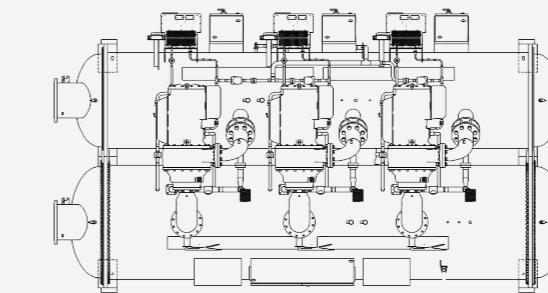

Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNc
CCWP4570SXNENCNN1		5800	3000	2450	DN350	DN350


\*Please acquire detailed dimensions from Haier technicians.

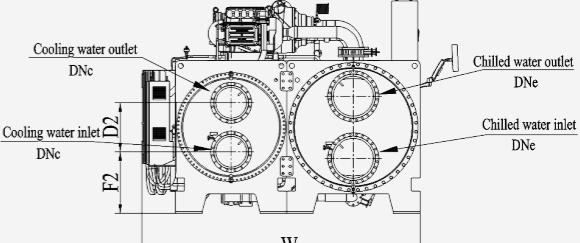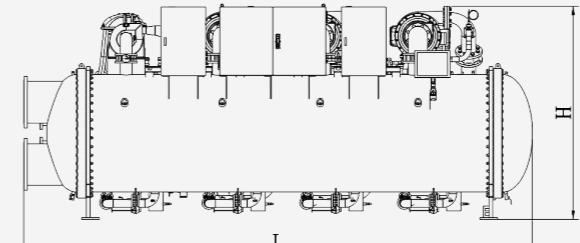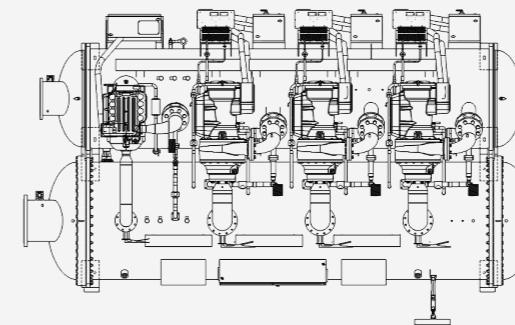




Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNc
CCWP5280SMNENCNN1		5800	3200	2500	DN400	DN400

\*Please acquire detailed dimensions from Haier technicians.

# Dimensions



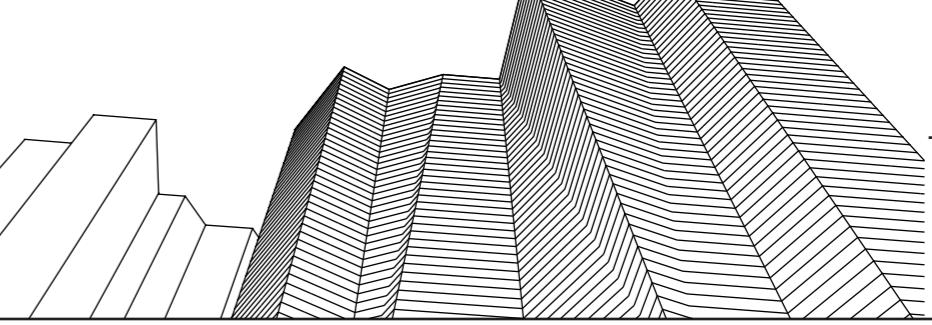


Outline dimension

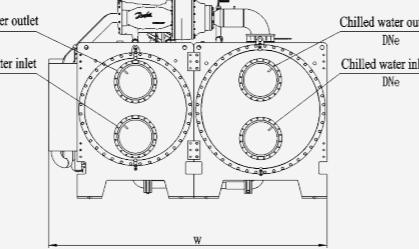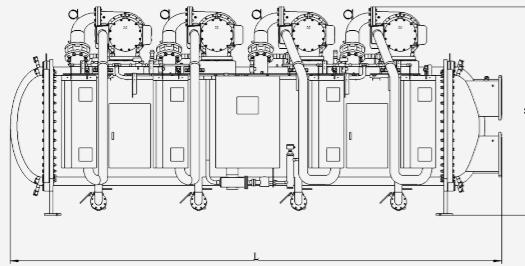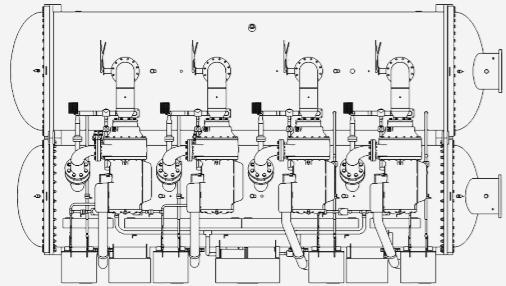

Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNC
CCWP5630SXNENCNN1		6500	3450	2550	DN400	DN400
CCWP5980SXNENCNN1						




\*Please acquire detailed dimensions from Haier technicians.

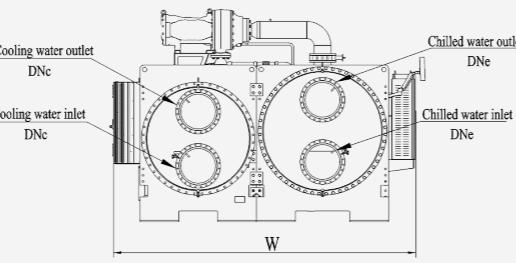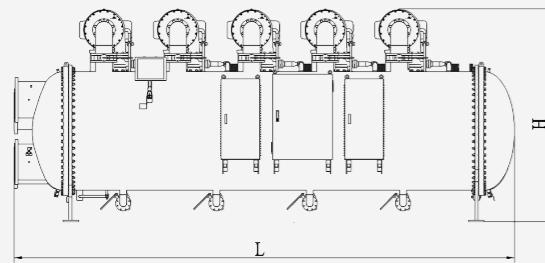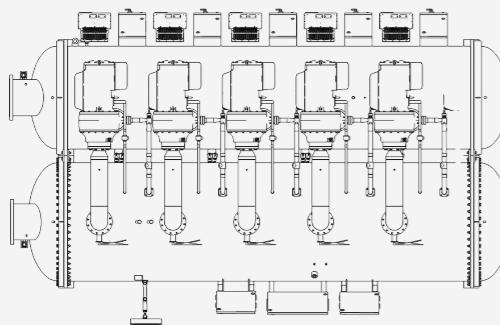

Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNC
CCWP7030SXNENCNN1		7260	3450	3000	DN450	DN350

\*Please acquire detailed dimensions from Haier technicians.


Outline dimension

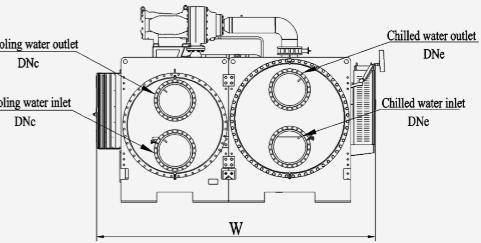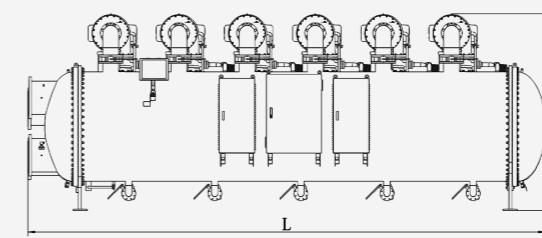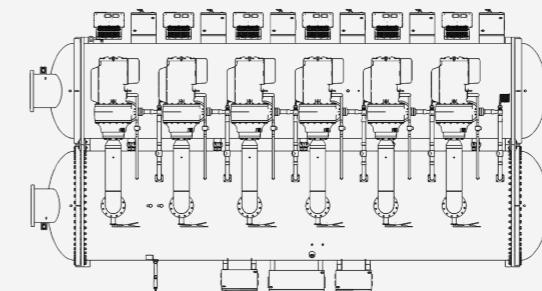

Model	Code	Boundary Dimensions(mm)			Nozzle Dimensions(mm)	
		L	W	H	DNe	DNC
CCWP8800SXNENCNN1		7260	4000	3000	DN500	DN500

\*Please acquire detailed dimensions from Haier technicians.

# Dimensions

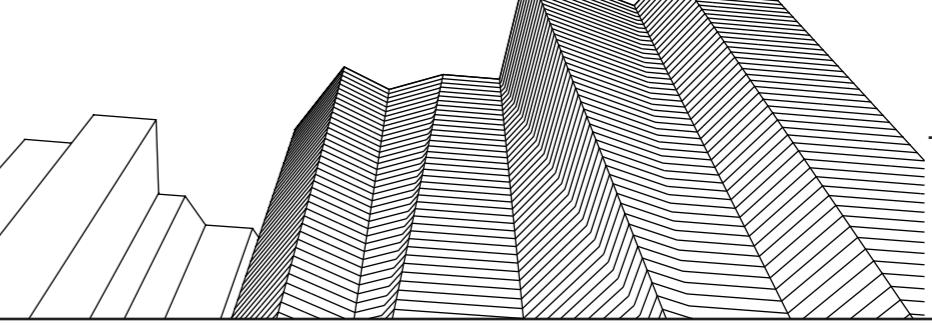

Installation foundation drawing			
CCWP0440MTN0000E1~CCWP1230MTN0605E1, CCWP1400MTN0605E1			
Model	G(mm)	B(mm)	
CCWP0440MTN0000E1	1440	580	
CCWP0530MTN0101E1	1440	580	
CCWP0740MTN0000E1	2540	580	
CCWP0880MTN0000E1	3010	580	
CCWP1100MTN0101E1	3010	580	
CCWP1230MTN0605E1	3310	580	
CCWP1400MTN0605E1	3610	580	


CCWP1330MTN0202E1, CCWP1580MTN0000E1(Line type)			
Model	G1(mm)	G2(mm)	B(mm)
CCWP1330MTN0202E1	3610	1870	580
CCWP1580MTN0000E1	3610	1870	580


  

CCWP1330MTN0202E2, CCWP1580MTN0000E2(U type)			
Model	G1(mm)	G2(mm)	B(mm)
CCWP1330MTN0202E2	3610	1740	1520
CCWP1580MTN0000E2	3610	1740	1520

CCWP1760MTN0000E2~CCWP2810MTN0605E2			
Model	G(mm)	B(mm)	
CCWP1760MTN0000E2	3610	1400	
CCWP1930MTN0000E2	3610	1400	
CCWP2110MTN0101E2	3610	1400	
CCWP2640MTN0605E2	3610	1400	
CCWP2810MTN0605E2	3610	1400	



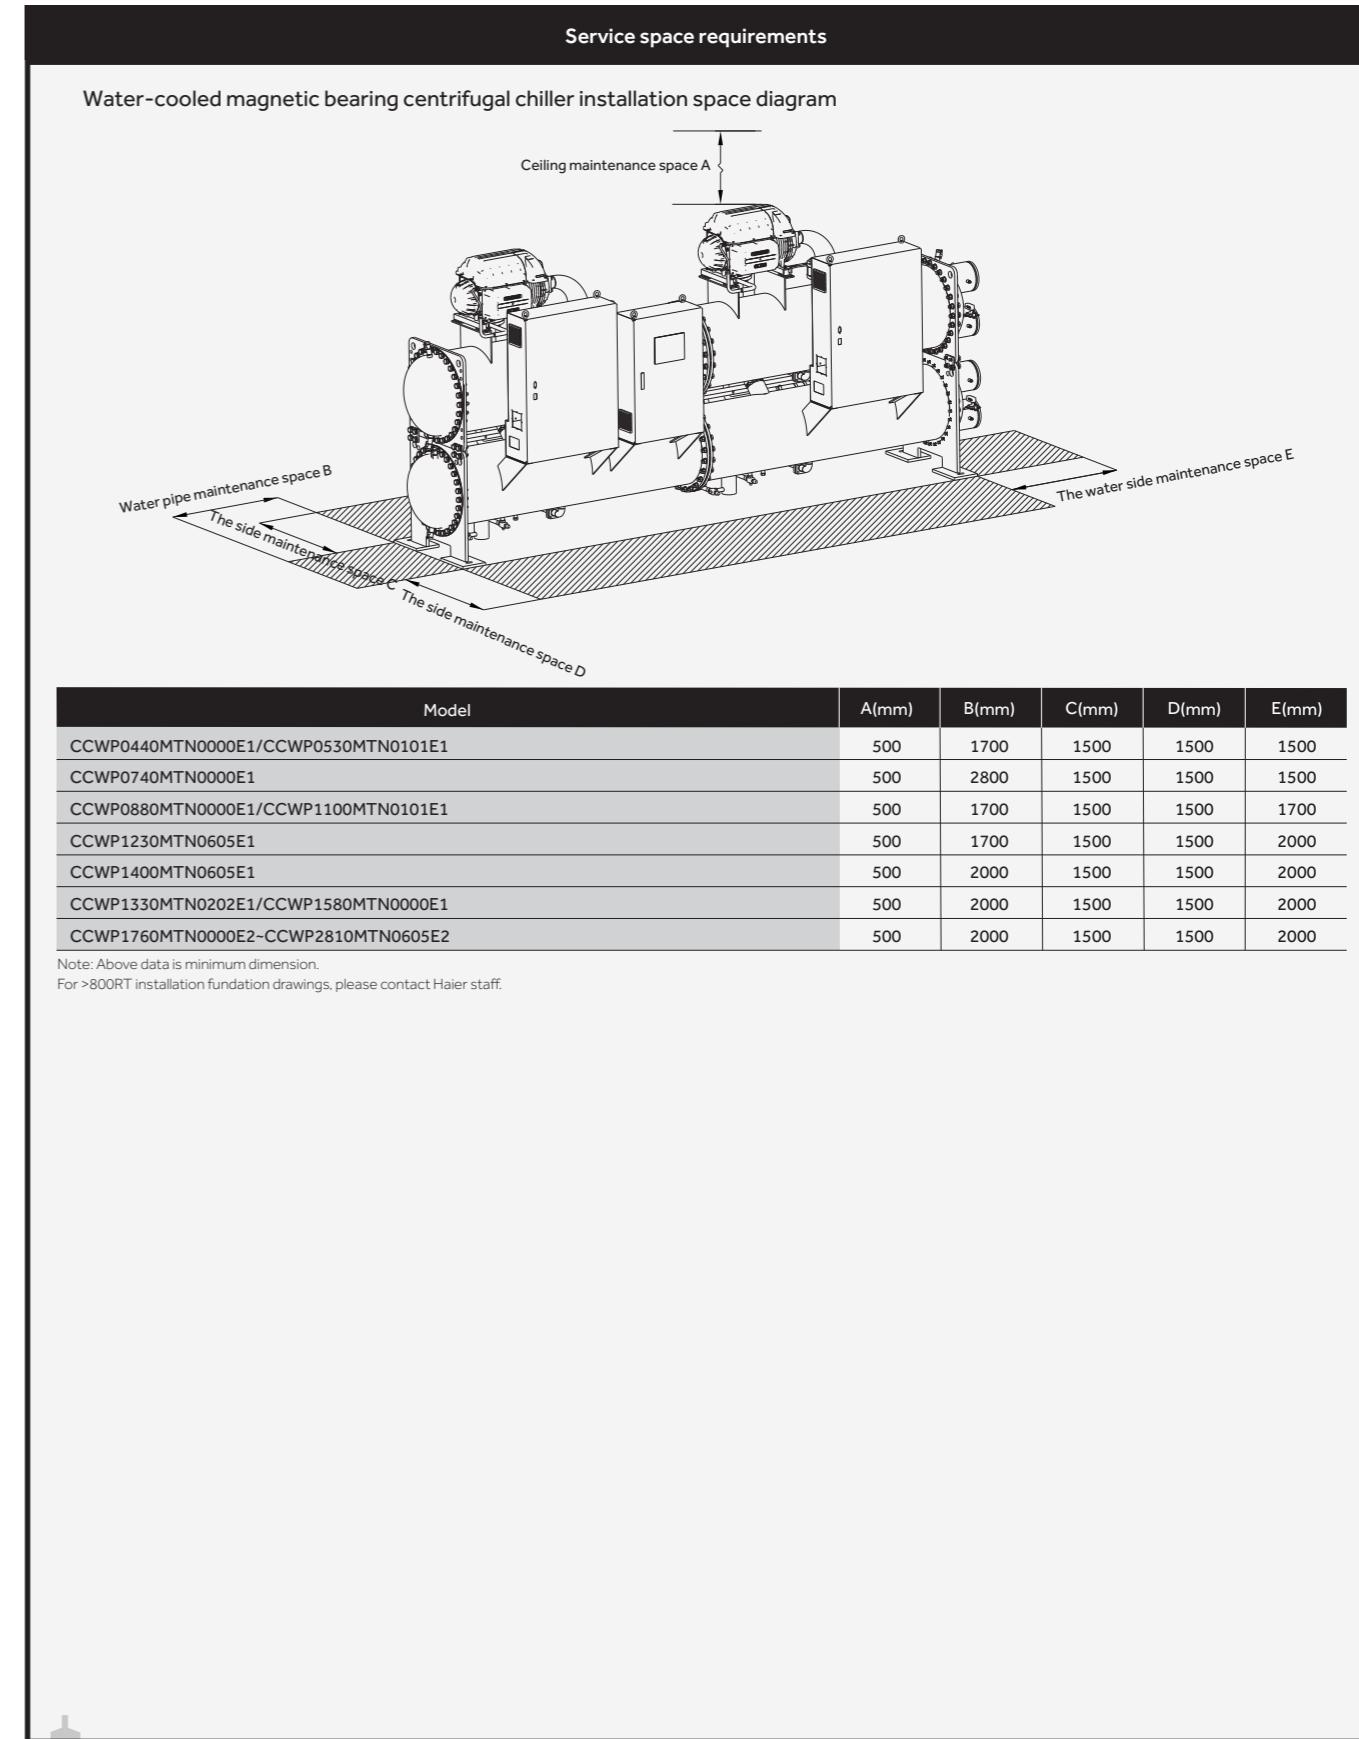

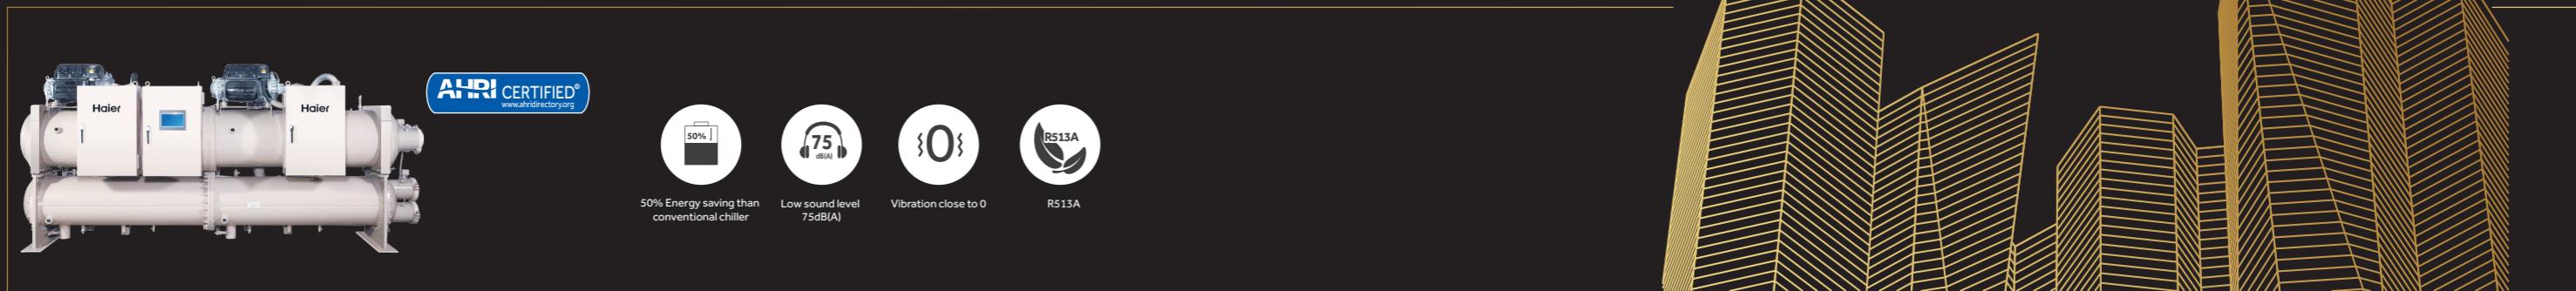
MODEL		CCWU0440 MTN0000E1	CCWU0530 MTN0101E1	CCWU0740 MTN0000E1	CCWU0880 MTN0000E1	CCWU1100 MTN0101E1		CCWU1230 MTN0605E1	CCWU1330 MTN0202E1	CCWU1400 MTN0605E1	CCWU1580 MTN0000E1	CCWU1760 MTN0000E2	CCWU1930 MTN0000E2	CCWU2110 MTN0101E2	CCWU2640 MTN0605E2	CCWU2810 MTN0605E2	
Cooling capacity	Ton	125	150	200	250	300		350	380	400	450	500	550	600	750	800	
	kW	439.6	527.6	703.4	879.2	1055		1231	1336	1407	1583	1758	1934	2110	2638	2814	
Power input	kW	73.13	87.36	117.1	141.6	169.5		197.7	211.5	226.8	250.5	275.4	300.8	329.6	418.9	447.3	
COP	kW/kW	6.01	6.04	6.01	6.21	6.23		6.23	6.32	6.20	6.32	6.39	6.43	6.40	6.30	6.29	
	kW/Ton	0.585	0.582	0.585	0.567	0.565		0.565	0.557	0.567	0.557	0.551	0.547	0.549	0.559	0.559	
Starting amps of single compressor	A	2	2	2	2	2		2	2	2	2	2	2	2	2	2	
Min circuit amps.(Max. running current)	A	178	180	225	178×2	180×2		180+225	178×3	225×2	180×3	178×4	180×4	180×4	180+225×3	225×4	
Max. power input	kW	109	110	138	109×2	110×2		110+138	109×3	138×2	110×3	109×4	110×4	110+138×3	138×4		
Safe protection	/															High/low pressure protection, safety protection, short of water relay protection, anti-freezed protection, motor overload, phase sequence and lack of phase protection	
Compressor	Type	/														Magnetic bearing compressor	
	Starting mode	/														Soft start	
Power supply																3~380V/50Hz	
Refrigerant throttle type																Electronic expansion valves	
Controller type																PLC	
Refrigerant	Type															R513A	
	Charge	kg	160	170	280	320	340		400	540	460	600	760	760	800	860	920
Evaporator	Type															Falling film	
	Chilled water inlet/outlet temp.															12°C/7°C	
	Connection size	DN	150	150	150	200	200		200	200	200	250	250	250	300	300	
	Rated water flow	m³/h	75.6	90.7	121.0	151.2	181.5		211.7	229.8	242.0	272.3	302.4	332.6	362.9	453.7	484.0
	Fouling factor	m²•°C/kW														0.0180	
	Standard pressure	MPa														1.0	
	Pass	/	4	4	2	2	2		2	1*	2	1*	2	2	2	2	
	Water side pressure drop	kPa	73.6	74.2	47.0	68.9	68.9		72.3	39.6	99.0	39.6	63.7	75.5	63.5	79.0	96.0
	Type															Shell & tube heat exchanger	
Condenser	Cooling water inlet/outlet temp.															30°C/35°C	
	Connection size	DN	150	150	150	200	200		200	200	200	250	250	250	300	300	
	Rated water flow	m³/h	88.2	105.8	141.1	175.6	210.6		245.7	266.2	281.0	315.4	349.7	384.4	419.6	525.8	560.9
	Fouling factor	m²•°C/kW														0.0440	
	Standard pressure	MPa														1.0	
	Pass		4	4	2	2	2		2	1*	2	1*	2	2	2	2	
	Water side pressure drop	kPa	67.6	62.5	42.7	64.0	59.4		65.6	37.0	91.3	35.6	57.7	69.2	53.8	70.0	84.8
	Unit length	mm	2250	2250	3250	3830	3830		4150	6400	4450	6400	4800	4800	4800	4800	
	Unit width	mm	1300	1300	1300	1300	1300		1300	1300	1300	1300	2260	2260	2260	2260	
External dimension	Unit height	mm	2260	2260	2260	2260	2260		2260	2260	2260	2260	2260	2260	2260	2260	
	Net weight	kg	2270	2380	2550	3740	4030		4530	5130	4880	5350	8200	8300	8350	9600	9900
	Gross weight	kg	2310	2420	2590	3790	4080		4580	5200	4930	5420	8280	8380	8430	9680	9980
Weight	Operation weight	kg	2520	2680	2900	4170	4500		5130	5880	5530	6100	9200	9400	9450	10700	11000

Note:




1. Specification is based on the following condition:  
Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.0180m²K/kW.  
Condenser cooling water inlet water temperature 30°C, cooling water outlet temperature 35°C, fouling factor=0.0440m²K/kW.
2. Due to decimal point retention restrictions, some data may have slight differences when manually calculated.
3. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.
4. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.
5. Due to our policy of innovation, some specifications maybe changed without notification.
6. \*Can be configured as 2pass, please consult Haier sales staff.

Note: For >800RT performances, please contact Haier staff.

# Dimensions



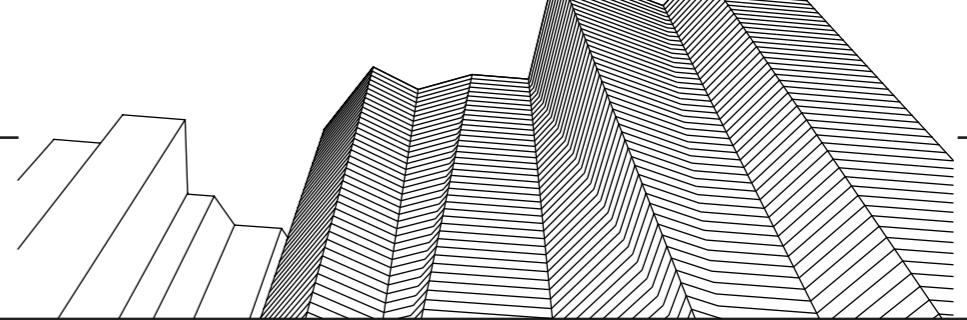


Outline dimension

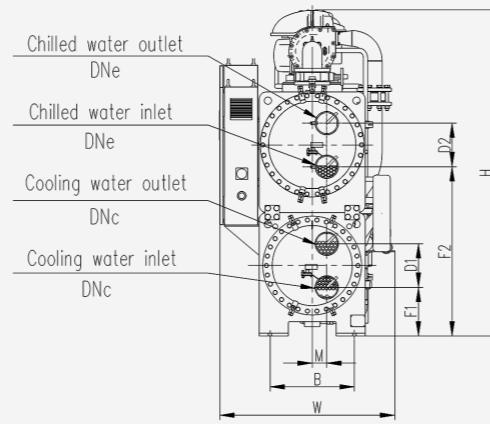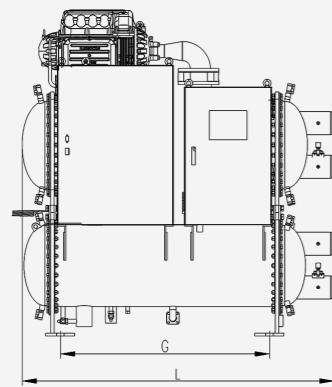

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	M	DNe	DNC
CCWU0440MTN0000E1		2250	1300	2260	580	1440	335	300	1125	300	100	DN150	DN150
CCWU0530MTN0101E1													




\*Please acquire detailed dimensions from Haier technicians.

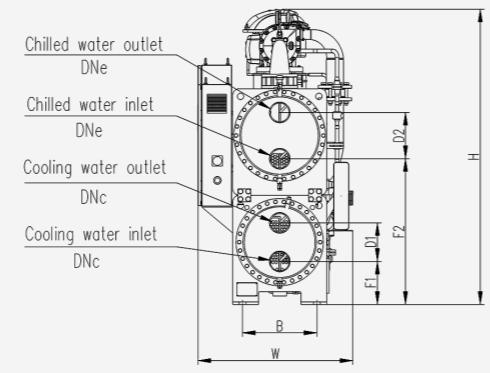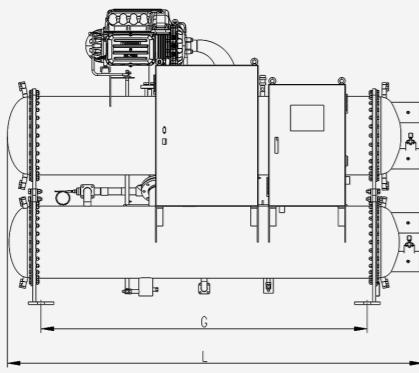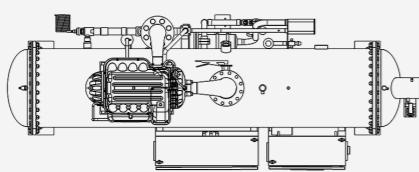

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNC	
CCWU0740MTN0000E1		3250	1300	2260	580	2540	335	300	1095	360	DN150	DN150	




\*Please acquire detailed dimensions from Haier technicians.

Outline dimension

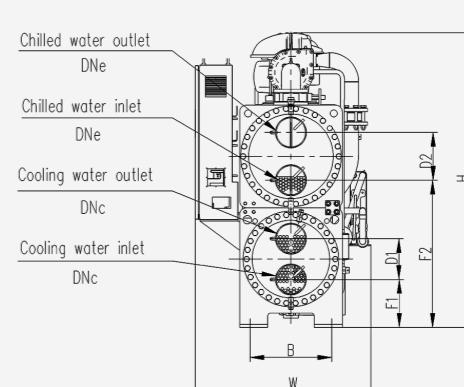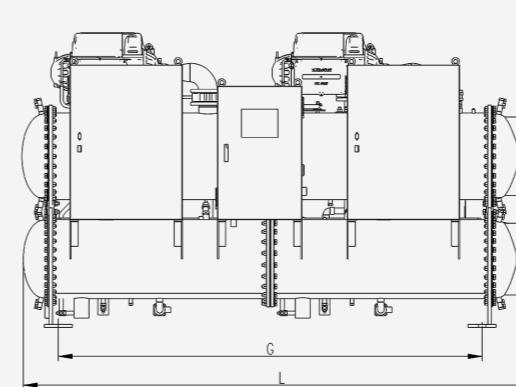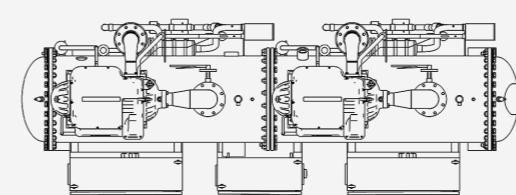

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNC	
CCWU0880MTN0000E1		3830	1300	2260	580	3010	340	290	1105	340	DN200	DN200	
CCWU1100MTN0000E1													


\*Please acquire detailed dimensions from Haier technicians.

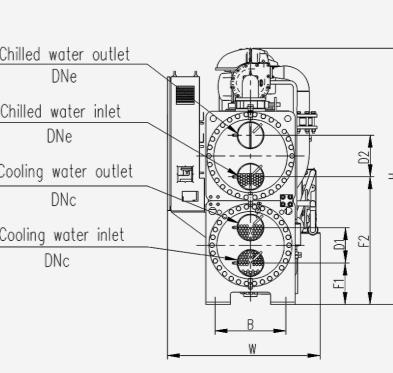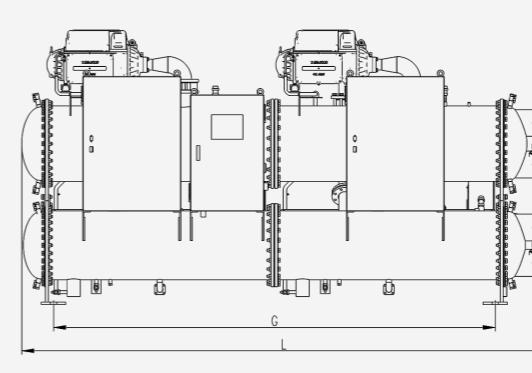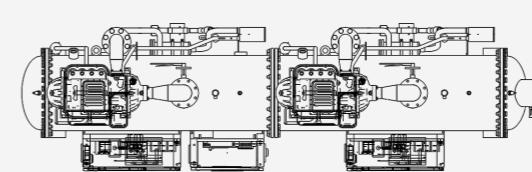


Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNC	
CCWU1230MT0605E1		4150	1300	2260	580	3310	340	290	1105	340	DN200	DN200	
CCWU1400MT0605E1		4450	1300	2260	580	3610	340	290	1105	340	DN200	DN200	

\*Please acquire detailed dimensions from Haier technicians.

# Dimensions


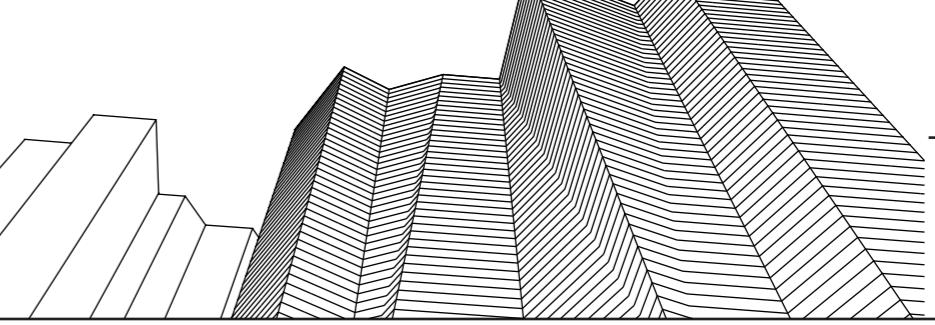


Outline dimension

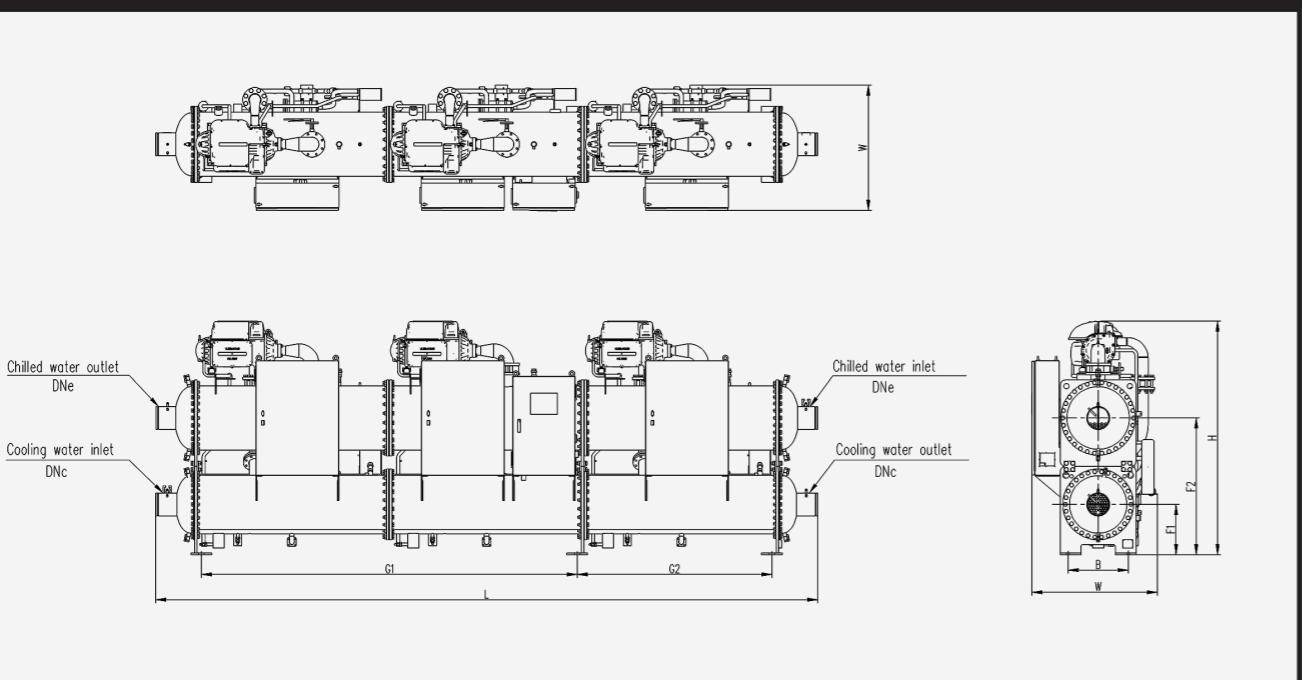

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)			
		L	W	H	B	G1	G2	F1	F2	DNe	DNc
CCWU1330MTN0202E1		6400	1300	2260	580	3610	1870	485	1275	DN200	DN200
CCWU1580MTN0202E1		6400	1300	2260	580	3610	1870	485	1275	DN250	DN250


\*Please acquire detailed dimensions from Haier technicians.

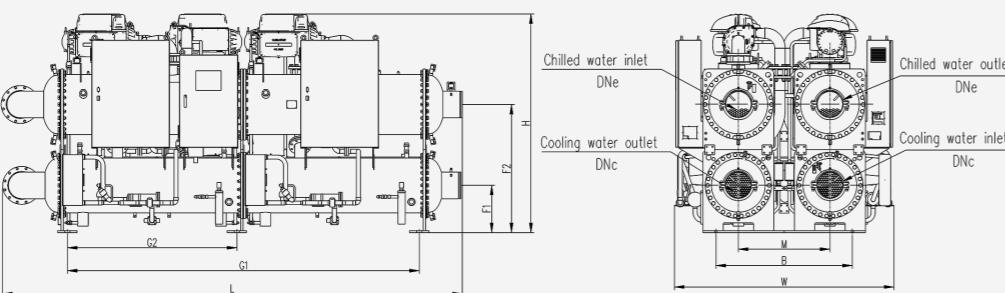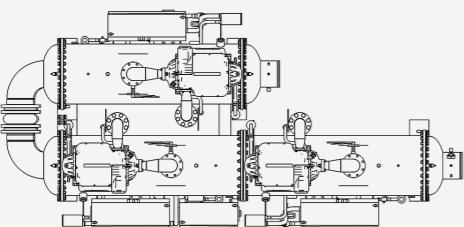

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)				
		L	W	H	B	G1	G2	F1	F2	M	DNe	DNc
CCWU1330MTN0202E2		4800	2260	2260	1520	3610	1740	485	1275	940	DN200	DN200
CCWU1580MTN0000E2		4800	2260	2260	1520	3610	1740	485	1275	940	DN250	DN250

\*Please acquire detailed dimensions from Haier technicians.


Outline dimension

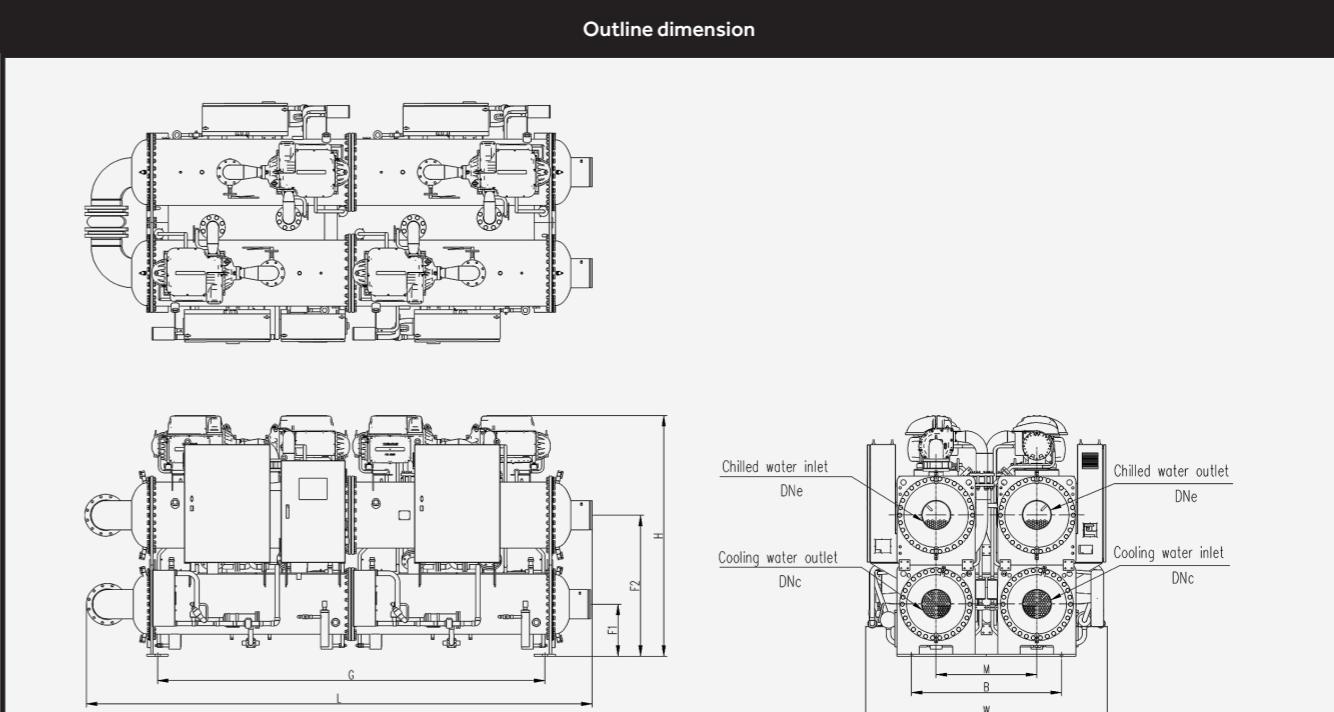

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)				
		L	W	H	B	G	F1	F2	M	DNe	DNc
CCWU1760MTN0000E2		4800	2260	2260	1400	3610	485	1275	940	DN250	DN250
CCWU1930MTN0000E2											
CCWU2110MTN0101E2											
CCWU2640MTN0605E2		4800	2260	2260	1400	3610	485	1275	940	DN300	DN300
CCWU2810MTN0605E2											

\*Please acquire detailed dimensions from Haier technicians.


# Dimensions

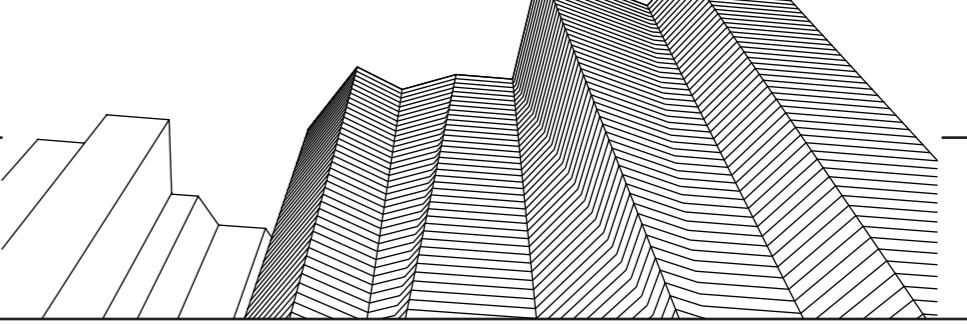

Installation foundation drawing																											
CCWU0440MTNFNCNE1—CCWU1230MTNFNCNE1/CCWU1400MTNFNCNE1																											
			<table border="1"> <thead> <tr> <th>Model</th><th>G(mm)</th><th>B(mm)</th></tr> </thead> <tbody> <tr> <td>CCWU0440MTNFNCNE1</td><td>1440</td><td>580</td></tr> <tr> <td>CCWU0530MTNFNCNE1</td><td>1440</td><td>580</td></tr> <tr> <td>CCWU0740MTNFNCNE1</td><td>2540</td><td>580</td></tr> <tr> <td>CCWU0880MTNFNCNE1</td><td>3010</td><td>580</td></tr> <tr> <td>CCWU1100MTNFNCNE1</td><td>3010</td><td>580</td></tr> <tr> <td>CCWU1230MTNFNCNE1</td><td>3310</td><td>580</td></tr> <tr> <td>CCWU1400MTNFNCNE1</td><td>3610</td><td>580</td></tr> </tbody> </table>	Model	G(mm)	B(mm)	CCWU0440MTNFNCNE1	1440	580	CCWU0530MTNFNCNE1	1440	580	CCWU0740MTNFNCNE1	2540	580	CCWU0880MTNFNCNE1	3010	580	CCWU1100MTNFNCNE1	3010	580	CCWU1230MTNFNCNE1	3310	580	CCWU1400MTNFNCNE1	3610	580
Model	G(mm)	B(mm)																									
CCWU0440MTNFNCNE1	1440	580																									
CCWU0530MTNFNCNE1	1440	580																									
CCWU0740MTNFNCNE1	2540	580																									
CCWU0880MTNFNCNE1	3010	580																									
CCWU1100MTNFNCNE1	3010	580																									
CCWU1230MTNFNCNE1	3310	580																									
CCWU1400MTNFNCNE1	3610	580																									
CCWU1330MTNFNCNE1、CCWU1580MTNFNCNE1																											
			<table border="1"> <thead> <tr> <th>Model</th><th>G1(mm)</th><th>G2(mm)</th><th>B(mm)</th></tr> </thead> <tbody> <tr> <td>CCWU1330MTNFNCNE1</td><td>3610</td><td>1870</td><td>580</td></tr> <tr> <td>CCWU1580MTNFNCNE1</td><td>3610</td><td>1870</td><td>580</td></tr> </tbody> </table>	Model	G1(mm)	G2(mm)	B(mm)	CCWU1330MTNFNCNE1	3610	1870	580	CCWU1580MTNFNCNE1	3610	1870	580												
Model	G1(mm)	G2(mm)	B(mm)																								
CCWU1330MTNFNCNE1	3610	1870	580																								
CCWU1580MTNFNCNE1	3610	1870	580																								
CCWU1330MTNFNCNE1、CCWU1580MTNFNCNE1																											
			<table border="1"> <thead> <tr> <th>Model</th><th>G1(mm)</th><th>G2(mm)</th><th>B(mm)</th></tr> </thead> <tbody> <tr> <td>CCWU1330MTNFNCNE2</td><td>3610</td><td>1740</td><td>1520</td></tr> <tr> <td>CCWU1580MTNFNCNE2</td><td>3610</td><td>1740</td><td>1520</td></tr> </tbody> </table>	Model	G1(mm)	G2(mm)	B(mm)	CCWU1330MTNFNCNE2	3610	1740	1520	CCWU1580MTNFNCNE2	3610	1740	1520												
Model	G1(mm)	G2(mm)	B(mm)																								
CCWU1330MTNFNCNE2	3610	1740	1520																								
CCWU1580MTNFNCNE2	3610	1740	1520																								
CCWU1760MTNFNCNE2-CCWU2810MTNFNCNE2																											
			<table border="1"> <thead> <tr> <th>Model</th><th>G(mm)</th><th>B(mm)</th></tr> </thead> <tbody> <tr> <td>CCWU1760MTNFNCNE2</td><td>3610</td><td>1400</td></tr> <tr> <td>CCWU1930MTNFNCNE2</td><td>3610</td><td>1400</td></tr> <tr> <td>CCWU2110MTNFNCNE2</td><td>3610</td><td>1400</td></tr> <tr> <td>CCWU2640MTNFNCNE2</td><td>3610</td><td>1400</td></tr> <tr> <td>CCWU2810MTNFNCNE2</td><td>3610</td><td>1400</td></tr> </tbody> </table>	Model	G(mm)	B(mm)	CCWU1760MTNFNCNE2	3610	1400	CCWU1930MTNFNCNE2	3610	1400	CCWU2110MTNFNCNE2	3610	1400	CCWU2640MTNFNCNE2	3610	1400	CCWU2810MTNFNCNE2	3610	1400						
Model	G(mm)	B(mm)																									
CCWU1760MTNFNCNE2	3610	1400																									
CCWU1930MTNFNCNE2	3610	1400																									
CCWU2110MTNFNCNE2	3610	1400																									
CCWU2640MTNFNCNE2	3610	1400																									
CCWU2810MTNFNCNE2	3610	1400																									

Service space requirements					
Water-cooled magnetic bearing centrifugal chiller installation space diagram					
Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
CCWU0440MTNFNCNE1/CCWU0530MTNFNCNE1	500	1700	1500	1500	1500
CCWU0740MTNFNCNE1	500	2800	1500	1500	1500
CCWU0880MTNFNCNE1/CCWU1100MTNFNCNE1	500	1700	1500	1500	1700
CCWU1230MTNFNCNE1	500	1700	1500	1500	2000
CCWU1400MTNFNCNE1	500	2000	1500	1500	2000
CCWU1330MTNFNCNE1/CCWU1580MTNFNCNE1	500	2000	1500	1500	2000
CCWU1760MTNFNCNE2-CCWU2810MTNFNCNE2	500	2000	1500	1500	2000

Note: Above data is minimum dimension

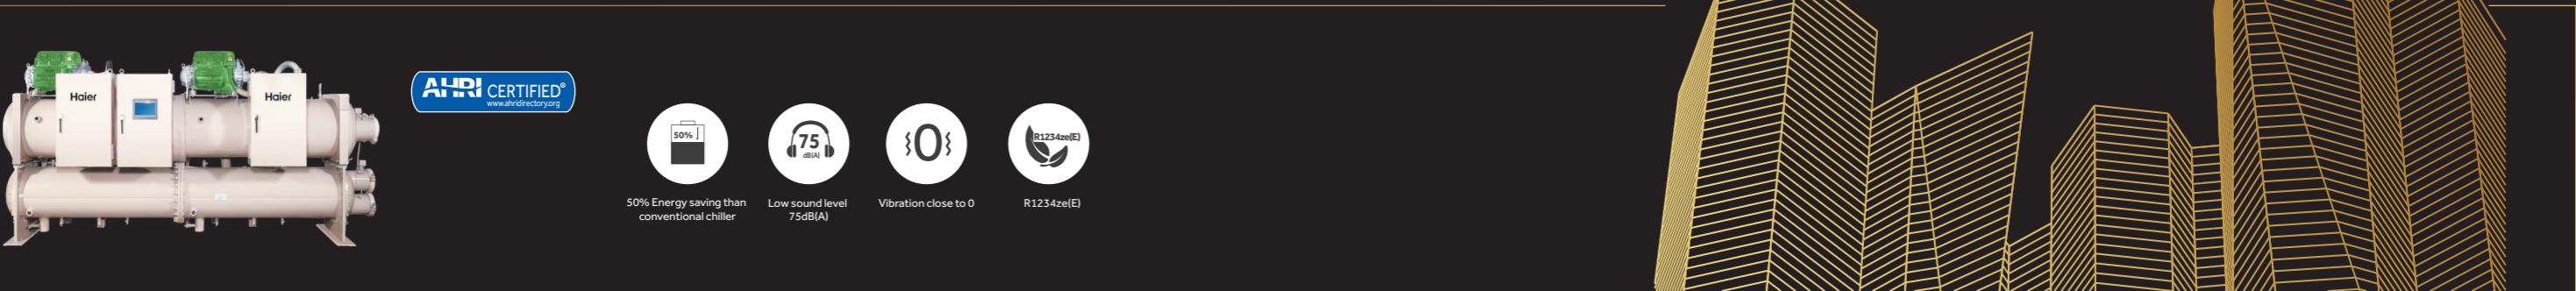


MODEL		CCWR0340 MGNFNCNE1	CCWR0390 MGNFNCNE1	CCWR0460 MGNFNCNE1	CCWR0670 MGNFNCNE1	CCWR0780 MGNFNCNE1		CCWR0850 MGNFNCNE1	CCWR0920 MGNFNCNE1	CCWR1000 MGNFNCNE1	CCWR1160 MGNFNCNE1	CCWR1230 MGNFNCNE1	CCWR1370 MGNFNCNE1	CCWR1550 MGNFNCNE2	CCWR1690 MGNFNCNE2	CCWR1830 MGNFNCNE2	
Cooling capacity	Ton	95	110	130	190	220		240	260	285	330	350	390	440	480	520	
	kW	334.1	386.9	457.2	668.2	773.7		844.1	914.4	1002	1161	1231	1372	1547	1688	1829	
Power input	kW	57.73	66.23	79.48	114.6	131.7		146.0	159.3	169.3	189.6	201.2	223.6	248.9	273.6	293.9	
COP	kW/kW	5.79	5.84	5.75	5.83	5.87		5.78	5.74	5.92	6.12	6.13	6.22	6.17	6.22		
	kW/Ton	0.608	0.602	0.611	0.603	0.599		0.608	0.613	0.594	0.575	0.575	0.566	0.570	0.565		
Starting amps of single compressor	A	2	2	2	2	2		2	2	2	2	2	2	2	2	2	
Min circuit amps.(Max. running current)	A	150	123	210	150×2	123×2		123+210	210×2	150×3	123×3	123×2+210	210×3	123×4	123×2+210×2	210×4	
Max. power input	kW	92	75	129	92×2	75×2		75+129	129×2	92×3	75×3	75×2+129	129×3	75×4	75×2+129×2	129×4	
Safe protection	/																
Compressor	Type	/														Magnetic bearing compressor	
	starting mode	/														Soft start	
Power supply																3~380V/50Hz	
Refrigerant throttle type																Electronic expansion valves	
Controller type																PLC	
Refrigerant	Type															R1234ze(E)	
	Charge	kg	160	170	230	320	340		400	460	540	600	630	690	800	860	920
Evaporator	Type															Falling film	
	Chilled water inlet/outlet temp.															12/7°C	
	Connection Size	DN	125	125	150	150	150		200	200	200	200	200	200	250	250	
	Rated water flow	m³/h	57.5	66.5	78.6	114.9	133.1		145.2	157.3	172.4	199.6	211.7	235.9	266.2	290.4	314.6
	Fouling factor	m² • °C/kW														0.0180	
	Standard pressure	MPa														1.0	
	Pass	/	4	4	4	2	2		2	2	1*	1*	1*	1*	2	2	
	Water side pressure drop	kPa	70.0	75.0	68.0	70.0	75.0		75.0	68.0	50.0	50.0	55.0	55.0	65.0	66.0	
Condenser	Type															Shell&tube heat exchanger	
	Cooling water inlet/outlet temp.															30/35°C	
	Connection size	DN	125	125	150	150	150		200	200	200	200	200	200	250	250	
	Rated water flow	m³/h	67.4	77.9	92.3	134.6	155.7		170.3	184.7	201.5	232.2	246.3	274.4	309.0	337.4	365.0
	Fouling factor	m² • °C/kW														0.0440	
	Standard pressure	MPa														1.0	
	Pass		4	4	4	2	2		2	2	1*	1*	1*	1*	2	2	
	Water side pressure drop	kPa	75.0	78.0	70.0	75.0	78.0		77.0	70.0	53.0	53.0	55.0	54.9	68.0	69.9	67.9
External dimension	Unit length	mm	2250	2250	2510	3830	3830		4150	4450	6400	6400	6400	6400	4800	4800	4800
	Unit width	mm	1300	1300	1300	1300	1300		1300	1300	1300	1300	1300	1300	2260	2260	2260
	Unit height	mm	2260	2260	2260	2260	2260		2260	2260	2260	2260	2260	2260	2260	2260	2260
Weight	Net weight	kg	2220	2330	2400	3790	3890		3990	4180	5130	5430	5880	6160	8000	8100	8200
	Gross weight	kg	2260	2370	2440	3840	3940		4040	4230	5200	5500	5950	6230	8080	8180	8280
	Operation weight	kg	2520	2680	2750	4290	4390		4490	4730	5880	6200	6660	6960	9000	9150	9300




Note:

1. Specification is based on the following condition:  
Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.0180m²K/kW.  
Condenser cooling water inlet/outlet temperature 30°C, cooling water outlet temperature 35°C, fouling factor=0.0440m²K/kW.
2. Due to decimal point retention restrictions, some data may have slight differences when manually calculated.
3. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.
4. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.
5. Due to our policy of innovation, some specifications maybe changed without notification.
6. \*Can be configured as 2pass, please consult Haier sales staff.

# Dimensions



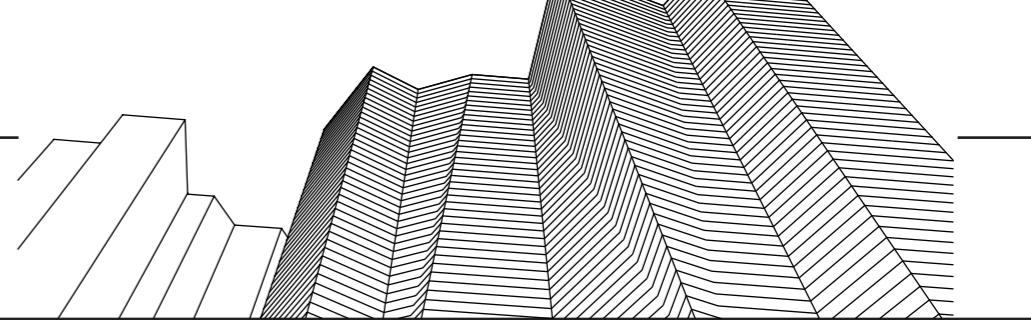


Outline dimension

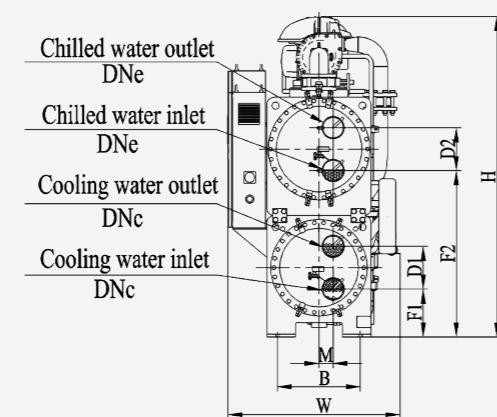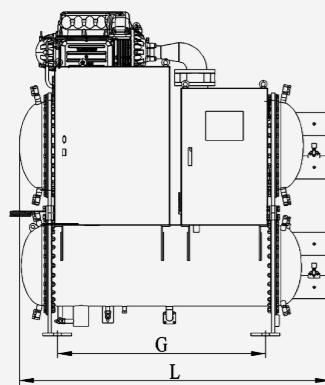

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)						
		L	W	H	B	G	F1	D1	F2	D2	M	DNe	DNC
CCWR0340MGNFNCNE1		2250	1300	2260	580	1440	335	300	1125	300	100	DN150	DN150
CCWR0390MGNFNCNE1		2510	1300	2260	580	1440	335	300	1125	300	100	DN200	DN200




\*Please acquire detailed dimensions from Haier technicians.

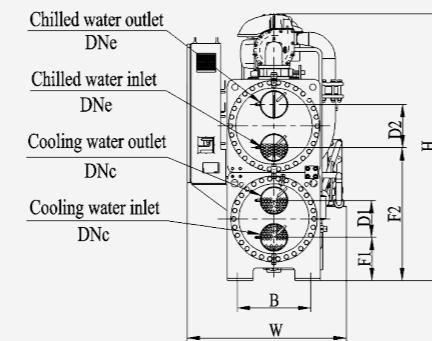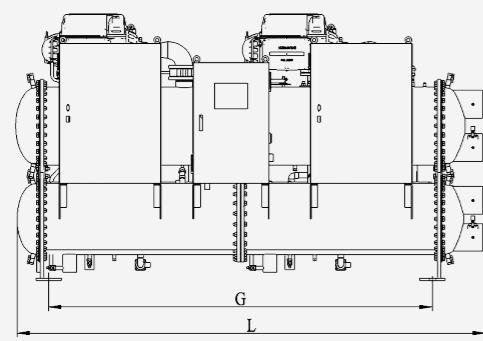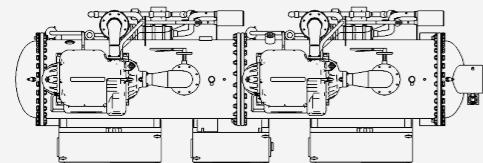

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)						
		L	W	H	B	G	F1	D1	F2	D2	M	DNe	DNC
CCWR0670MGNFNCNE1		3830	1300	2260	580	3010	340	290	1105	340	DN150	DN150	
CCWR0780MGNFNCNE1													




\*Please acquire detailed dimensions from Haier technicians.

Outline dimension

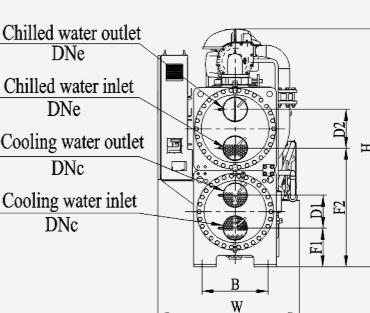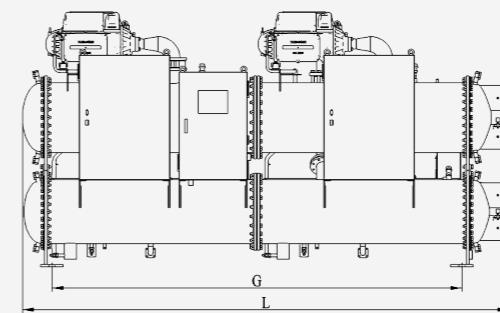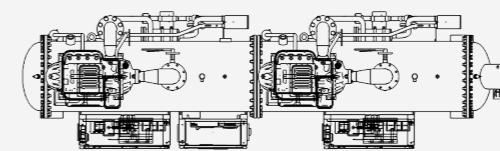

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	M	DNe
CCWR1000MGNFNCNE1		4150	1300	2260	580	3310	340	290	1105	340	DN200	DN200
CCWR1160MGNFNCNE1		4450	1300	2260	580	3310	340	290	1105	340	DN200	DN200

\*Please acquire detailed dimensions from Haier technicians.

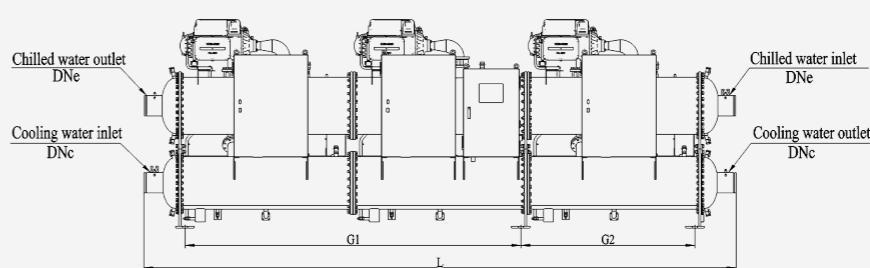
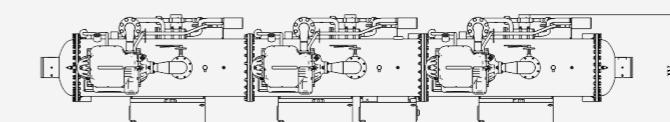


Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)						
		L	W	H	B	G1	G2	F1	F2	DNe	DNC		
CCWR1230MGNFNCNE1		6400	1300	2260	580	3610	1870	485	1275	DN200	DN200		
CCWR1370MGNFNCNE1													

\*Please acquire detailed dimensions from Haier technicians.



# Dimensions

Outline dimension

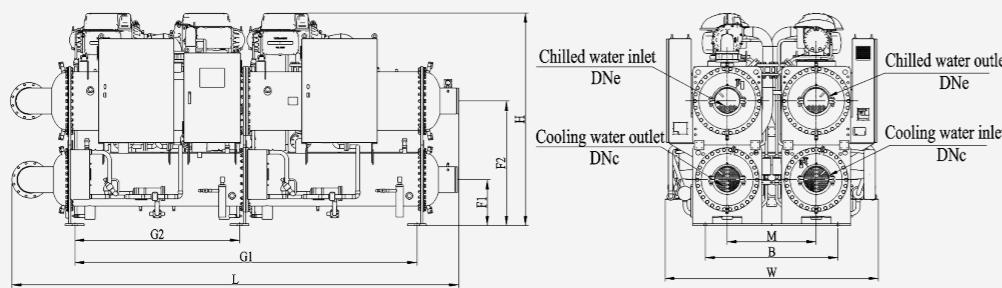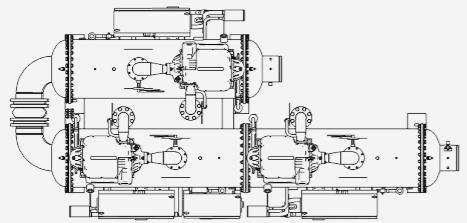

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)				
		L	W	H	B	G1	G2	F1	F2	M	DNe	DNC
CCWR1000MGNFNCNE2		4800	2260	2260	1520	3610	1740	485	1275	940	DN200	DN200
CCWR1160MGNFNCNE2												
CCWR1230MGNFNCNE2												
CCWR1370MGNFNCNE2												

\*Please acquire detailed dimensions from Haier technicians.

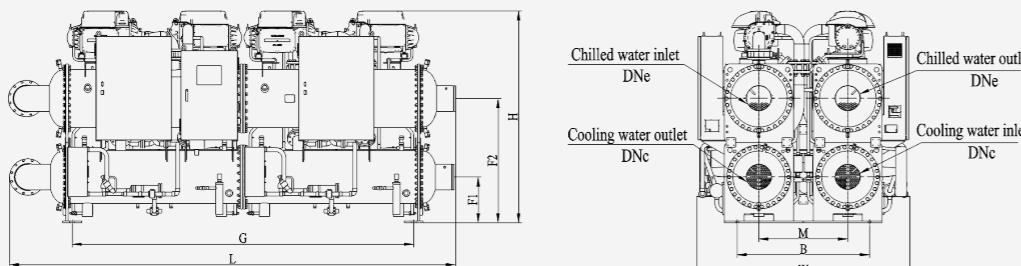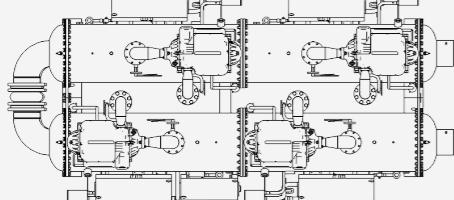


Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)			
		L	W	H	B	G	F1	F2	M	DNe	DNC
CCWR1550MGNFNCNE2		4800	2260	2260	1400	3610	485	1275	940	DN250	DN250
CCWR1690MGNFNCNE2											
CCWR1830MGNFNCNE2											

\*Please acquire detailed dimensions from Haier technicians.


Installation foundation drawing

CCWR0340MGNFNCNE1~  
CCWR0920MGNFNCNE1




Model	G(mm)	B(mm)
CCWR0340MGNFNCNE1	1440	580
CCWR0390MGNFNCNE1	1440	580
CCWR0460MGNFNCNE1	1740	580
CCWR0670MGNFNCNE1	3010	580
CCWR0780MGNFNCNE1	3010	580
CCWR0850MGNFNCNE1	3310	580
CCWR0920MGNFNCNE1	3610	580

CCWR1000MGNFNCNE2~  
CCWR1370MGNFNCNE2 (U type)




Model	G1(mm)	G2(mm)	B(mm)
CCWR1000MGNFNCNE2	3610	1740	1520
CCWR1160MGNFNCNE2	3610	1740	1520
CCWR1230MGNFNCNE2	3610	1740	1520
CCWR1370MGNFNCNE2	3610	1740	1520

CCWR1000MGNFNCNE1~  
CCWR1370MGNFNCNE1 (Line type)

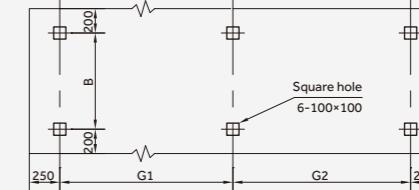

Model	G1(mm)	G2(mm)	B(mm)
CCWR1000MGNFNCNE1	3610	1870	580
CCWR1160MGNFNCNE1	3610	1870	580
CCWR1230MGNFNCNE1	3610	1870	580
CCWR1370MGNFNCNE1	3610	1870	580


CCWR1550MGNFNCNE2~  
CCWR1830MGNFNCNE2



Model	G(mm)	B(mm)
CCWR1550MGNFNCNE2	3610	1400
CCWR1690MGNFNCNE2	3610	1400
CCWR1830MGNFNCNE2	3610	1400


Service space requirements

Water-cooled magnetic bearing centrifugal chiller installation space diagram

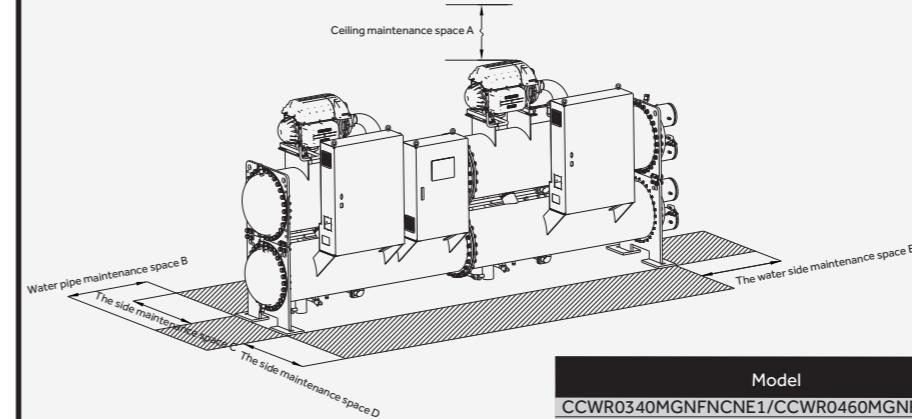

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
CCWR0340MGNFNCNE1/CCWR0460MGNFNCNE1	500	1700	1500	1500	1500
CCWR0460MGNFNCNE1	500	2000	1500	1500	1500
CCWR0670MGNFNCNE1/CCWR0780MGNFNCNE1	500	1700	1500	1500	1700
CCWR0850MGNFNCNE1	500	1700	1500	1500	2000
CCWR0920MGNFNCNE1	500	2000	1500	1500	2000
CCWR1000MGNFNCNE1-CCWR1370MGNFNCNE1	500	2000	1500	1500	2000
CCWR1550MGNFNCNE1-CCWR1830MGNFNCNE1	500	2000	1500	1500	2000

Note: Above data is minimum dimension

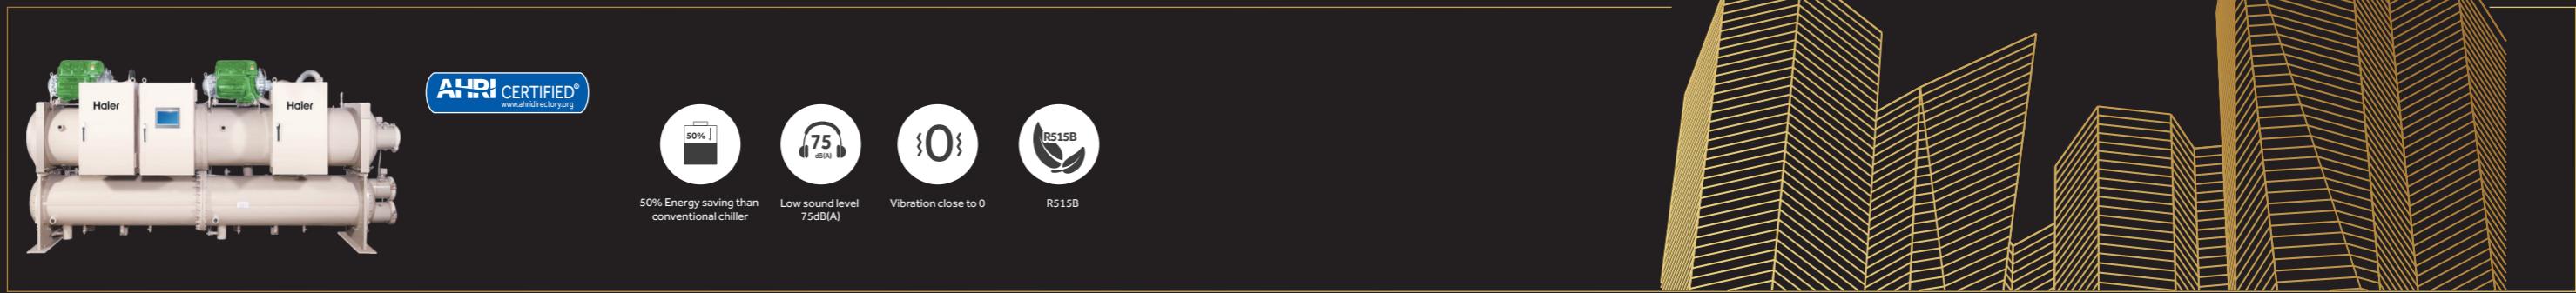


MODEL		CCWV0340 MGNFNCNE1	CCWV0390 MGNFNCNE1	CCWV0460 MGNFNCNE1	CCWV0670 MGNFNCNE1	CCWV0780 MGNFNCNE1		CCWV0850 MGNFNCNE1	CCWV0920 MGNFNCNE1	CCWV1000 MGNFNCNE1	CCWV1160 MGNFNCNE1	CCWV1230 MGNFNCNE1	CCWV1370 MGNFNCNE1	CCWV1550 MGNFNCNE2	CCWV1690 MGNFNCNE2	CCWV1830 MGNFNCNE2	
Cooling capacity	Ton	95	110	130	190	220		240	260	285	330	350	390	440	480	520	
	kW	334.1	386.9	457.2	668.2	773.7		844.1	914.4	1002	1161	1231	1372	1547	1688	1829	
Power input	kW	57.73	66.23	79.48	114.6	131.7		146.0	159.3	169.3	189.6	201.2	223.6	248.9	273.6	293.9	
COP	kW/kW	5.79	5.84	5.75	5.83	5.87		5.78	5.74	5.92	6.12	6.12	6.13	6.22	6.17	6.22	
	kW/Ton	0.608	0.602	0.611	0.603	0.599		0.608	0.613	0.594	0.575	0.575	0.573	0.566	0.570	0.565	
Starting amps of single compressor	A	2	2	2	2	2		2	2	2	2	2	2	2	2	2	
Min circuit amps.(Max. running current)	A	150	123	210	150×2	123×2		123+210	210×2	150×3	123×3	123×2+210	210×3	123×4	123×2+210×2	210×4	
Max. power input	kW	92	75	129	92×2	75×2		75+129	129×2	92×3	75×3	75×2+129	129×3	75×4	75×2+129×2	129×4	
Safe protection	/																
Compressor	Type	/														Magnetic bearing compressor	
	starting mode	/														Soft start	
Power supply																3~380V/50Hz	
Refrigerant throttle type																Electronic expansion valve	
Controller type																PLC	
Refrigerant	Type															R515B	
	Charge	kg	160	170	230	320	340		400	460	540	600	630	690	800	860	920
Evaporator	Type															Falling film	
	Chilled water inlet/outlet temp.															12/7°C	
	Connection Size	DN	125	125	150	150	150		200	200	200	200	200	200	250	250	250
	Rated water flow	m³/h	57.5	66.5	78.6	114.9	133.1		145.2	157.3	172.4	199.6	211.7	235.9	266.2	290.4	314.6
	Fouling factor	m²•°C/kW														0.0180	
	Standard pressure	MPa														1.0	
	Pass	/	4	4	4	2	2		2	2	1*	1*	1*	1*	2	2	2
	Water side pressure drop	kPa	70.0	75.0	68.0	70.0	75.0		75.0	68.0	50.0	50.0	55.0	55.0	65.0	65.0	66.0
	Type															Shell&tube heat exchanger	
Condenser	Cooling water inlet/outlet temp.															30/35°C	
	Connection size	DN	125	125	150	150	150		200	200	200	200	200	200	250	250	250
	Rated water flow	m³/h	67.4	77.9	92.3	134.6	155.7		170.3	184.7	201.5	232.2	246.3	274.4	309.0	337.4	365.0
	Fouling factor	m²•°C/kW														0.0440	
	Standard pressure	MPa														1.0	
	Pass	/	4	4	4	2	2		2	2	1*	1*	1*	1*	2	2	2
	Water side pressure drop	kPa	75.0	78.0	70.0	75.0	78.0		77.0	70.0	53.0	53.0	55.0	54.9	68.0	69.9	67.9
	Unit length	mm	2250	2250	2510	3830	3830		4150	4450	6400	6400	6400	6400	4800	4800	4800
	Unit width	mm	1300	1300	1300	1300	1300		1300	1300	1300	1300	1300	1300	2260	2260	2260
External dimension	Unit height	mm	2260	2260	2260	2260	2260		2260	2260	2260	2260	2260	2260	2260	2260	2260
	Net weight	kg	2220	2330	2400	3790	3890		3990	4180	5130	5430	5880	6160	8000	8100	8200
	Gross weight	kg	2260	2370	2440	3840	3940		4040	4230	5200	5500	5950	6230	8080	8180	8280
Weight	Operation weight	kg	2520	2680	2750	4290	4390		4490	4730	5880	6200	6660	6960	9000	9150	9300




Note:

1. Specification is based on the following condition:  
Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.0180m²K/kW.  
Condenser cooling water inlet water temperature 30°C, cooling water outlet temperature 35°C, fouling factor=0.0440m²K/kW.
2. Due to decimal point retention restrictions, some data may have slight differences when manually calculated.
3. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.
4. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.
5. Due to our policy of innovation, some specifications maybe changed without notification.
6. \*Can be configured as 2pass, please consult Haier sales staff.

# Dimensions



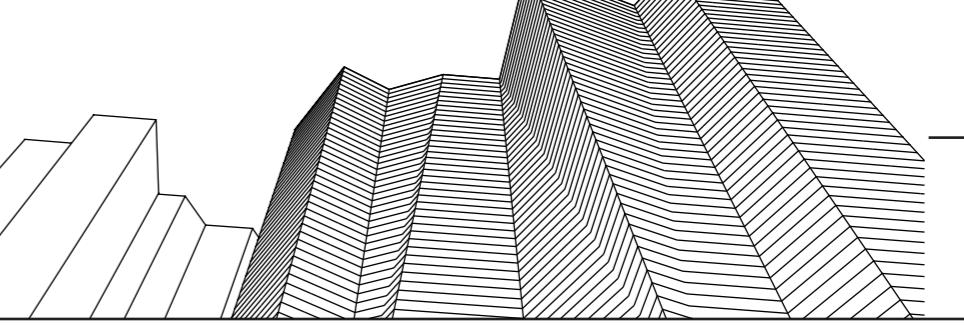


Outline dimension

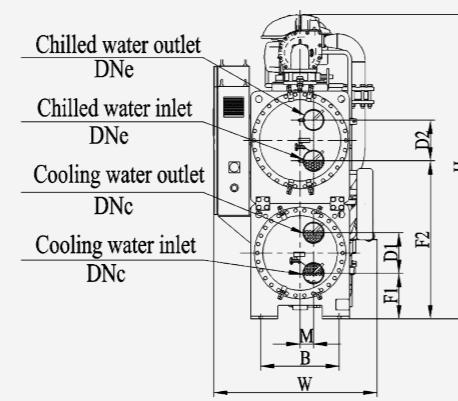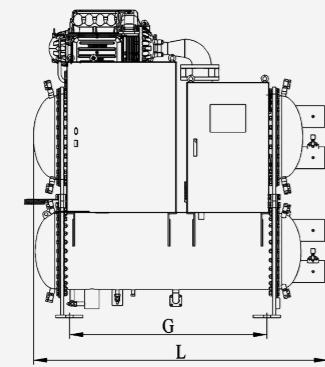

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	M	DNe	DNC
CCWV0340MGNFNCNE1		2250	1300	2260	580	1440	335	300	1125	300	100	DN150	DN150
CCWV0390MGNFNCNE1		2510	1300	2260	580	1740	335	300	1125	300	100	DN200	DN200




\*Please acquire detailed dimensions from Haier technicians.

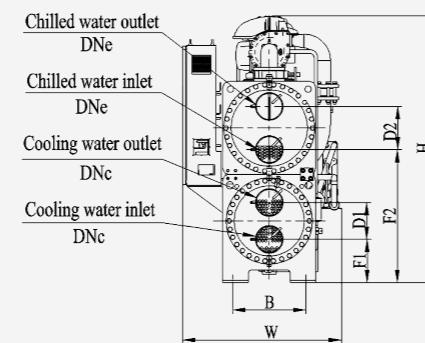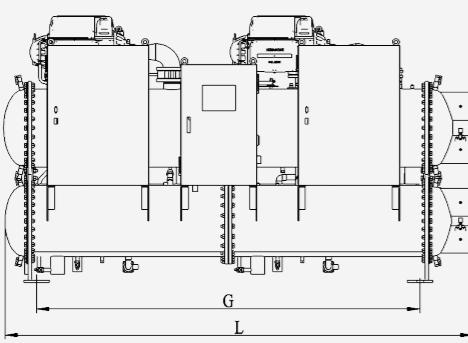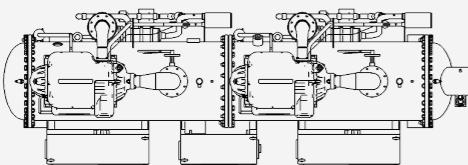

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNC	
CCWV0670MGNFNCNE1		3830	1300	2260	580	3010	340	290	1105	340	DN150	DN150	
CCWV0780MGNFNCNE1													




\*Please acquire detailed dimensions from Haier technicians.

Outline dimension

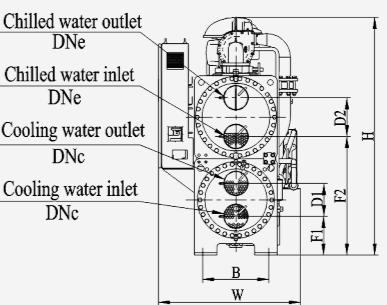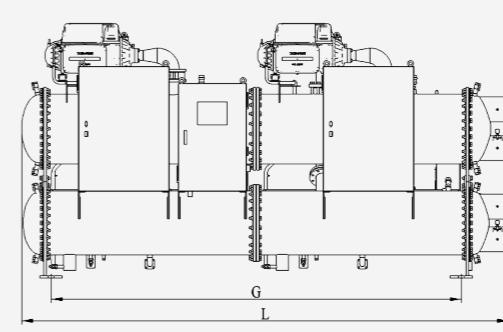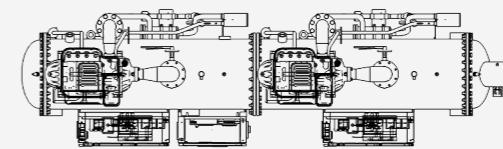

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	F1	D1	F2	D2	DNe	DNC	
CCWV0850MGNFNCNE1		4150	1300	2260	580	3310	340	290	1105	340	DN200	DN200	
CCWV0920MGNFNCNE1		4450	1300	2260	580	3310	340	290	1105	340	DN200	DN200	


\*Please acquire detailed dimensions from Haier technicians.

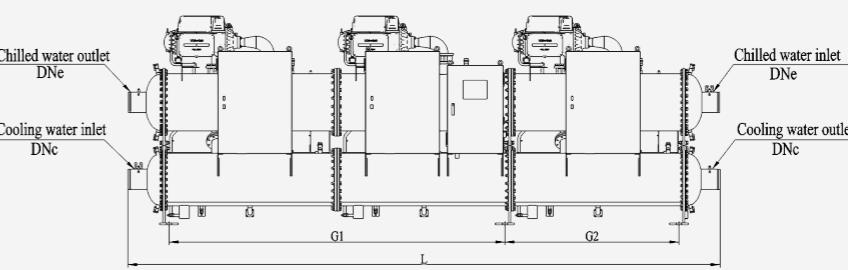


Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G1	G2	F1	F2	DNe	DNC		
CCWV1000MGNFNCNE1													
CCWV1160MGNFNCNE1													
CCWV1230MGNFNCNE1													
CCWV1370MGNFNCNE1													
		6400	1300	2260	580	3610	1870	485	1275	DN200	DN200		

\*Please acquire detailed dimensions from Haier technicians.

# Dimensions


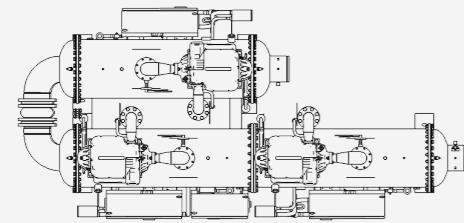


Outline dimension

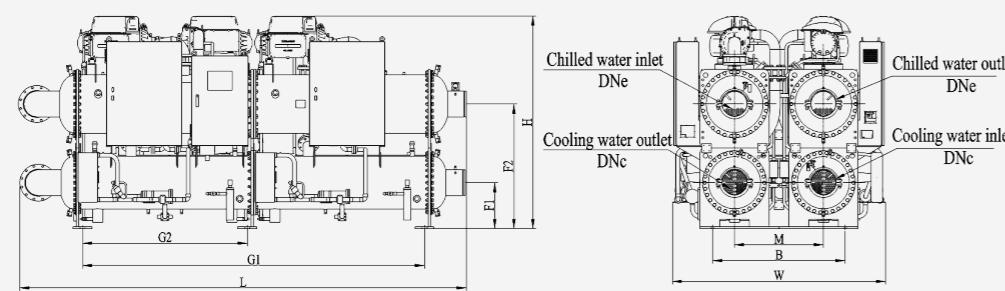

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)				
		L	W	H	B	G1	G2	F1	F2	M	DNe	DNC
CCWV1000MGNFNCNE2												
CCWV1160MGNFNCNE2		4800	2260	2260	1520	3610	1740	485	1275	940	DN200	DN200
CCWV1230MGNFNCNE2												
CCWV1370MGNFNCNE2												

\*Please acquire detailed dimensions from Haier technicians.

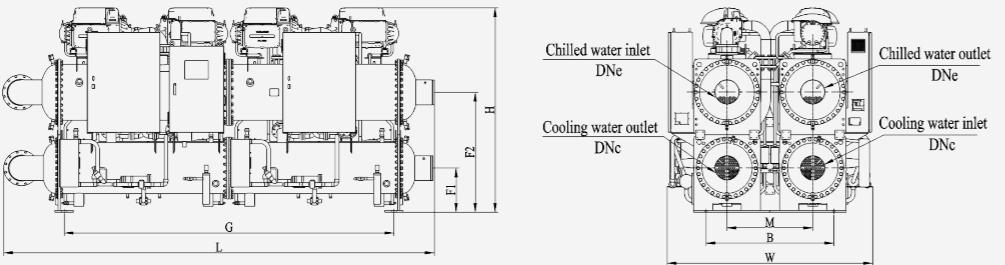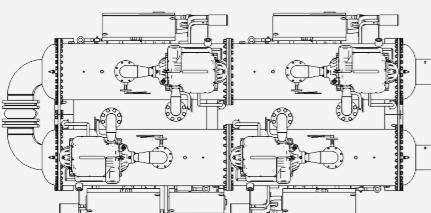


Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)			
		L	W	H	B	G	F1	F2	M	DNe	DNC
CCWV1550MGNFNCNE2											
CCWV1690MGNFNCNE2		4800	2260	2260	1400	3610	485	1275	940	DN250	DN250
CCWV1830MGNFNCNE2											

\*Please acquire detailed dimensions from Haier technicians.


Installation foundation drawing

CCWV0340MGNFNCNE1~  
CCWV0920MGNFNCNE1




Model	G(mm)	B(mm)
CCWV0340MGNFNCNE1	1440	580
CCWV0390MGNFNCNE1	1440	580
CCWV0460MGNFNCNE1	1740	580
CCWV0670MGNFNCNE1	3010	580
CCWV0780MGNFNCNE1	3010	580
CCWV0850MGNFNCNE1	3310	580
CCWV0920MGNFNCNE1	3610	580

CCWV1000MGNFNCNE1~  
CCWV1370MGNFNCNE (Line type)

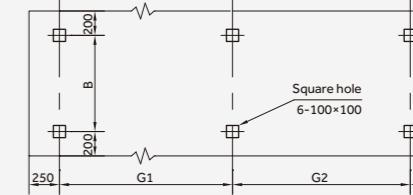


Model	G1(mm)	G2(mm)	B(mm)
CCWV1000MGNFNCNE1	3610	1870	580
CCWV1160MGNFNCNE1	3610	1870	580
CCWV1230MGNFNCNE1	3610	1870	580
CCWV1370MGNFNCNE1	3610	1870	580

CCWV1000MGNFNCNE2 ~  
CCWV1370MGNFNCNE2 (U type)



CCWV1550MGNFNCNE2 ~  
CCWV1830MGNFNCNE2




Model	G1(mm)	G2(mm)	B(mm)
CCWV1000MGNFNCNE2	3610	1740	1520
CCWV1160MGNFNCNE2	3610	1740	1520
CCWV1230MGNFNCNE2	3610	1740	1520
CCWV1370MGNFNCNE2	3610	1740	1520

Model	G(mm)	B(mm)
CCWV1550MGNFNCNE2	3610	1400
CCWV1690MGNFNCNE2	3610	1400
CCWV1830MGNFNCNE2	3610	1400

Service space requirements

Water-cooled magnetic bearing centrifugal chiller installation space diagram

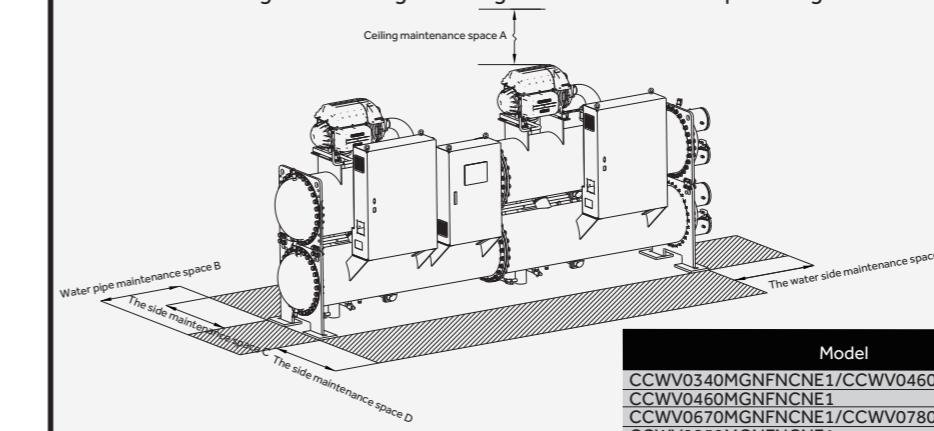

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
CCWV0340MGNFNCNE1/CCWV0460MGNFNCNE1	500	1700	1500	1500	1500
CCWV0460MGNFNCNE1	500	2000	1500	1500	1500
CCWV0670MGNFNCNE1/CCWV0780MGNFNCNE1	500	1700	1500	1500	1700
CCWV0850MGNFNCNE1	500	1700	1500	1500	2000
CCWV0920MGNFNCNE1	500	2000	1500	1500	2000
CCWV1000MGNFNCNE1-CCWV1370MGNFNCNE1	500	2000	1500	1500	2000
CCWV1550MGNFNCNE1-CCWV1830MGNFNCNE1	500	2000	1500	1500	2000

Note: Above data is minimum dimension

# Modular Water-cooled Magnetic Bearing Centrifugal Chiller



## Nomenclature

<b>C C W P 0315 T T N EA CA N 1</b>	
Chiller	
Magnetic bearing centrifugal chiller	
Cooling type: W-Water-cooled	
Refrigerant: P-R134a; U-R513A; R-R1234ze(E)	
Cooling capacity, kW	
Structure: M-Multi circuit; S-Single circuit; T-Modular type chiller	
Compressor type: T-TT; X-VTX	
Design serial number: 1-'Line' type 2-'U' type	
Economizer: E-With; N-Without	
Condenser type	
Evaporator type: E-Flooded; F-Falling film	
Type: A, B....	
Power supply: N-3Ph/380V/50Hz; K-3Ph/460V/60Hz; B-3Ph/400V/50Hz; L-3Ph/380V/60Hz;	

## Convenient

### Replacement solution

For renovation project, conventional solution will spend a lot of time and cost to replace the units.

#### ① Dismantling walls


Spend a lot of time; Affect the normal operation of buildings; Costs caused by the use of large equipment.



#### Conventional Solution

#### ② Disassembling the unit

Spend a lot of time; low reliability.

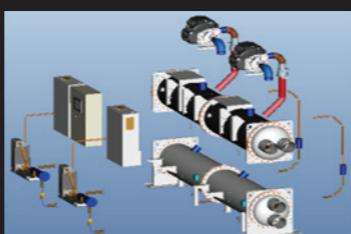


## Small footprint, easy to transport

The modular magnetic bearing centrifugal chiller is very compact, which can save 45% installation space than conventional chiller, and it is easily transported by the elevator.



The crane and other large-scale equipment are not needed for handling after unit arrives at the work site. only the forklift is needed to save installation time and costs.

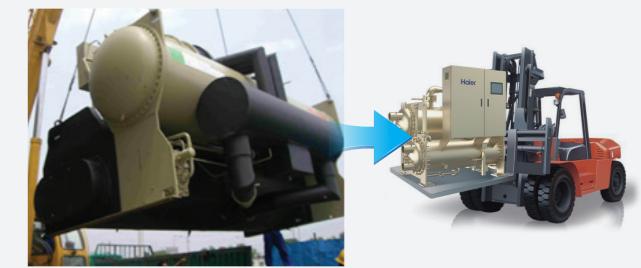


Haier modular water-cooled magnetic bearing centrifugal chiller with small size and light weight can perfectly solve the problems of conventional replacement.

## Management of more units in cascade

The scalable system can be extended for bigger available capacity. the compact design allows the combination of multiple units in confined spaces. the control allows to coordinate up to 16 units managing automatically the operation with maximum efficiency. the master unit shall manage the slave units connected in series to balance the running hours and the load between the units.

## Options/Accessories

Accessories	Standard	Optional
Power supply	3N-/380V/50Hz	3N-/380V/60Hz; 3N-/400V/50Hz; 3N-/460V/60Hz
Communication protocol	Cloud service	Modbus/BACnet
Harmonic filter	X	✓
Surge suppressors	✓	/
EMC/EMI filter	✓	/
Water inlet/outlet connection type	Victaulic	Flange
Thermal insulation thickness	30mm	25mm/40mm
Water side working pressure	1.0Mpa	1.6MPa/2.0MPa/2.5MPa
ASME pressure vessel	X	✓
Chilled water flowmeter	X	✓
Automatic online rubber ball cleaning device	X	✓
Channel steel base	X	✓

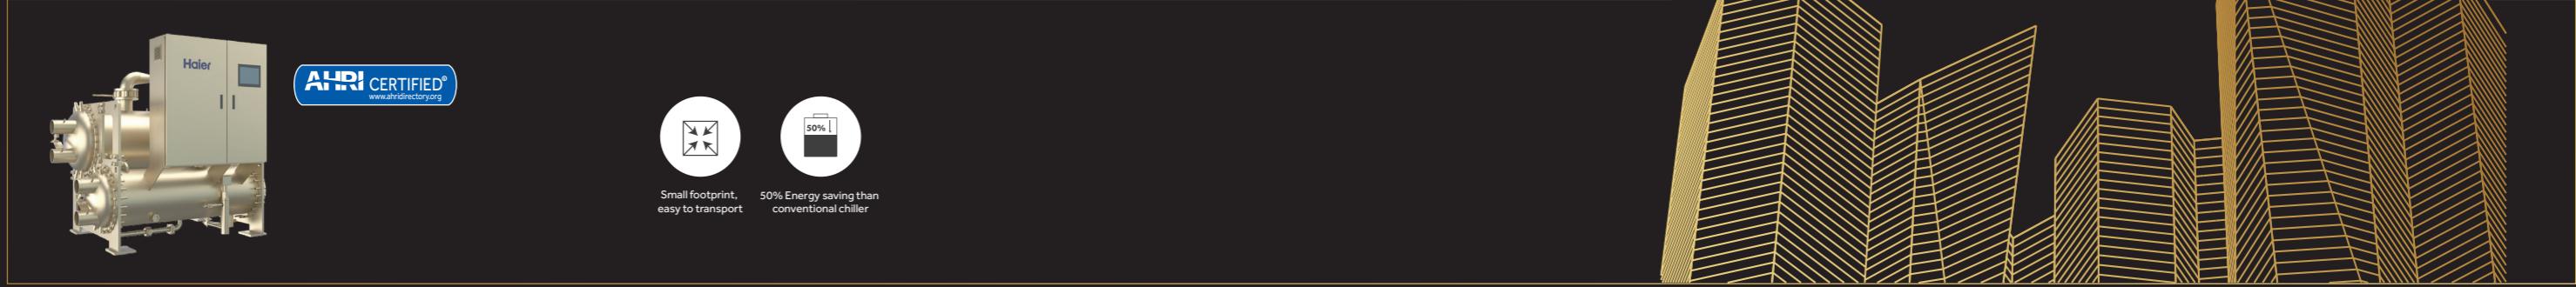



MODEL		CCWP0315TTNEACAN1		CCWP0420TTNEBCBN1		CCWP0500TTNECCN1							
Cooling capacity	Ton	90		120		142							
	kW	316.5		422		499.4							
Power input	kW	60.23		75.92		88.58							
COP	kW/kW	5.26		5.56		5.64							
	kW/Ton	0.669		0.633		0.624							
Starting amps of single compressor	A	2		2		2							
Min circuit amps. (Max. running current)	A	140		178		180							
Max. power input	kW	86		109		110							
Safe protection	High/low pressure protection, safety protection, short of water relay protection, anti-freeze protection, motor overload, phase sequence and lack of phase protection												
Compressor	Type												
	Starting mode												
Power supply	3-/380V/50Hz												
Refrigerant throttle type	Electronic expansion valve												
Controller type	PLC control												
Refrigerant	Type												
	Charge	kg	130	150		160							
Evaporator	Type												
	Water inlet/outlet temp.	°C											
	Inlet/outlet pipe	DN	125	125		150							
	Rated water flow	m³/h	54.4	72.6		85.9							
	Fouling Factor	m²·°C/kW											
	Standard pressure	MPa											
	Pass												
	Water side resistance	kPa	52.2	59.0		53.9							
	Type												
	Water side pressure drop												
Condenser	Inlet/outlet pipe	DN	125	125		150							
	Rated water flow	m³/h	64.8	85.6		101.1							
	Fouling factor	m²·°C/kW											
	Standard pressure	MPa											
	Pass												
	Water side pressure drop	kPa	61.2	66.9		84.7							
	Unit length	mm	2200	2200		2200							
	Unit width	mm	1400	1400		1400							
External dimension	Unit height	mm	1900	1900		1900							
	Net weight	kg	1780	1860		1900							
	Gross weight	kg	1820	1900		1940							
Weight	Operation weight	kg	2030	2110		2150							

Note:

1. Specification is based on the following condition:  
Evaporator chilled water outlet temperature 12°C, chilled water inlet temperature 7°C, fouling factor=0.0180m<sup>2</sup>K/kW.  
Condenser cooling water inlet water temperature 30°C, cooling water outlet temperature 35°C, fouling factor=0.0440m<sup>2</sup>K/kW.
- 2.Due to decimal point retention restrictions, some data may have slight differences when manually calculated.
3. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.
4. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.
5. Due to our policy of innovation, some specifications may be changed without notification.

# Dimensions

Outline dimension

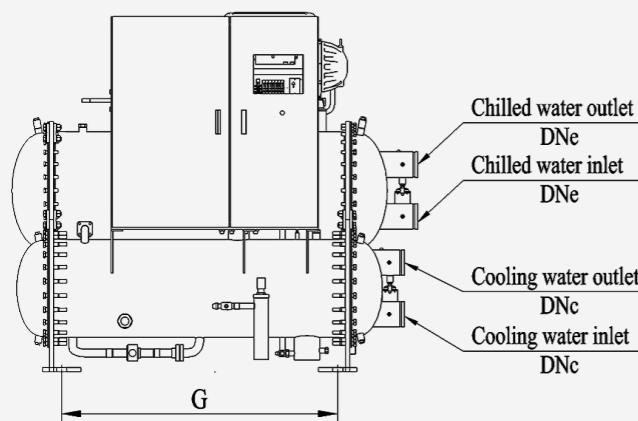
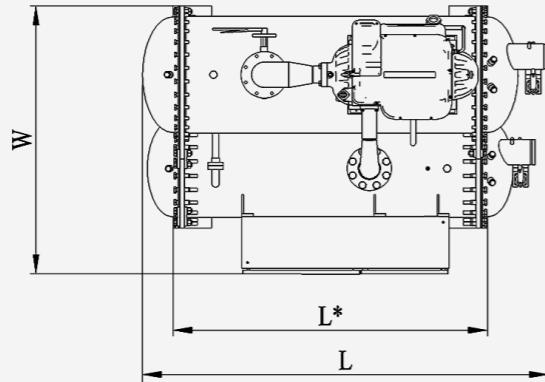


Note: If the unit with the length of "L" cannot access the elevator, the water boxes on both sides can be removed to make the length of "L\*", then the elevator can be accessed.

Model	Code	Boundary Dimensions(mm)		Installation Dimensions(mm)		Nozzle Dimensions(mm)									
		L	L*	W	H	B	G	D1	D2	F1	F2	M1	M2	DNe	DNC
CCWP0315TTNEACAN1		2200	1680	1400	1900	1035	1440	270	270	435	945	333	500	DN125	DN125
CCWP0420TTNEBCBN1		2200	1680	1400	1900	1035	1440	270	270	435	945	333	500	DN125	DN125
CCWP0500TTNECCN1		2200	1680	1400	1900	1035	1440	270	270	435	945	333	500	DN150	DN150


Installation foundation drawing

CCWP0315TTNEACAN1~CCWP0500TTNECCN1

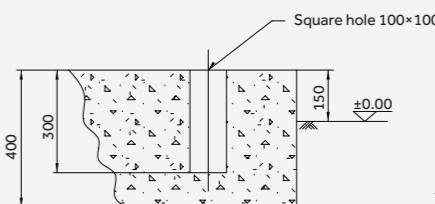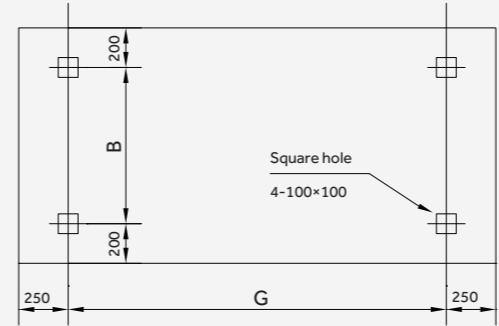

Model	G(mm)	B(mm)
CCWP0315TTNEACAN1	1440	1035
CCWP0420TTNEBCBN1	1440	1035
CCWP0500TTNECCN1	1440	1035


Space diagram

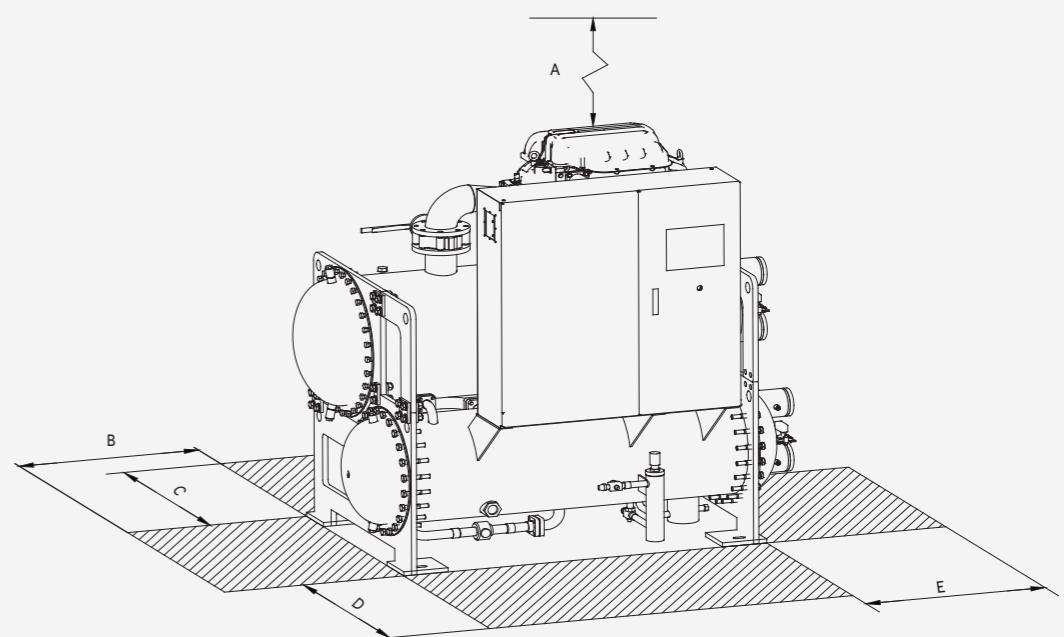


Space Data

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
CCWP0315TTNEACAN1	500	1700	1500	1500	1500
CCWP0420TTNEBCBN1	500	1700	1500	1500	1500
CCWP0500TTNECCN1	500	1700	1500	1500	1500

# Air-cooled Magnetic Bearing Centrifugal Chiller

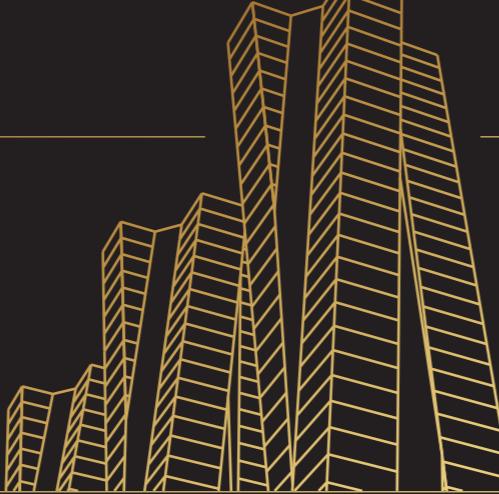


## Nomenclature

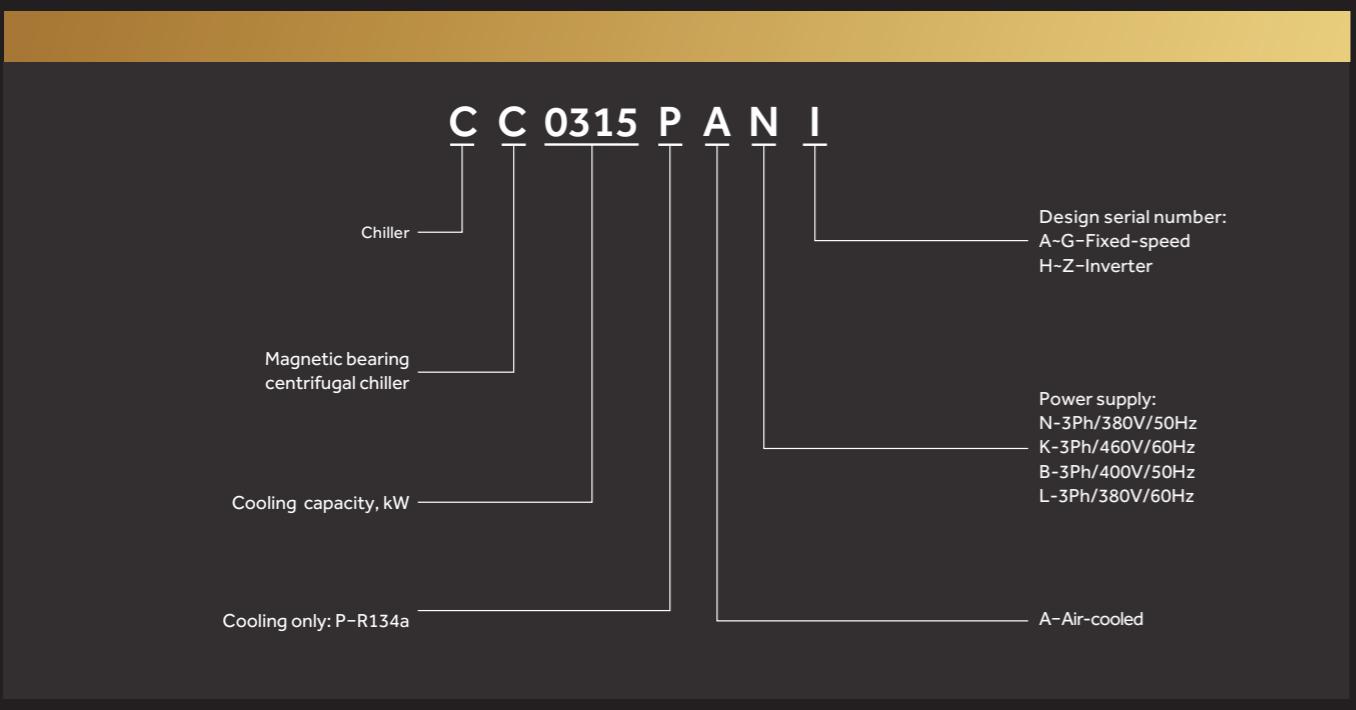

## High Efficiency

### High efficiency


Top-level efficiency thanks to advanced technological solutions, including magnetic bearing centrifugal compressors, flooded evaporator.

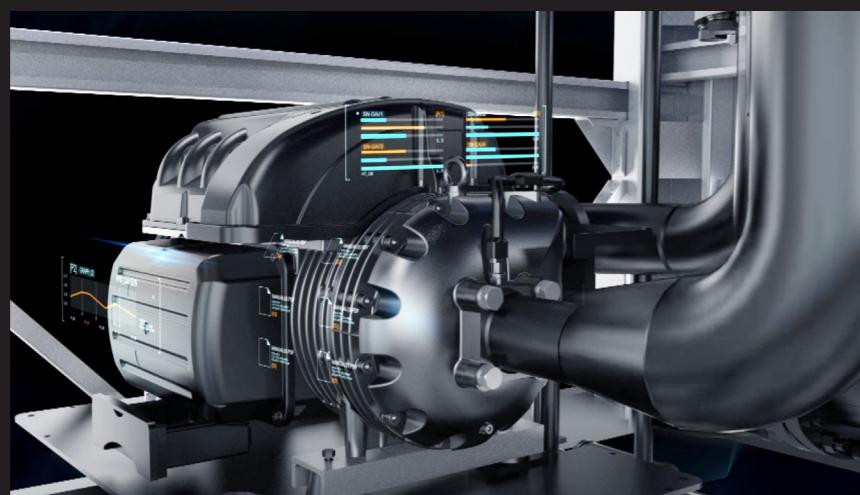

## Smart

### Smart control

When multiple units are working together, Haier unique control can balance the running hours of each compressor and the load between the units, avoiding faults caused by long time of continuous running. this can effectively extend the service life of the units.

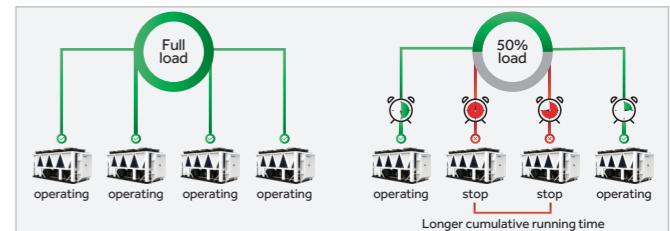

## Comfortable

### Low sound level and vibration

Because of the introduce of magnetic bearing compressor, extremely silent operation and highly reduced vibrations are achieved.




- Rugged design**
1. Top protection against splash water
  2. Durable, corrosion-resistant components for the highest standards
- Increased refrigerating performance**
1. Significant increase in airflow to the high-performance heat exchanger
  2. Enables heat exchanger downsizing
- Lower sound emission**
1. Optimized aerodynamics
  2. Noise reduction up to 8 dB(A)

## High Reliability

### Wide working range

Outside ambient temperature 15°C~43°C.

※ For other operating temperature, please contact Haier local agencies.

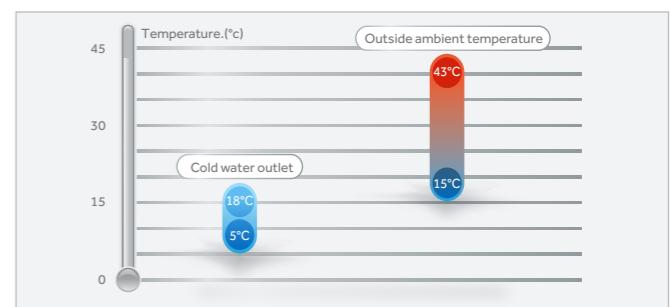

## Options/Accessories

Accessories	Standard	Optional
Power supply	3N-/380V/50Hz	3N-/380V/60Hz; 3N-/400V/50Hz; 3N-/460V/60Hz
Communication protocol	Cloud service	Modbus/BACnet
Harmonic filter	X	√
Surge suppressors	√	/
EMC/EMI filter	√	/
Water inlet/outlet connection type	Victaulic	Flange
Water side working pressure	1.0Mpa	1.6Mpa
Fan	AC fan	VSD fan
ASME pressure vessel	X	√
Chilled water flowmeter	X	√
Pipe connection between modules	Pipe and victaulic	Flexible connection
Thermal insulation thickness	30mm	25mm/40mm



**AHRI CERTIFIED®**  
www.ahrdirectory.org



Oil free inverter technology



2A starting current



MODEL		CC0315PANI	CC0350PANI		CC0440PANI	CC0630PANI	CC0700PANI	CC0790PANI	CC0880PANI
Combination		A	B		C	2*A	2*B	B+C	2*C
Cooling capacity	kW	315.0	350.0		440.0	630.0	700.0	790.0	880.0
Total power input	kW	92.60	102.0		125.0	185.2	203.0	226.0	246.5
COP	kW/kW	3.402	3.431		3.520	3.402	3.448	3.496	3.570
Starting current(Compressor)	A	2	2		2	2	2	2	2
Max. running current	A	200	250		280	400	500	530	560
Max. power input	kW	110	148		166	220	296	314	332
Power supply							3N-/380V/50Hz		
Refrigerant throttle type							Electronic expansion valve		
Safe protection							Compressor overload protection, safe protection, low water flow protection, antifreezing protection, fan motor overload protection, lack of phase protection		
Compressor	Type						Magnetic bearing compressor		
	Quantity	1	1		1	2	2	2	2
Refrigerant	Type						R134a		
	Charge	kg	200	220		270	400	440	490
Air side heat exchanger	Type						High efficiency copper tube+hydroponic alunimum foil		
	Fan typ						Axial fan with low noise		
	Fan quantity	6	6		8	12	12	14	16
Water side heat exchanger	Type						Flood type		
	Rated water flow	m³/h	54	60	76	108	120	136	151
	Inlet/outlet pipe	DN	150	150		150	150	150	150
	Fouling factor	m²·°C/kW					0.018		
	Standard pressure	MPa					1		
	Water side pressure drop	kPa	70	75		88	72	76	84
External dimension	Unit length	mm	4020	4020		5220	7650	7650	8850
	Unit width	mm	2240	2240		2240	2240	2240	2240
	Unit height	mm	2420	2420		2420	2420	2420	2420
Weight	Net weight	kg	3060	3130		3700	6070	6210	6780
	Gross weight	kg	3110	3180		3765	6170	6310	6895
	Operation weight	kg	3260	3330		3945	6350	6490	7080

Note:  
1. Specification is based on the following condition: Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.018m²•K/kW. Outdoor ambient temperature 35°C.

2. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.

3. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.

4. Except the basic models CC0315PANI/CC0350PANI/CC0440PANI, other models are combined by the basic models. And they are also separately transported.

5. Due to our policy of innovation, some specifications maybe changed without notification.



AHRI CERTIFIED®  
www.ahrdirectory.org



Oil free inverter  
technology



2A starting  
current



MODEL	CC0980PANI	CC1050PANI	CC1140PANI	CC1230PANI	CC1320PANI
Combination	2*A+B	3*B	2*B+C	B+2*C	3*C
Cooling capacity	kW	980.0	1050	1140	1230
Total power input	kW	287.2	303.0	325.5	348.5
COP	kW/kW	3.412	3.465	3.502	3.529
Starting current(Compressor)	A	2	2	2	2
Max. running current	A	650	750	780	810
Max. power input	kW	368	444	462	480
Power supply				3N~/380V/50Hz	
Refrigerant throttle type				Electronic expansion valve	
Safe protection				Compressor overload protection, safe protection, low water flow protection, antifreezing protection, fan motor overload protection, lack of phase protection	
Compressor	Type				Magnetic bearing compressor
	Quantity	3	3	3	3
Refrigerant	Type				R134a
	Charge	kg	620	660	710
Air side heat exchanger	Type				High efficiency copper tube+hydroponic alunminum foil
	Fan typ				Axial fan with low noise
	Fan quantity	18	18	20	22
	Type				Flood type
Water side heat exchanger	Rated water flow	m³/h	169	181	196
	Inlet/outlet pipe	DN	250	250	250
	Fouling factor	m²·°C/kW			0.018
	Standard pressure	MPa			1
	Water side pressure drop	kPa	38	40	42
External dimension	Unit length	mm	11270	11270	12470
	Unit width	mm	2240	2240	2240
	Unit height	mm	2420	2420	2420
Weight	Net weight	kg	9150	9290	9860
	Gross weight	kg	9300	9440	10025
	Operation weight	kg	9580	9720	10385

- Note:  
1. Specification is based on the following condition: Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.018m²·K/kW. Outdoor ambient temperature 35°C.  
2. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.  
3. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.  
4. Except the basic models CC0315PANI/CC0350PANI/CC0440PANI, other models are combined by the basic models. And they are also separately transported.  
5. Due to our policy of innovation, some specifications maybe changed without notification.




MODEL		CC1400PANI	CC1490PANI	CC1580PANI	CC1670PANI	CC1760PANI	
Combination		4*B	3*B+C	2*B+2*C	B+3*C	4*C	
Cooling capacity	kW	1400	1490	1580	1670	1760	
Total power input	kW	400.0	423.8	445.0	462.6	482.2	
COP	kW/kW	3.500	3.516	3.551	3.610	3.650	
Starting current(Compressor)	A	2	2	2	2	2	
Max. running current	A	1000	1030	1060	1090	1120	
Max. power input	kW	592	610	628	646	664	
Power supply		3N-/380V/50Hz					
Refrigerant throttle type		Electronic expansion valve					
Safe protection		Compressor overload protection, safe protection, low water flow protection, antifreezing protection, fan motor overload protection, lack of phase protection					
Compressor	Type	Magnetic bearing compressor					
	Quantity	4	4	4	4	4	
Refrigerant	Type	R134a					
	Charge	kg	880	930	980	1030	1080
Air side heat exchanger	Type	High efficiency copper tube+hydroponic alunminum foil					
	Fan typ	Axial fan with low noise					
	Fan quantity	24	26	28	30	32	
Water side heat exchanger	Type	Flood type					
	Rated water flow	m³/h	241	256	272	287	303
	Inlet/outlet pipe	DN	250	250	250	250	250
	Fouling factor	m²·°C/kW	0.018				
	Standard pressure	MPa	1				
	Waterside pressure drop	kPa	75	78	80	86	90
External dimension	Unit length	mm	14900	16100	17300	18480	19680
	Unit width	mm	2240	2240	2240	2240	2240
	Unit height	mm	2420	2420	2420	2420	2420
Weight	Net weight	kg	12370	12940	13510	14080	14650
	Gross weight	kg	12570	13155	13740	14325	14910
	Operation weight	kg	13100	13585	14300	15015	15730

Note:  
1. Specification is based on the following condition: Evaporator chilled water outlet temperature 7°C, chilled water inlet temperature 12°C, fouling factor=0.018m²·K/kW. Outdoor ambient temperature 35°C.  
2. Above products water side pressure is 1.0MPa. Contact with Haier local agencies, if you need higher pressure product.  
3. Above parameters are based on the standard products. For customized products, please contact Haier local agencies.  
4. Except the basic models CC0315PANI/CC0350PANI/CC0440PANI, other models are combined by the basic models. And they are also separately transported.  
5. Due to our policy of innovation, some specifications may be changed without notification.


# Dimensions

Outline dimension

Air-cooled magnetic bearing centrifugal chiller dimension diagram



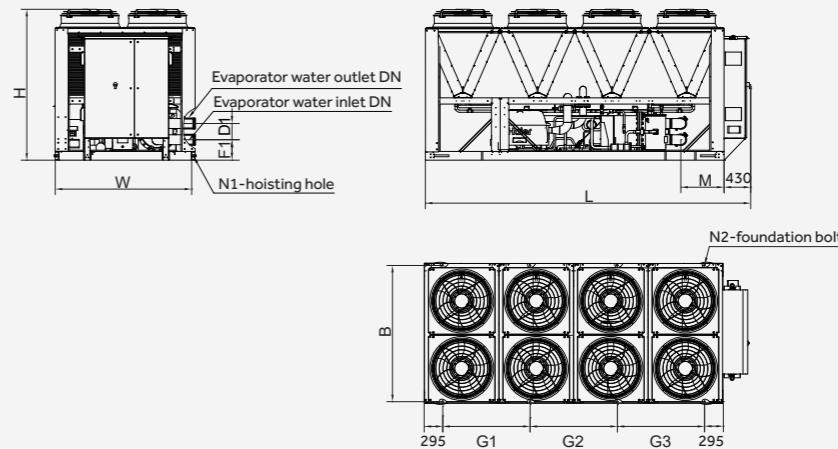


Model	Dimension(mm)			Installation dimensions(mm)			Pipe connection dimension(mm)				Hoisting hole number	Foundation bolt number	
	L	W	H	B	G1	G2	G3	D1	F1	M	DN		
CC0315PANI	4020	2240	2420	2190	1500	1500		260	330	355	DN150	6	6
CC0350PANI	4020	2240	2420	2190	1500	1500		260	330	355	DN150	6	6
CC0440PANI	5220	2240	2420	2190	1400	1400	1400	260	330	690	DN150	6	8

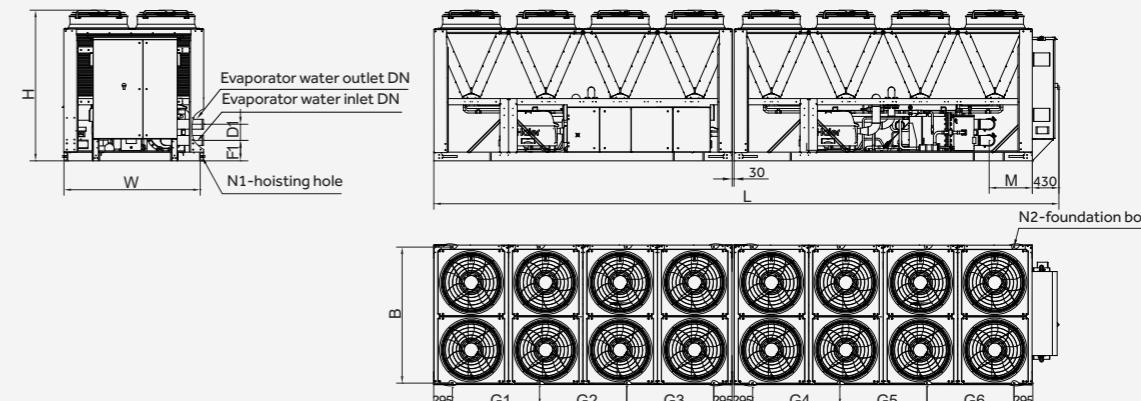

Model	Dimension(mm)			Installation dimensions(mm)						Pipe connection dimension(mm)			Hoisting hole number	Foundation bolt number		
	L	W	H	B	G1	G2	G3	G4	G5	G6	D1	F1	M	DN		
CC0630PANI	7650	2240	2420	2190	1500	1500		1500	1500		260	330	355	DN150	12	12
CC0700PANI	7650	2240	2420	2190	1500	1500		1500	1500		260	330	355	DN150	12	12
CC0790PANI	8850	2240	2420	2190	1500	1500		1400	1400	1400	260	330	690	DN150	12	14
CC0880PANI	10040	2240	2420	2190	1400	1400	1400	1400	1400	1400	260	330	690	DN150	12	16


# Dimensions

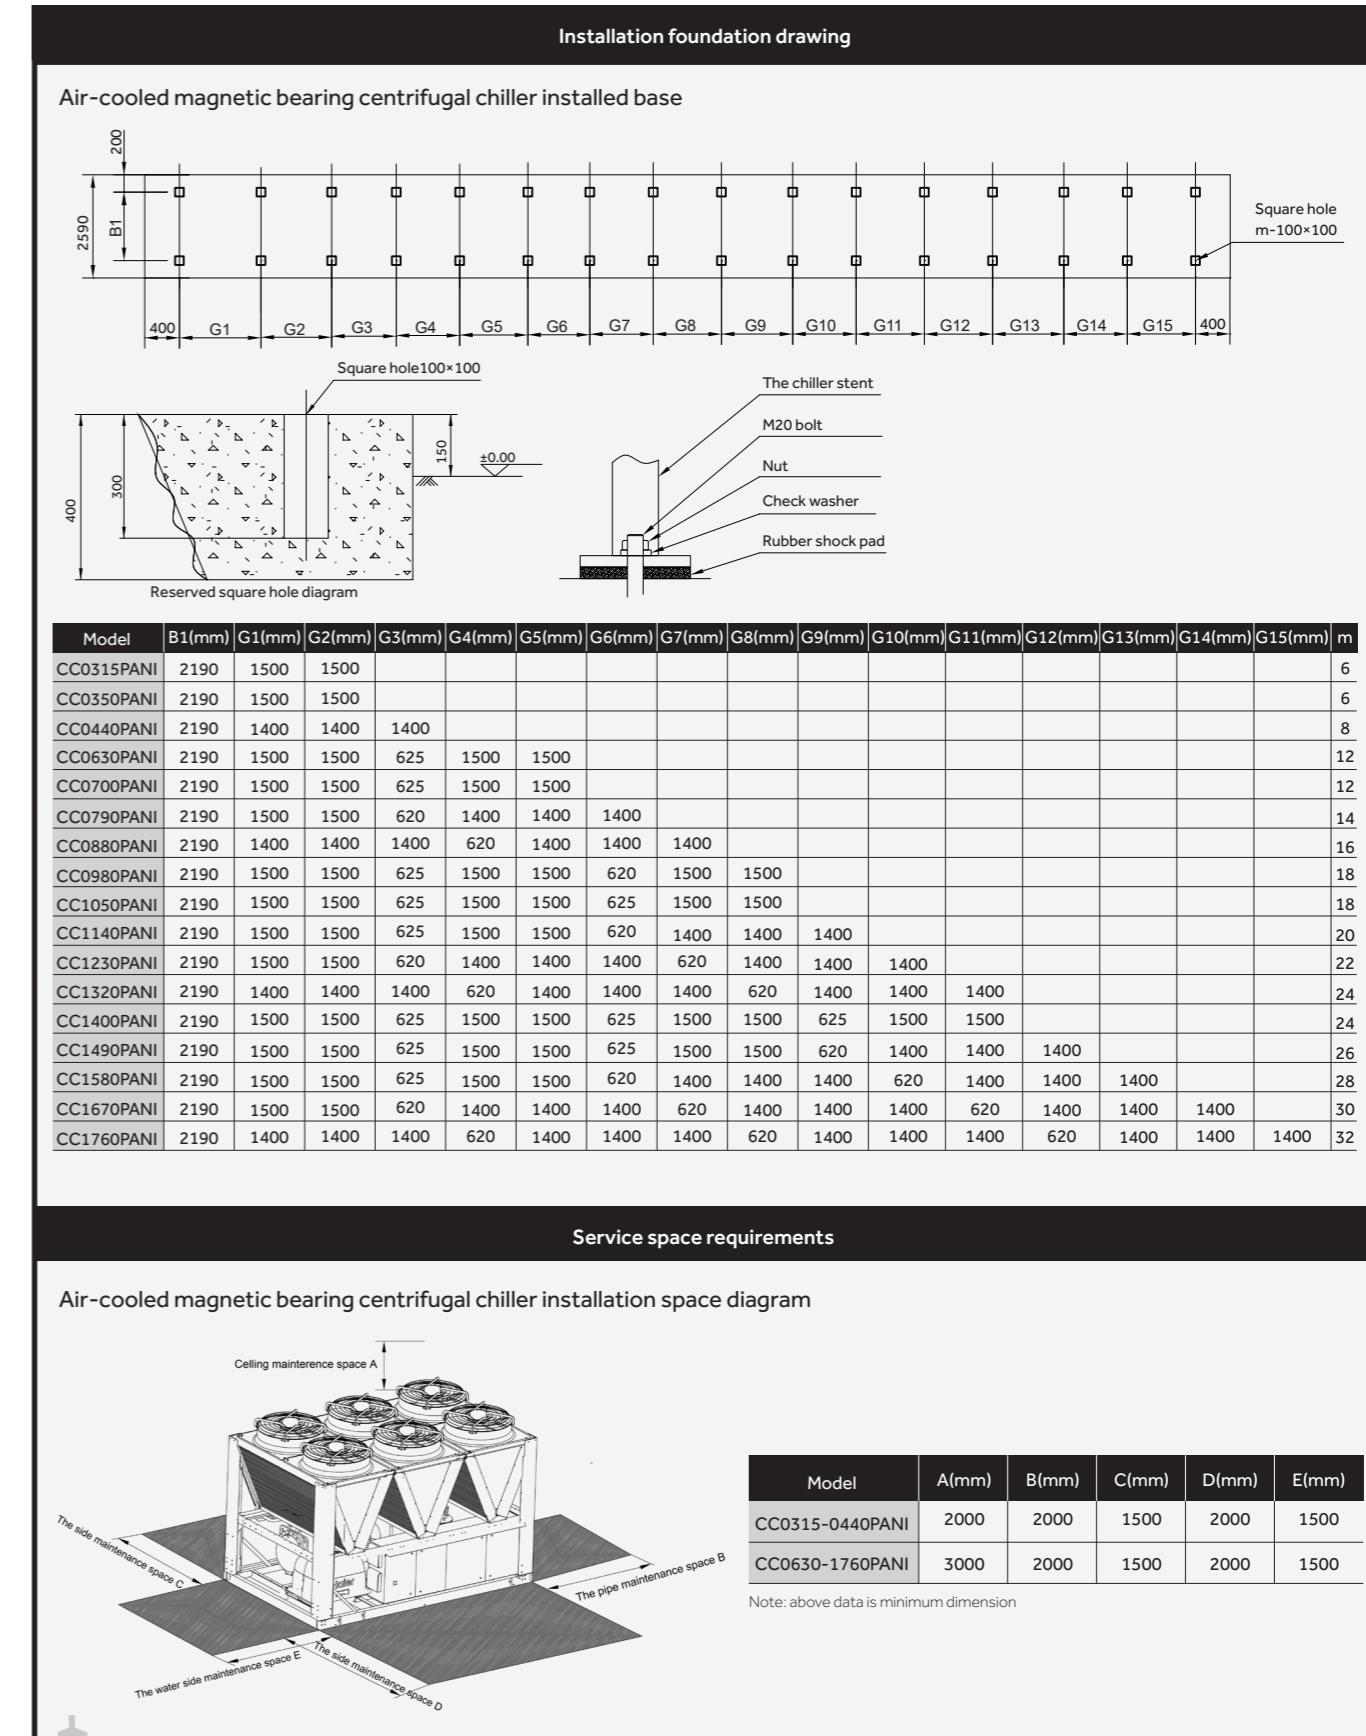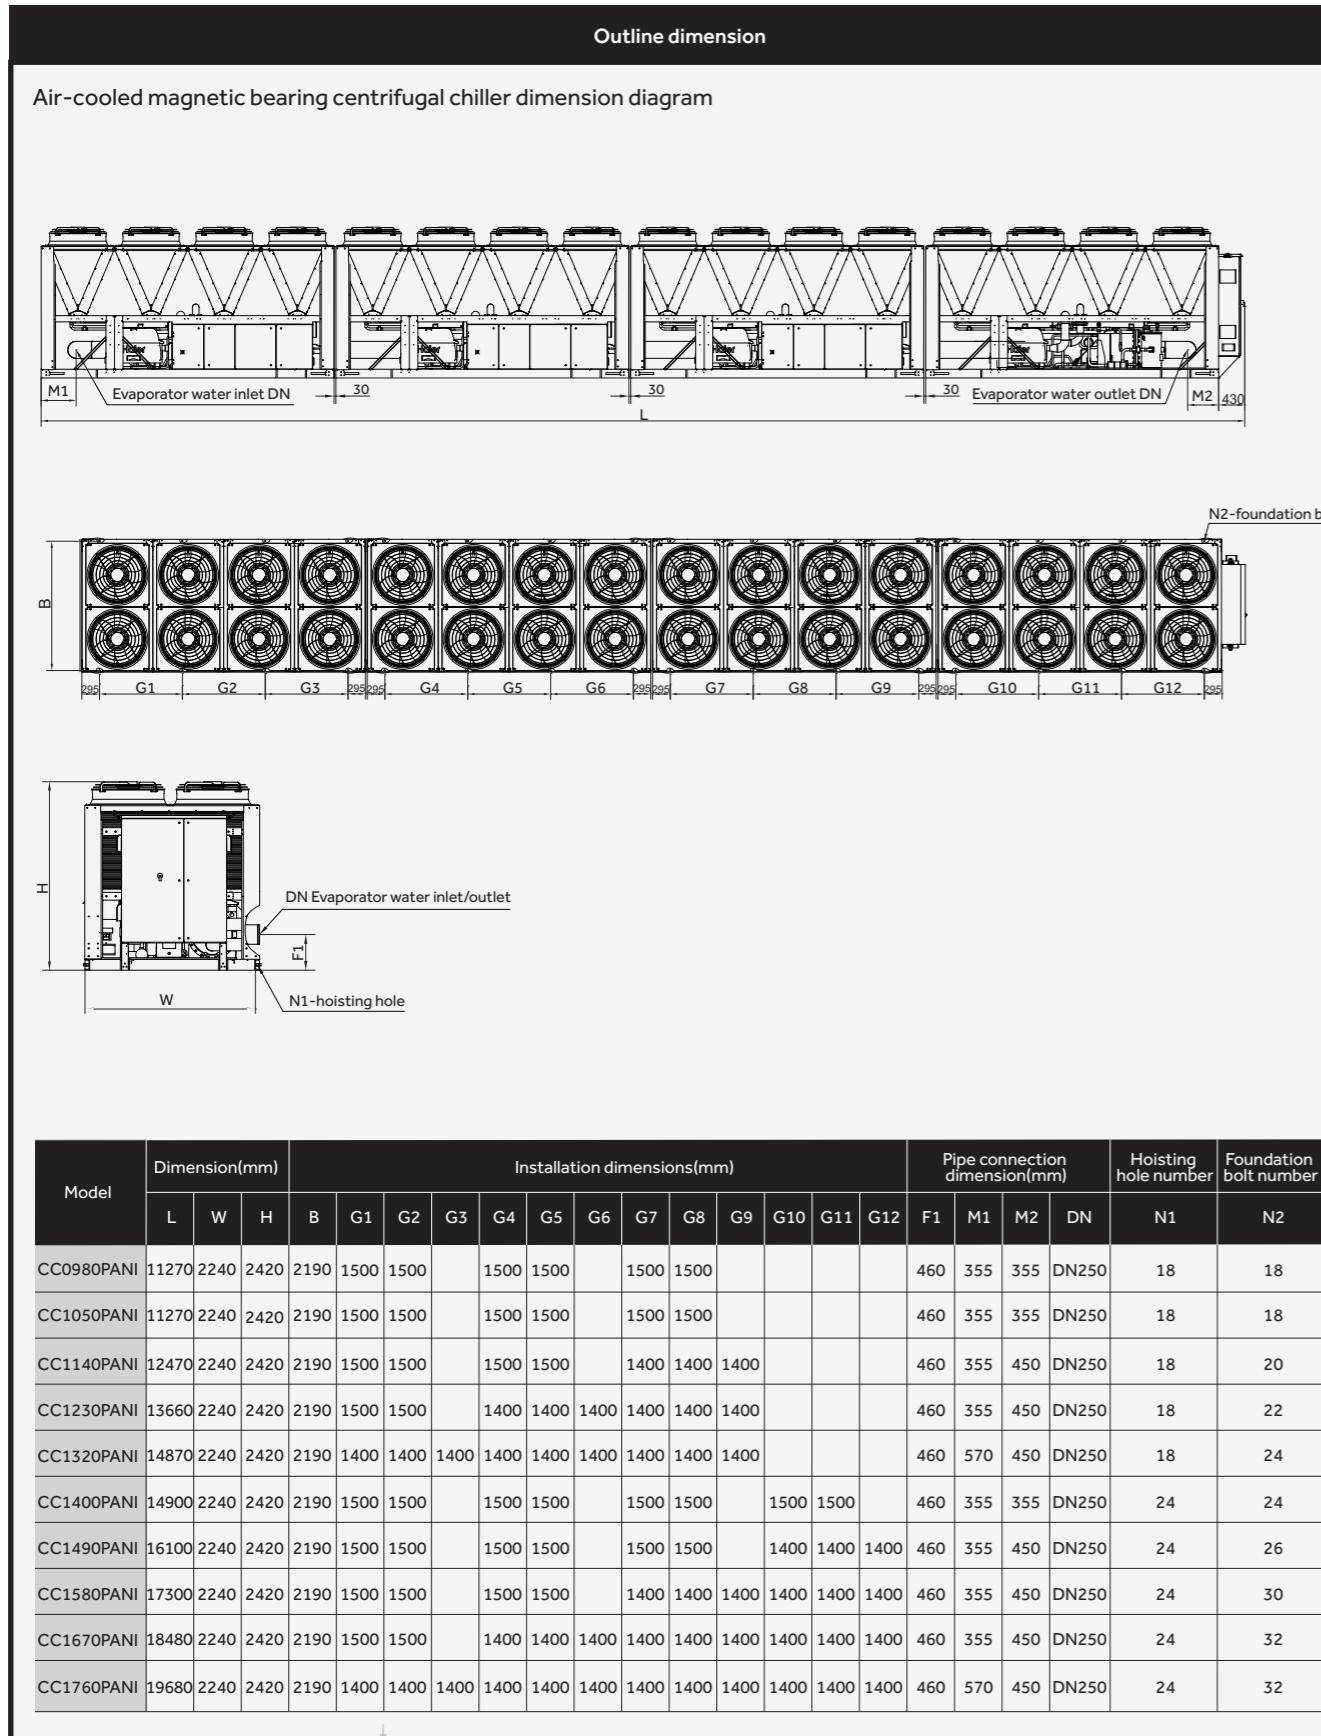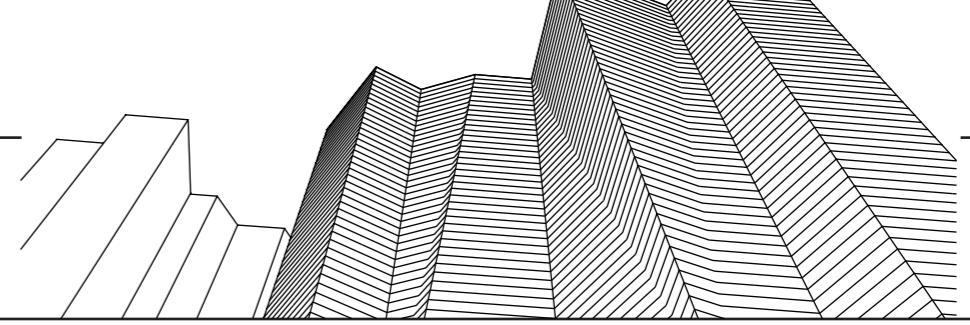

# Evaporatively-cooled Magnetic Bearing Centrifugal Chiller



## Nomenclature

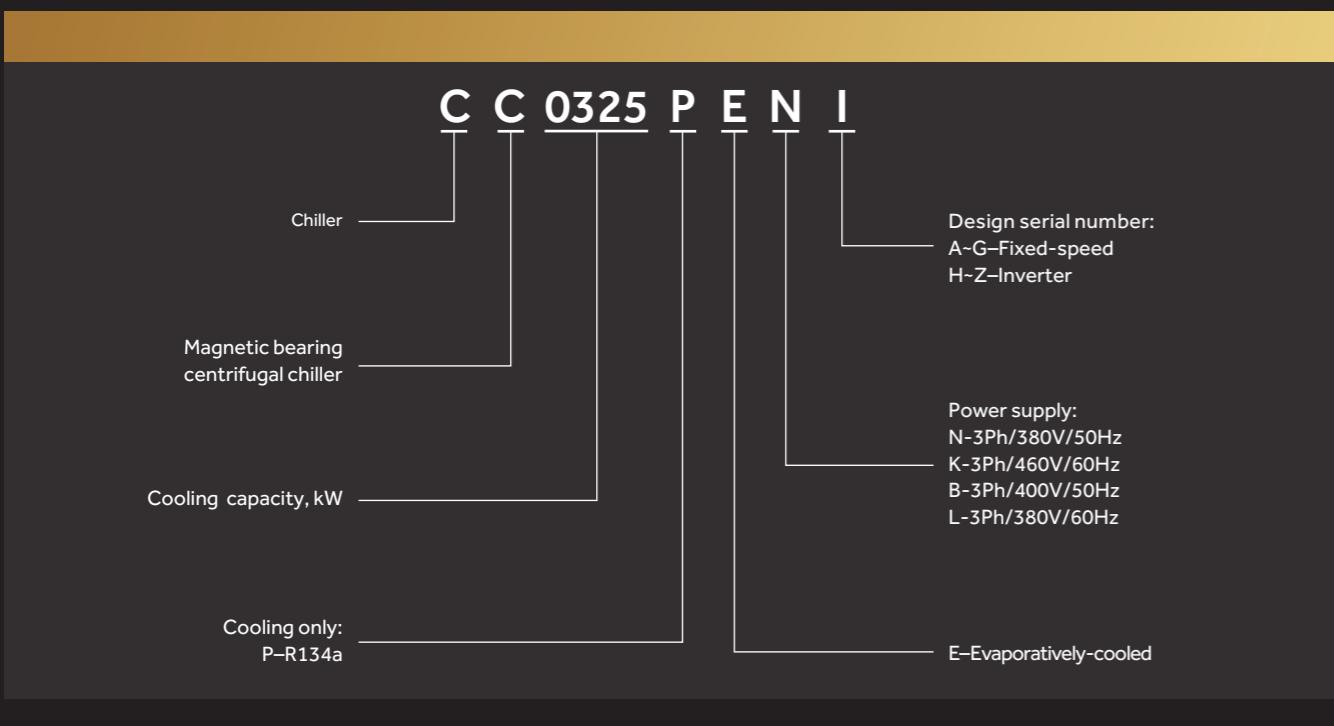

## High Efficiency

### High efficiency




As a new generation of energy-saving chiller, Haier evaporatively-cooled magnetic bearing centrifugal chiller achieves breakthrough in combination of magnetic bearing technology and evaporative cooling technology. the unit adopts high efficiency evaporatively-cooled condenser, which improved heat exchange efficiency by more than 10%. combined with magnetic bearing oil free inverter technology, the chiller is 30% energy saving than air-cooled chiller and over 15% energy saving than water-cooled system (including chiller and cooling tower).

Condenser type	Air cooled condenser	Water cooled condenser	Evaporatively-cooled condenser
Heat-exchange ways	Large volume axial fans allow air to take away the sensible heat of condensation.	Need high power cooling pump and large air volume cooling tower fan.	The condensing heat is carried away through the evaporation of water film in the evaporatively-cooled condenser, and then the latent heat is carried to the atmosphere by the small axial fan.
Air volume(m <sup>3</sup> /(h·kW))	420-500	/	110-135
Cooling water circulation volume per 100kW cooling capacity	/	20-23	≤11.6
Cooling pump head	/	20-40	≈5
Condensing temperature	45-53	38-40	30-35
Energy consumption per 1kW cooling capacity	0.023-0.092	0.02-0.04	≈0.014




## Evaporatively-cooled condenser

- Air flow and water evaporation take away the condensation heat of refrigerant.
- Condensing temp. can be lower than that of air-cooled and water-cooled condensers.

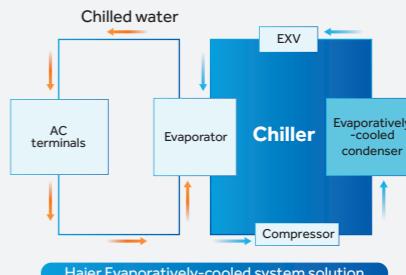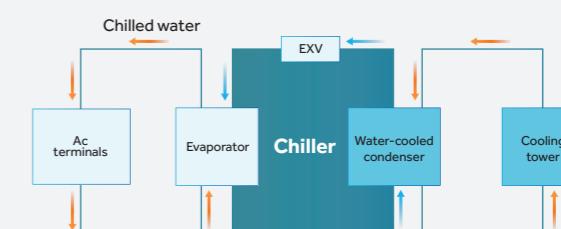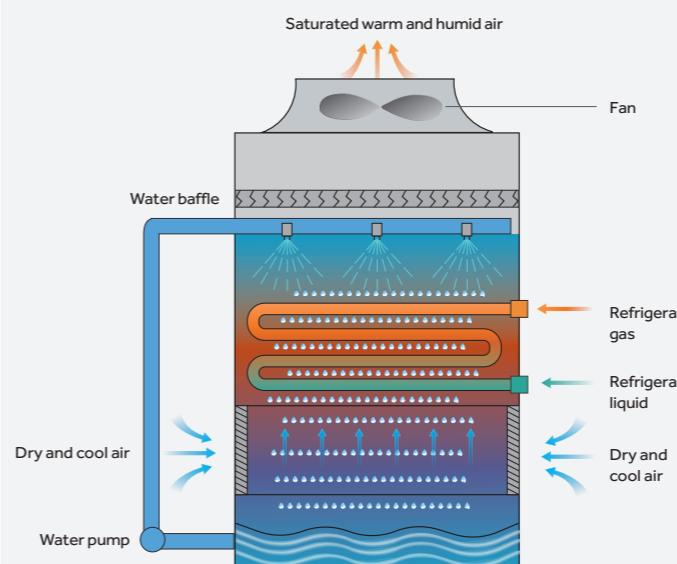

## Falling film evaporator


- The falling film evaporator is more efficient, because the refrigerant is sprayed over the tubes, heat transfer can be improved greatly.
- The refrigerant charge volume can be reduced by 30%.

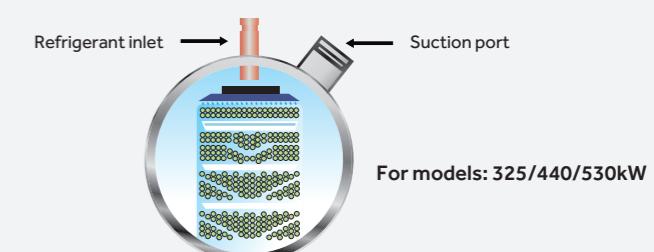

## Economical

### Saving costs and space

Thanks to the evaporatively-cooled condenser, which acts as a cooling tower itself, the system does not require a cooling tower, cooling water pumps, cooling water pipes and other equipments, reducing the installation cost and footprint. avoiding the problem of water pumps and water treatment caused by heavy use of water, which greatly reduces the operating cost. in addition, the compact design of the evaporatively-cooled magnetic bearing centrifugal chiller also greatly reduces the floor space.

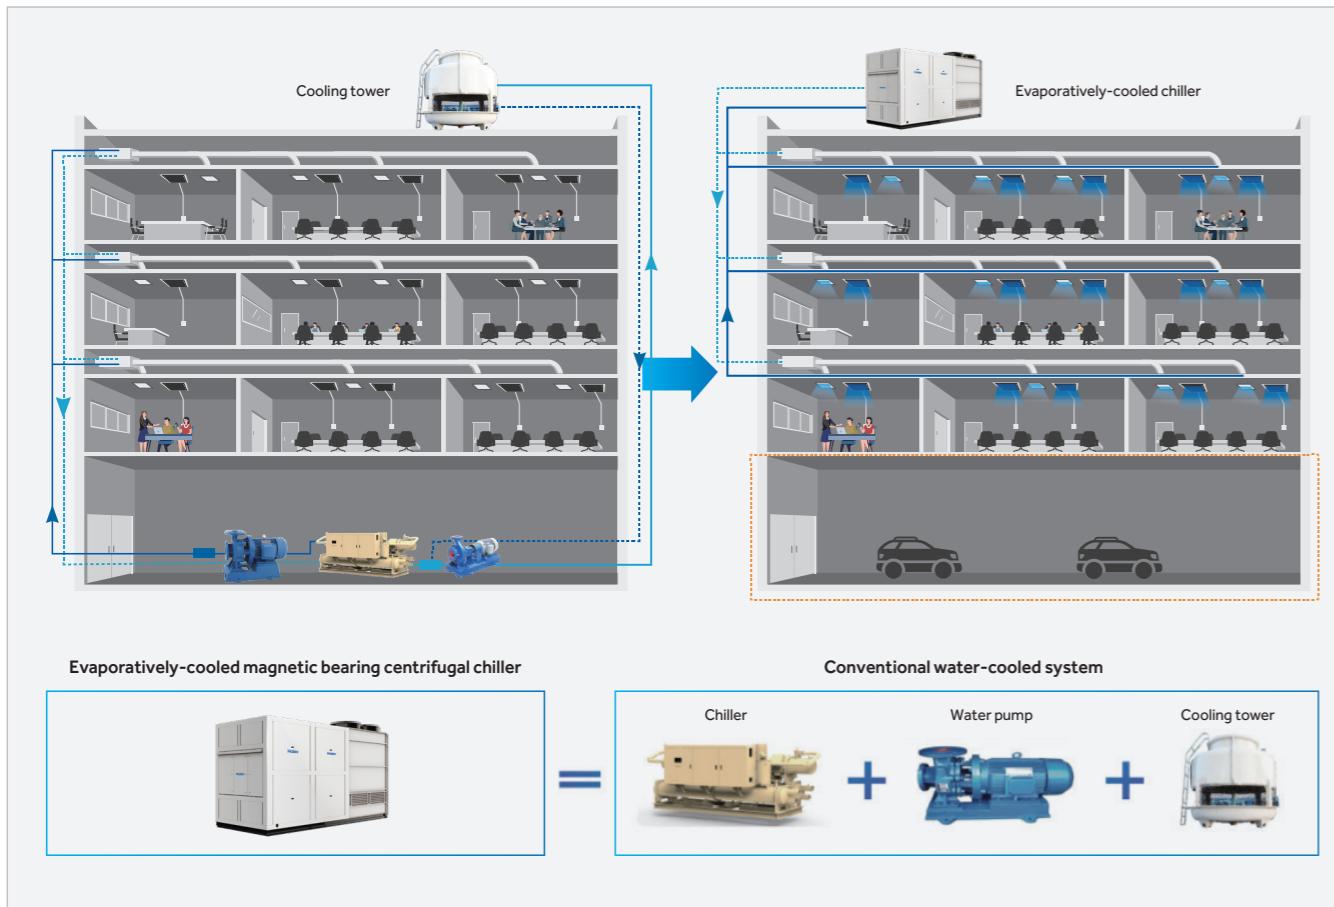

### Saving water

Each 1 kg of cooling water can remove 16.75 ~ 25.12 kJ of heat in water-cooled condenser, while it can remove about 2428 kJ of heat by evaporation at atmospheric pressure. therefore, the theoretical water consumption of evaporatively-cooled condenser is only 1% of that of water-cooled condenser. In fact, the water consumption of evaporatively-cooled is about 5% ~ 10% of that of the water-cooled condenser due to blowing loss, sewage water exchange.



## Comfortable

### Low sound level

The unit adopts the magnetic bearing centrifugal compressor, fully frictionless operation making the noise lower. compared with water-cooled system, the evaporatively-cooled chiller uses small air volume fan to dissipate heat rather than cooling tower, which greatly reduces the noise of the whole system.

## Convenient

### Flexible installation

The integrated design makes installation easier and more free. the chiller can be installed in the plant room (exhaust fan should be used for ventilation) or installed on the rooftop. in some specific application scenarios where there are no outdoor space and plant room for installation, like metro project, it can be installed in the air conditioning shaft.

Installation site	Air-cooled	Water-cooled	Evaporatively-cooled	Remark
Outdoor installation	●	X	●	Both air-cooled and evaporatively-cooled units can be installed outdoors, but evaporatively-cooled chiller has higher efficiency than air-cooled chiller
Plant room	X	●	●	The water-cooled system also needs additional cooling tower installed in outdoor space.
Air conditioning shaft	●	X	●	The air volume demand of the unit is only 1/3 of that of the air-cooled chiller. Poor ventilation of the shaft reduces efficiency of air-cooled chiller greatly.

### Master/slave function


- All models have master/slave function, which allows maximum 4 units to be managed in the same system without the need of external control devices. once one unit is set to be the master, the others will operate as slaves based on the inputs provided by the master.

- Master/slave control is possible to balance the working hours of the compressors to enhance reliability and extend the service life of the system.

## High Reliability

### Anticorrosion design

The whole evaporatively-cooled condenser adopts integral hot dipping zinc with a zinc layer thickness of up to 0.07mm, which improves the anticorrosion ability greatly.

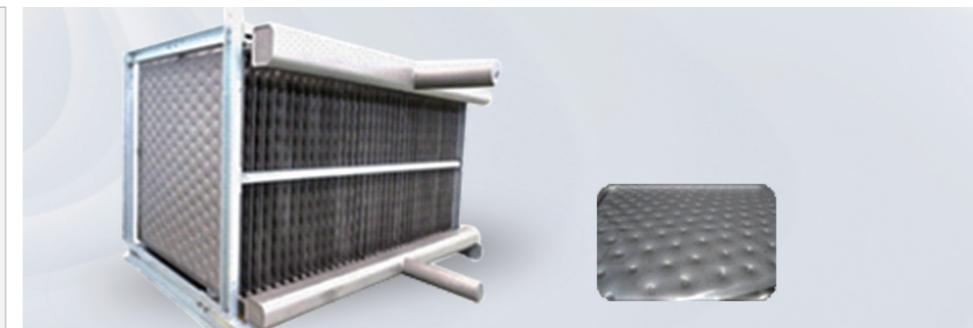

## Options/Accessories

Accessories	Standard	Optional
Power supply	3N-/380V/50Hz	3N-/380V/60Hz; 3N-/400V/50Hz; 3N-/460V/60Hz
Communication protocol	Cloud service	Modbus/BACnet
Active power filter	X	✓
Water inlet/outlet connection type	Victaulic	Flange
Water side working pressure	1.0Mpa	1.6MPa/2.0MPa/2.5MPa
ASME pressure vessel	X	✓
Chilled water flowmeter	X	✓
Thermal insulation thickness	30mm	25mm/40mm
Fan	AC fan	VSD fan



MODEL		CC0325PENI	CC0440PENI	CC0530PENI	
Cooling capacity	kW	315	440	528	
	Ton	90	125	150	
Power input	kW	68.2	90.6	110.4	
COP	kW/kW	4.62	4.86	4.78	
Power supply		3N-/380V/50Hz			
Starting current (Compressor)	A	2	2	2	
Max. running current	A	175.7	196.5	213.3	
Compressor	Type	Magnetic bearing centrifugal compressor			
	Quantity	1	1	1	
Capacity control		2%-100%			
Refrigerant	Type	R134a			
	Charge	kg	170	210	250
Evaporator	Type	Falling type			
	Fouling factor	m <sup>2</sup> •°C/kW	0.018		
	Water inlet/outlet temp.	°C	12°C/7°C		
	Rated Water flow	m <sup>3</sup> /h	54	76	91
	Inlet/outlet pipe	DN	100	125	125
Condenser	Water side pressure drop	kPa	<80		
	Ambient dry/wet bulb temp.	°C	24°C		
	Type	Evaporatively-cooled condenser			
	Fan type	Axial fan			
External dimension	Water consumption	m <sup>3</sup> /h	0.53	0.63	0.72
	Length	mm	4800	5600	4700
	Width	mm	2300	2300	3000
Weight	Height	mm	3000	3000	3000
	Net weight	kg	5650	5950	7100
	Operation weight	kg	7500	8200	9600

Note:

1.Nominal cooling conditions: chilled water inlet/outlet temperature: 12/7°C, dry/wet bulb temperature: 35°C/24°C.

2.Supplementing cooling water temp.: 30°C, Supplementing water pressure: 0.06-0.15MPa.

3.When the unit is installed in the machine room and needs to take over the inlet and outlet of the unit, the condensation exhaust resistance must be taken into account in the equipment selection.

External static pressure of the condensing exhaust fan should be calculated according to the air velocity of the inlet louver in the machine room ≤2.0m/s and meeting the design air demand of the unit.

4.Water treatment scheme is recommended for water replenishment system.

5.Except above standard models, Haier can be customized non-standard products according to customer requirements.


6.Due to our policy of innovation some specifications maybe changed without notification.

7.Please consult technical personnel for detailed water pipes connection.

# Dimensions


Outline dimension

CC0325PENI Unit dimension

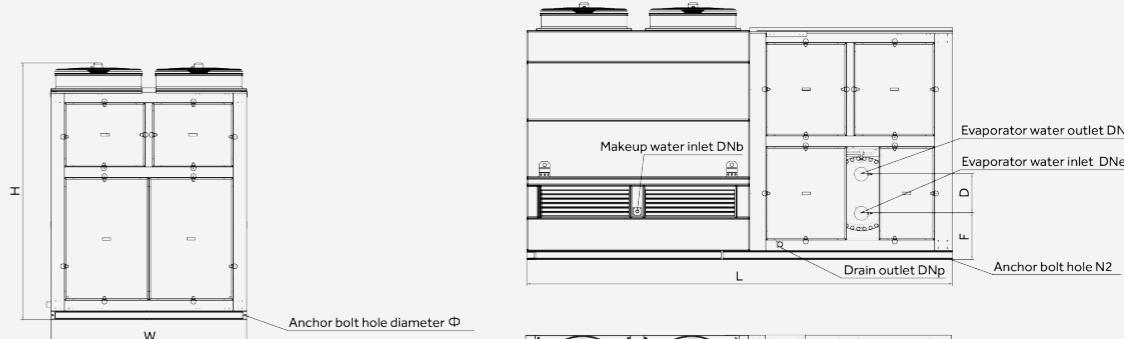

Model	Code	Dimension(mm)			Installation dimensions(mm)			Pipe connection dimension(mm)			Anchor bolt hole diameter	Anchor bolt hole number
		L	W	H	D	F	DNe	DNb	DNP			
CC0325PENI		5180	2200	2850	440	515	DN100	DN25	DN50	18	6	

CC0440PENI ~ CC0530PENI Unit dimension

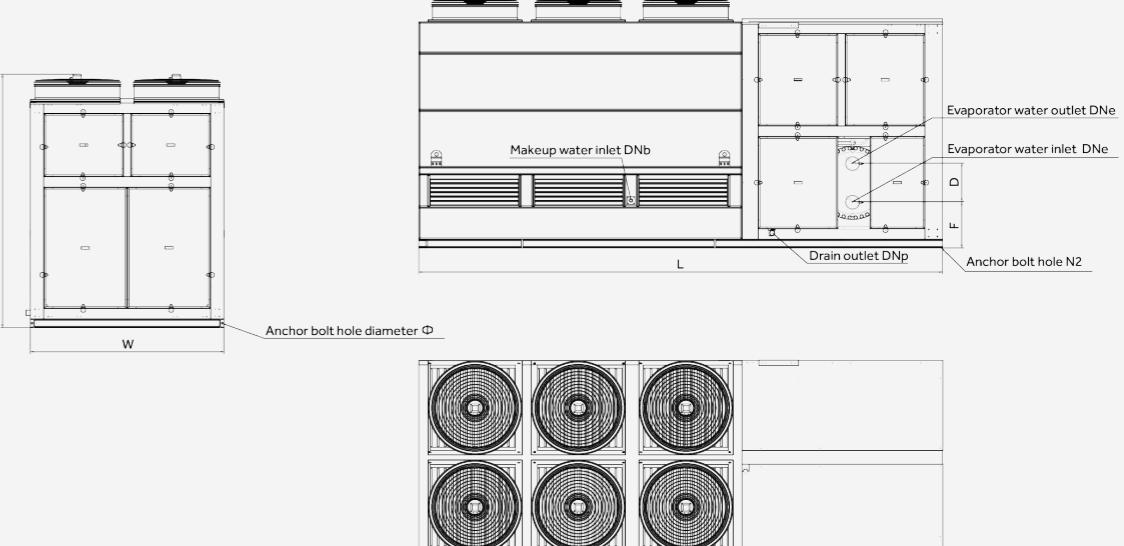


Model	Code	Dimension(mm)			Installation dimensions(mm)			Pipe connection dimension(mm)			Anchor bolt hole diameter	Anchor bolt hole number
		L	W	H	D	F	DNe	DNb	DNP			
CC0440PENI		5780	2200	2850	440	515	DN125	DN25	DN50	18	6	
CC0530PENI		6380	2200	2850	440	515	DN125	DN25	DN50	18	6	

# Dimensions


Outline dimension

CC0630PENI ~ CC0700PENI Unit dimension


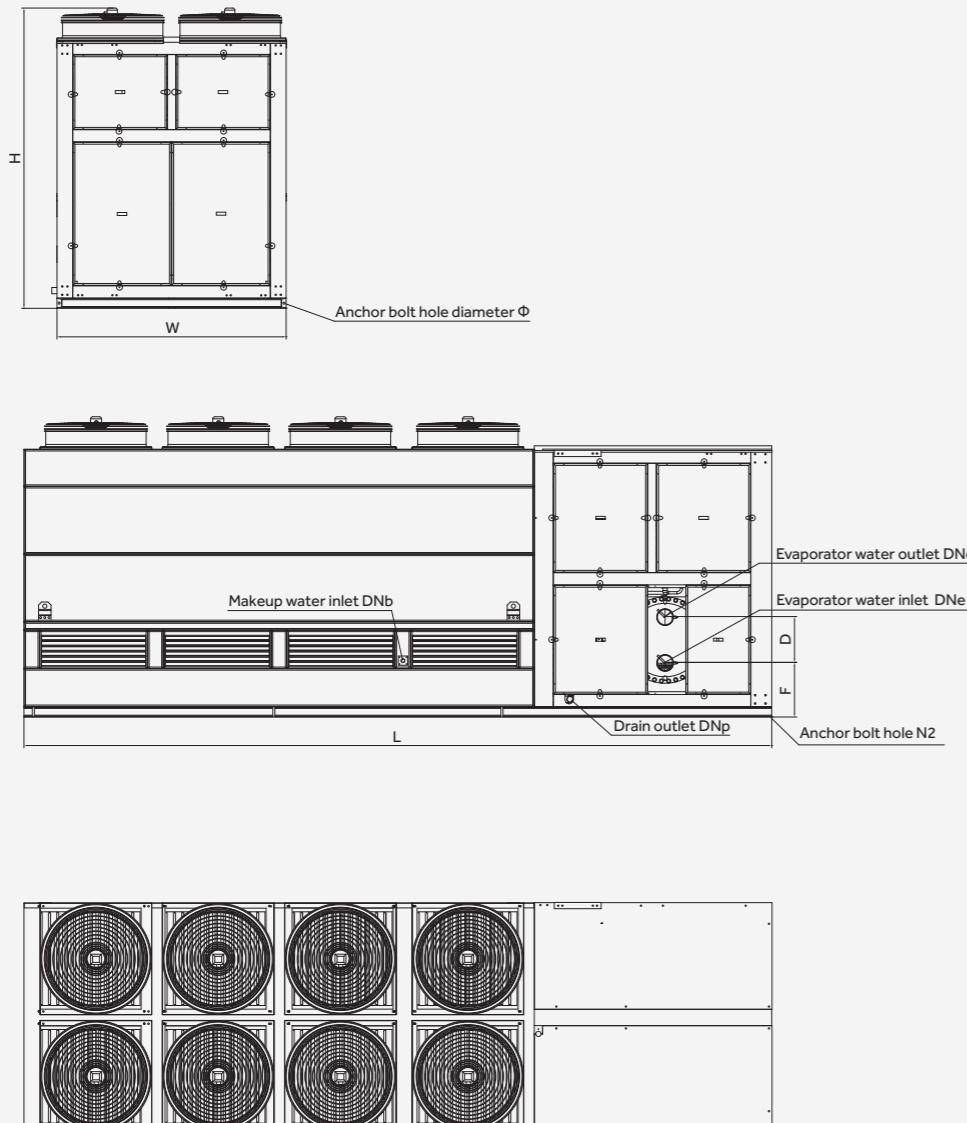


Model	Code			Dimension(mm)			Installation dimensions(mm)			Pipe connection dimension(mm)			Anchor bolt hole diameter		Anchor bolt hole number	
	L	W	H	D	F	DNp	DNe	DNb	DNp	Φ	N2	N1	Φ	N2	N1	
CC0630PENI	7180	2200	2850	440	515	DN50	DN25	DN50		18	6					
CC0700PENI	7880	2200	2850	440	515	DN50	DN25	DN50		18	6					

Installation foundation drawing

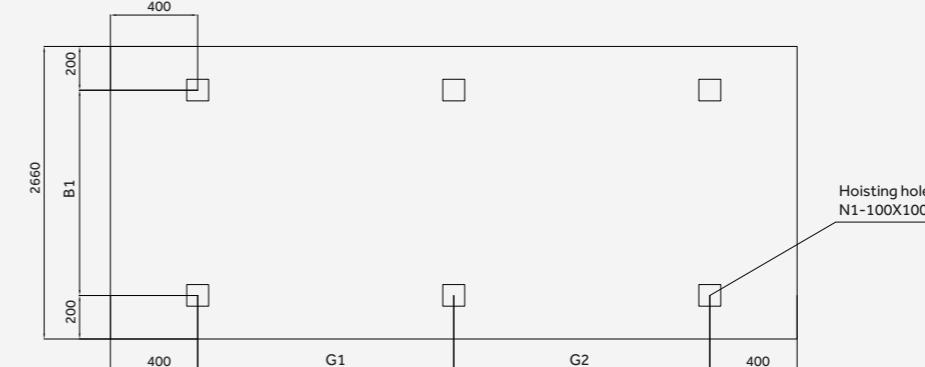

Model	B1 (mm)	G1 (mm)	G2 (mm)	N1
CC0325PENI	2160	2565	2565	6
CC0440PENI	2160	2865	2865	6
CC0530PENI	2160	3165	3165	6
CC0630PENI	2160	3565	3565	6
CC0700PENI	2160	3915	3915	6

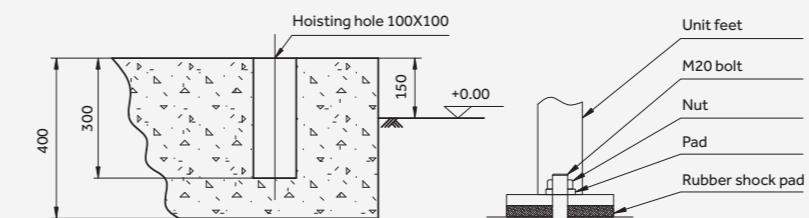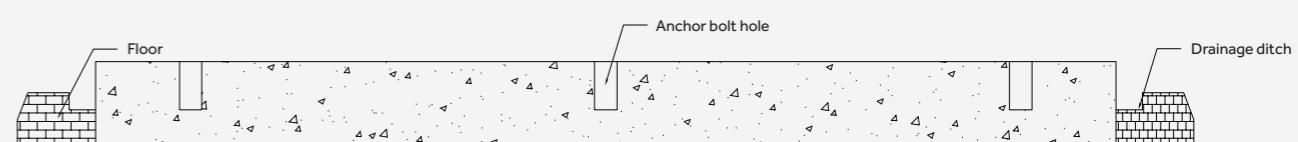


Schematic diagram of reserved square hole of foundation

Note:

- The unit needs to use anchor bolts to fix the unit on the foundation, which should be higher than 350mm on the floor for maintenance and drainage. There should be drainage floor drains around, so as to discharge sewage in the pipeline during the operation of the unit and discharge water when the unit is shut down for maintenance, and the edges of the foundation should be smooth.
- If the machine room is on the floor, the floor shall be strong enough to bear the operating weight of the unit.
- Correct horizontal and longitudinal center lines and horizontal lines and conduct alignment and leveling to ensure that the inclination of the unit after installation shall not exceed 0.5% of the corresponding direction.
- The standard concrete contains 1:2:4 of cement, sand and pebble.

# Dimensions

## Service space requirements

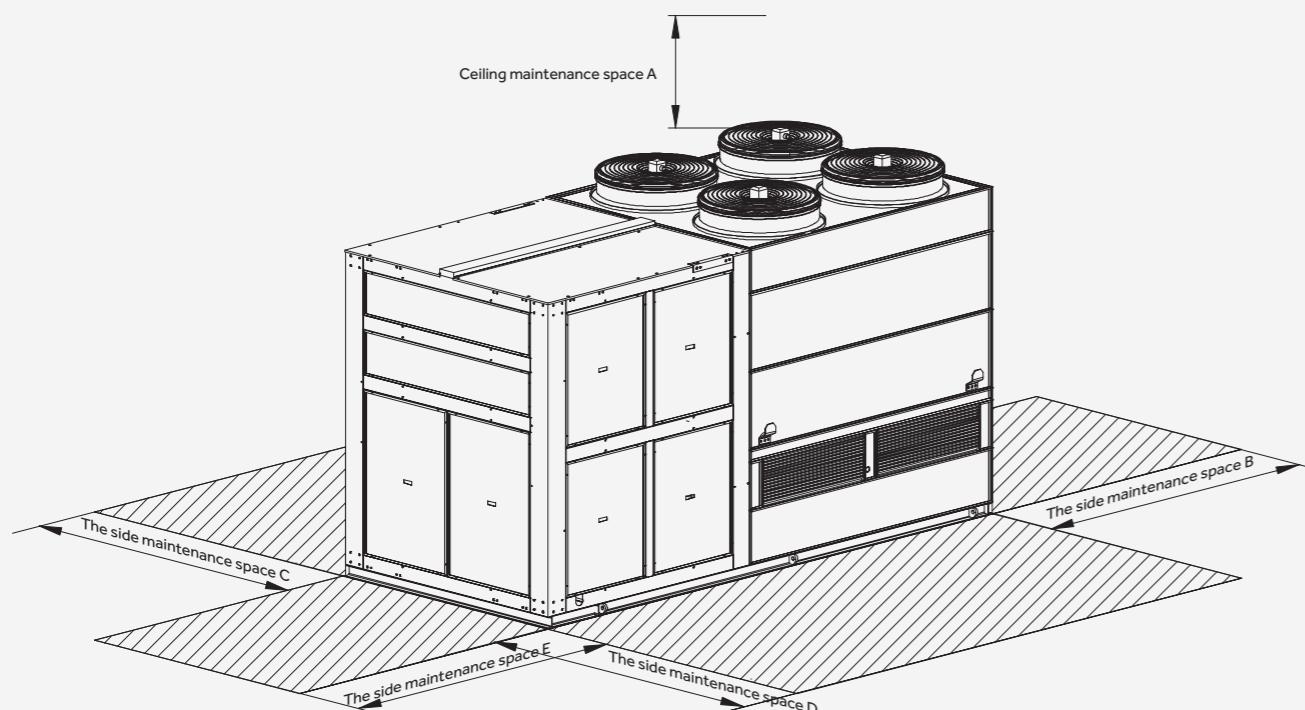

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
CC0325PENI	2000	1500	2000	2000	2000
CC0440PENI	2000	1500	2000	2000	2000
CC0530PENI	2000	1500	2000	2000	2000
CC0630PENI	2000	1500	2000	2000	2000
CC0700PENI	2000	1500	2000	2000	2000

## Water quality management

The poor quality of chilled water and cooling water will not only cause fouling of heat exchanger, affect exchange efficiency and reduce unit performance, but also cause serious failure of heat exchanger. customers should treat water according to GB 50050-2007, code for <design of industrial recirculating cooling water treatment>. soft water shall be used when the chilled water system is a closed system. during the operation of the unit, the cooling water (chilled water of the open system) shall be sampled and analyzed regularly. the water quality needs meet the requirements in the following table. if it fails to meet the requirements, the water quality shall be treated.

In order to ensure the safe operation of the unit, the water source of the unit must not cause corrosion, blockage and other damage. for projects whose water quality fails to meet the requirements of relevant standards, it is suggested that users install secondary heat exchange or conduct corresponding water treatment. if the water quality fails to meet the above requirements, Haier shall not be responsible for the consequences. water quality standards are as follows:

Basic item	Item	Cooling water system		Trend	
		Circulating water	Makeup water	Corrosion	Scaling
	pH(25°C)		6.5~8.2	6.5~8.0	○ ○
	Conductance(25°C)	(Ms/m)	< 80	< 30	○ ○
	Cl <sup>-</sup>	mgCl <sup>-</sup> /L	< 200	< 50	○ -
	SO <sub>4</sub> <sup>2-</sup>	mgSO <sub>4</sub> <sup>2-</sup> /L			○ -
	Acid consumption(pH4.8)	mgCaCO <sub>3</sub> /L	< 100	< 70	- ○
	Total hardness	mgCaCO <sub>3</sub> /L	< 200		- ○
	Calcium hardness	mgCaCO <sub>3</sub> /L	< 150	< 50	- ○
	Ionic Silica	mgSiO <sub>2</sub> /L	< 50	< 30	- ○
Reference items	Fe	mgFe/L	< 1.0	< 0.3	○ ○
	Cu	mgCu/L	< 0.3	< 0.1	○ -
	S <sup>2-</sup>	mgS <sup>2-</sup> /L	Undetectable	Undetectable	○ -
	NH4+	mgNH4+/L	< 1.0	< 0.1	○ -
	Residuum	mgCl <sup>-</sup> /L	< 0.3	< 0.3	○ -
	Free carbonic acid	mgCO <sub>2</sub> /L	< 0.4	< 0.4	○ -
	Stability index		6.0~7.0	-	○ ○
	Bacterial count	cfu/ml	< 10000	< 10000	- ○

"○":There are trends. "-":There is no trend.

Note:

- 1.Total hardness of water (mgCaCO<sub>3</sub>/L)
- 2.Water hardness<150, the water quality is good. Set magnetized deduster in the cooling water circulation pipeline.
- 3.150<Water hardness<300, the water quality is general. Design the first level of softening water treatment in the makeup water pipeline, and set magnetized deduster in the cooling water circulation pipeline.
- 4.300<Water hardness<600, the water quality is of high hardness. Design the second level of softening water treatment in the makeup water pipeline, and set magnetized deduster in the cooling water circulation pipeline.
- 5.600<Water hardness, the water quality hardness is very high. Design the multilevel of softening water treatment in the makeup water pipeline, and set magnetized deduster in the cooling water circulation pipeline.

# CENTRIFUGAL CHILLER



**076** Water-cooled  
Centrifugal Chiller



# Water-cooled Centrifugal Chiller





## Nomenclature

**C N W P 2460 M F N EA CA E 1**

Chiller	Design serial number
Centrifugal compressor	Economizer: E-With;N-Without
Cooling type: W-Water-cooled	Condenser type
Refrigerant: P-R134a	Evaporator type: E-Flooded; F-Falling film Type:A,B.....
Cooling capacity,kW	Power supply: N-3Ph/380V/50Hz
Structure: M-Multi circuit S-Single circuit	Compressor type: F-Fixed-speed



## Unit Feature

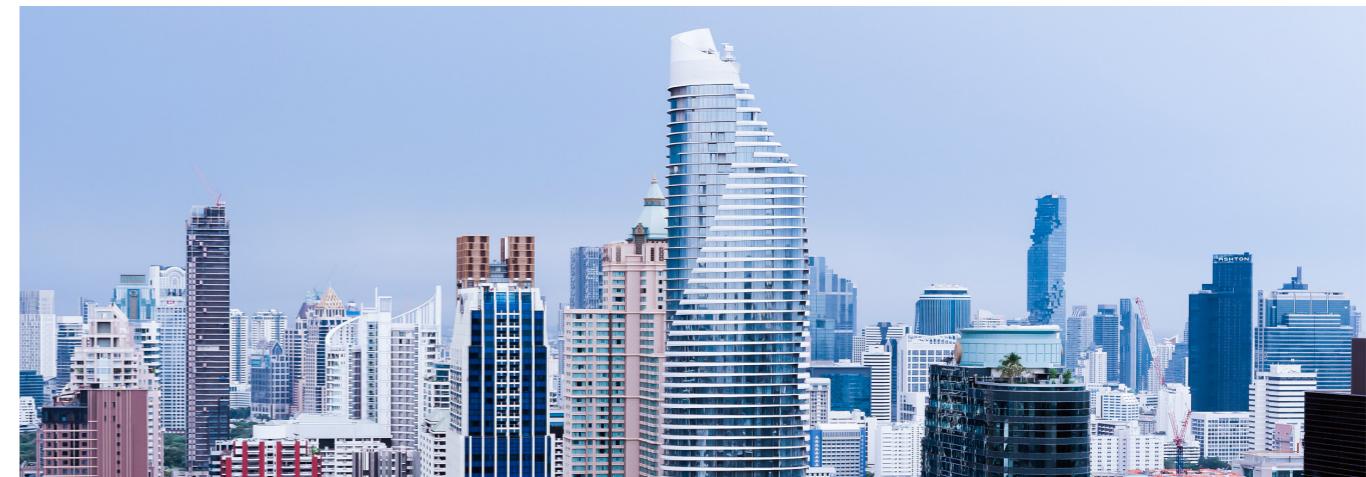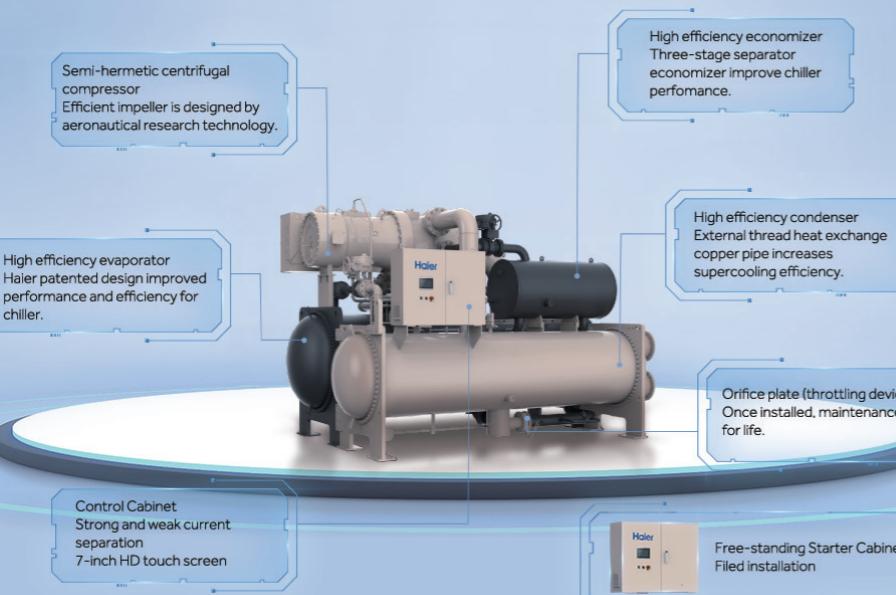

## High Efficiency

Aerospace pneumatic technology, energy efficiency increased by 2%


Aerospace pneumatic technology, new ternary flow high-efficiency aluminum closed impeller and pneumatic runner design, aerodynamic efficiency > 88%. Full channel CFD flow field simulation optimization design, energy efficiency increased by 2%.

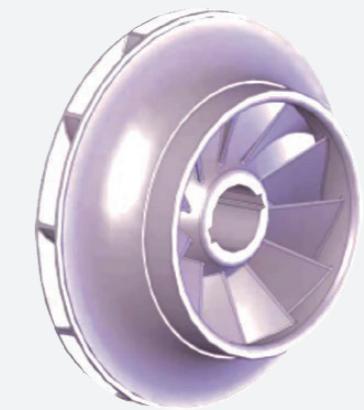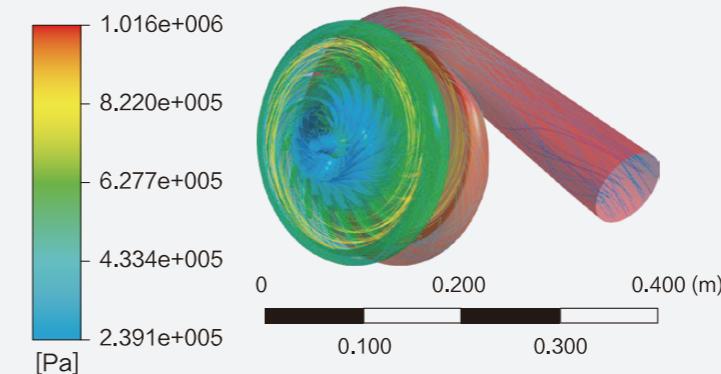

## Two-stage compressor & energy efficiency increased by 5%

Efficient two-stage air replenishing and enthalpy increasing compressor technology, cooling capacity increased by 5%~10%.

With three-stage separator economy, the system is stable and reliable, and the energy efficiency of the unit is increased by 7%.

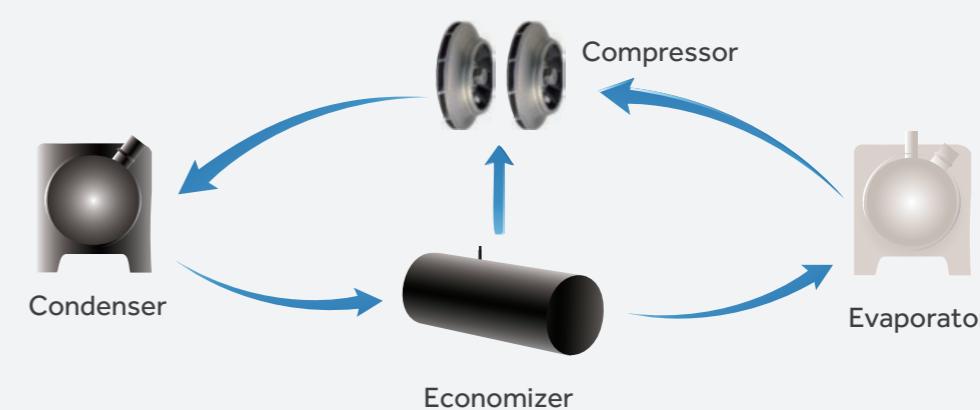

## Heat exchanger patented technology, performance increased by 5%

Evaporator: internal homogenizer patented design, ensure the uniformity of refrigerant distribution, strengthen the refrigerant convection disturbance; At the same time, the special tube layout technology is used to optimize the spacing of evaporation tubes, which effectively improves the heat transfer efficiency.



Condenser: The external thread of the heat exchange tube adopts the latest needle-like design, and the wave film is thinner and the thermal resistance is reduced. The special arrangement structure for group condensation of heat exchange tube is optimized by using special tube distribution technology to improve heat transfer efficiency.



## Inverter centrifugal chiller: built-in inverter panel

Leading inverter technology, advanced control system, stable temperature control, effectively avoid energy waste, year-round operation can save energy 30%.



## High Reliability

### Semi-hermetic motor, stable performance

Compressor adopts semi-hermetic high-efficiency motor, which has compact design with the benefit of light weight, low noise. And there is no need shaft seal, which avoid the leakage of refrigerant and oil.

The motor use spray cooling with refrigerant, the operating temperature is lower, and the efficiency is higher. The chiller plant needs just conventional ventilation, which greatly saves the equipment investment cost.



### High strength ball bearing, more reliable operation

Low friction resistance bearing, and gear increase drive reduce transmission losses by 2%



Low resistance bearings and gears

## Anti-surge technology, three-grade safety protection

Intelligent anti-surge technology: prevention + control + alarm, chiller has multiple measures to prevent surge, and with hot gas bypass to ensure the stable operation of the chiller.

The anti-surge balancing valve can adjust the compressor pressure ratio quickly, protect the compressor effectively, and extend the service life of the compressor.



### Prevention

By accurate calculation of the surge curve, the chiller automatically adjusts its operating state when it is approaching the surge curve.




### Control

Adjust the operating state in time when the chiller surges are detected, prevent the surge effectively.




### Alarm

When there is surge, the chiller will alarm and shutdown.

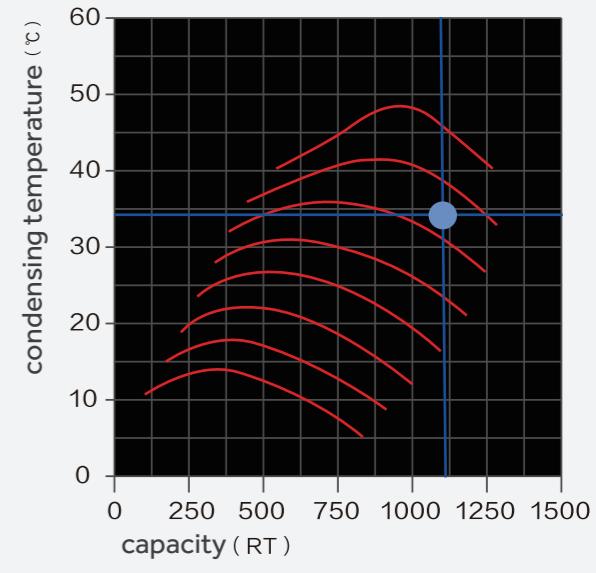

## Leading oil return technology, built-in oil-separator, sustainable security

The chiller adopts the leading oil return technology; the compressor built-in oil-separator reduce the amount of oil in the system. By sight glass, the effect of oil return is visible.

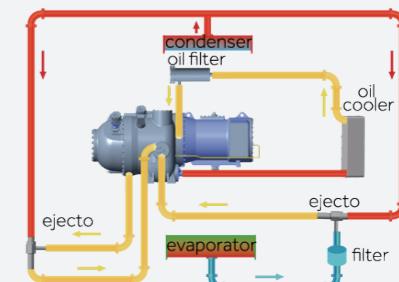

## Multiple electrical protection, more reliable operation


The chiller is equipped with unmounted start cabinet, main circuit breaker with shunt trip, three-phase current imbalance protection etc., which greatly improves the operation reliability of the chiller.

Soft stop function - When the chiller receives the stop instruction, it turns off the guide vane firstly, then the electric current reaches to the preset value the motor shutdown. The soft stop function extends the service life of the compressor effectively.




## Efficient and reliable throttling technology, auto self-adjusting at various working conditions

Orifice plates can adaptively adjust, no need control and free of maintenance.

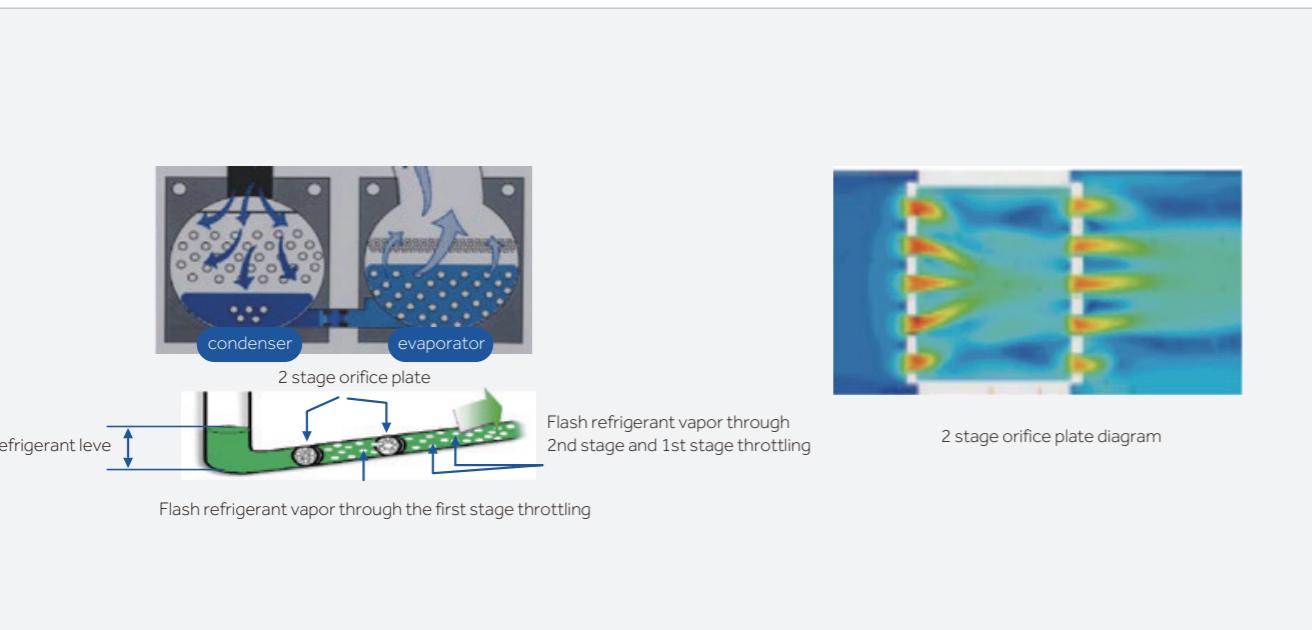

## Up to 30 protection features

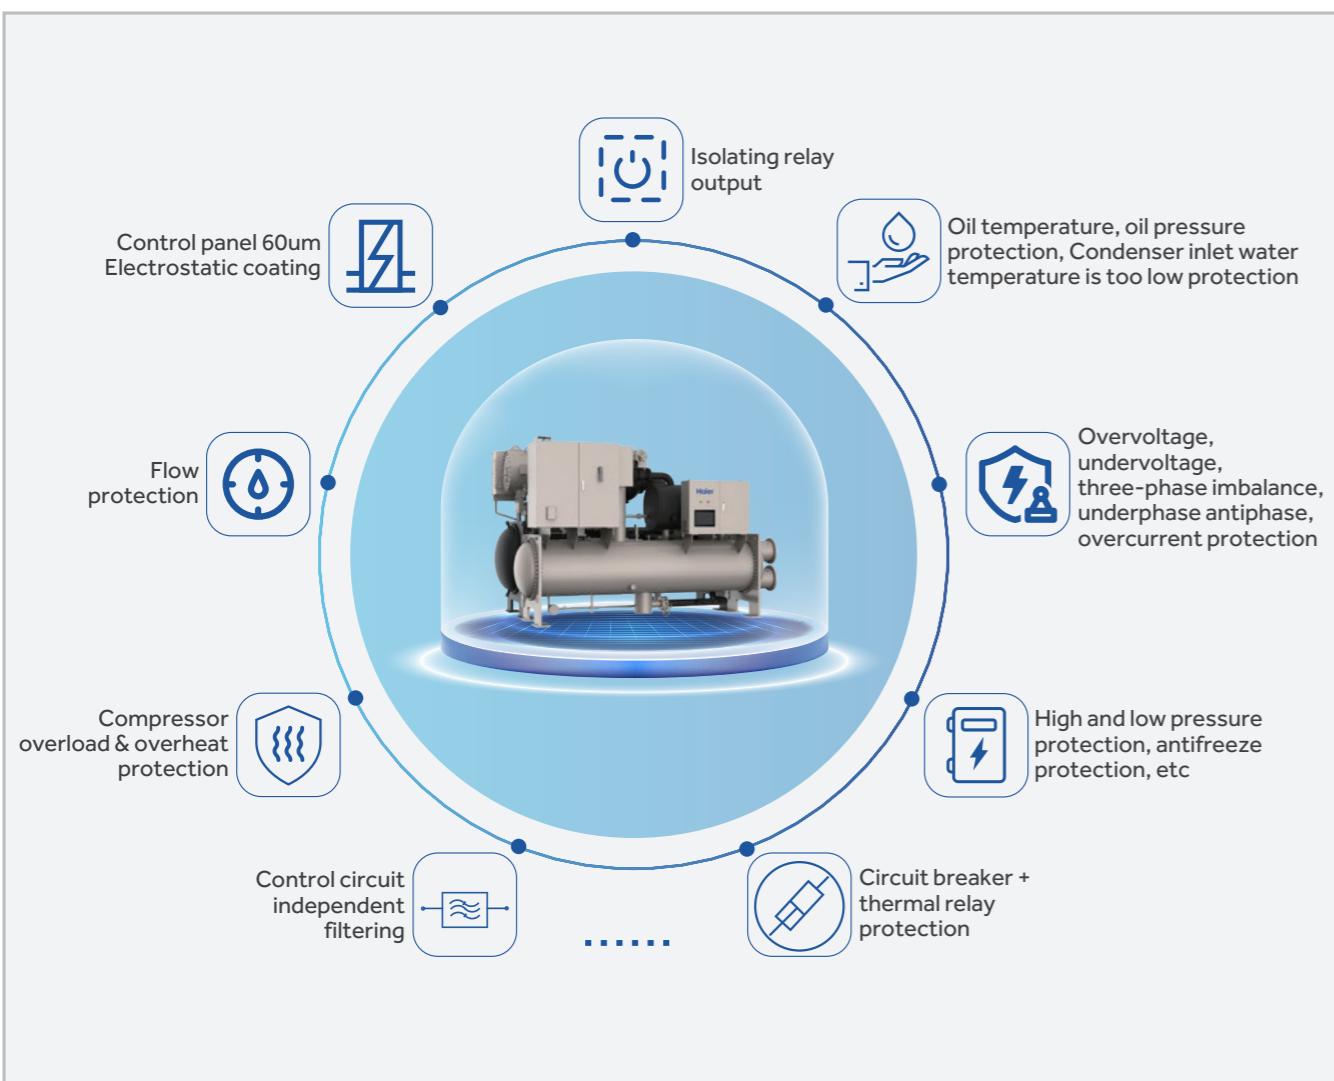

## Convenient

### Industrial high reliability touch screen

High-speed CortexA8 core processor, 600MHz main frequency, 128MB memory, running fast.

Touch screen - controller network port communication, strong anti-interference, high communication reliability.

The parameters of the unit operation are detected in real time, and accumulated and graphically.



## Dedicated UI

The interface layout is reasonable, simple and easy to use.

Equipped with operation animation and data dynamic display, chiller operation status at a glance, enhance user experience.


Touch screen interface English language switching, free operation.



## Function setting perfect safe and reliable

Three levels of account management: user rights, maintenance rights, manufacturer rights. Password access, exclusive rights, safe and assured.

Timing function: The user can set the timing function according to the requirements, to achieve unattended unit, energy saving operation.

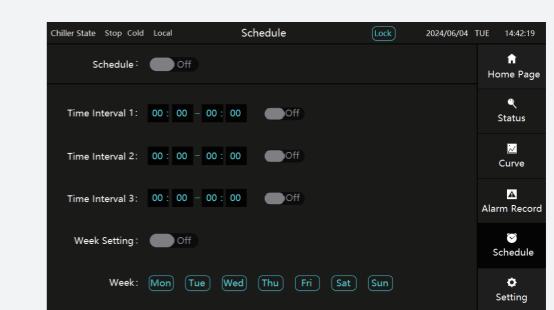

# Water-cooled Centrifugal Chiller (Fixed Frequency)

AHRI CERTIFIED®  
www.ahridirectory.org




MODEL		CNWP2290 MFNEACAE1	CNWP2460 MFNEACAE1	CNWP2640 MFNEACAE1		CNWP2810 MFNEACAE1	CNWP2990 MFNEACAE1	CNWP3170 MFNEACAE1	CNWP3340 MFNEACAE1	CNWP3520 MFNEACAE1	CNWP3870 MFNEACAE1	CNWP4220 MFNEACAE1										
Cooling capacity	Ton	650	700	750		800	850	900	950	1000	1100	1200										
	kW	2286	2462	2638		2814	2989	3165	3341	3517	3869	4220										
Power input	kW	346.2	372.8	399.1		423.1	448.8	483.3	510.8	531.4	583.5	635.3										
COP	kW/kW	6.60	6.60	6.61		6.65	6.66	6.55	6.54	6.62	6.63	6.64										
Compressor	Type	—	Semi-Hermetic centrifugal compressor																			
	Quantity	EA	1																			
Power supply	—	3~/380V /50Hz																				
Starting mode	—	Y-△																				
Starting current	A	1491	1491	1698		1698	1698	1967	1967	2153	2567	2567										
Switching current	A	3327	3327	3789		3789	3789	4389	4389	4805	5729	5729										
Max. running current	A	811	811	936		936	936	1078	1078	1179	1401	1401										
Max. power input	kW	466	466	544		544	544	643	643	710	815	815										
Capacity control	—	30-100%																				
Controller type	—	PLC																				
Refrigerant throttle type	—	Orifice plate																				
Refrigerant	Type	—	R134a																			
	Charge	kg	780	780	780		940	940	1050	1050	1150	1300	1360									
	Type	—	Flooded type																			
Evaporator	Chilled water inlet/outlet temp.	°C	12 / 7																			
	Rated water flow	m³/h	393	423	454		484	514	544	575	605	665	726									
	Water side pressure drop	kPa	78	78	78		71	78	74	81	75	75	76									
	Connection size	DN	250	250	250		300	300	300	300	300	350	350									
	Fouling factor	m²•°C/kW	0.018																			
	Pass	—	2																			
	Standard pressure	MPa	1.0																			
Condenser	Type	—	Shell&tube heat exchanger																			
	Cooling water inlet/outlet temp.	°C	30 / 35																			
	Rated water flow	m³/h	453	488	522		557	591	628	663	696	766	835									
	Water side pressure drop	kPa	69	71	69		67	72	69	74	70	70	72									
	Connection size	DN	250	250	250		300	300	300	300	300	350	350									
	Fouling factor	m²•°C/kW	0.044																			
	Pass	—	2																			
External dimension	Standard pressure	MPa	1.0																			
	Chiller length	mm	4300	4300	4400		4400	4400	4400	4400	4450	4450										
	Chiller width	mm	2110	2110	2350		2350	2350	2350	2350	2550	2550										
	Chiller height	mm	2550	2550	2850		2850	2850	2850	2850	2950	2950										
Weight	Net weight	kg	10300	10500	12700		13000	13000	13500	13500	14000	15200	15500									
	Gross weight	kg	10500	10700	12900		13200	13200	13700	13700	14200	15400	15700									
	Operation weight	kg	11600	11800	14200		14500	14500	15200	15200	15800	17400	17700									

Note:

1.Except above standard models.Haier can be customized non-standard products according to customer requirements.

2.Due to our policy of innovation some specifications maybe changed without notification.

# Dimensions

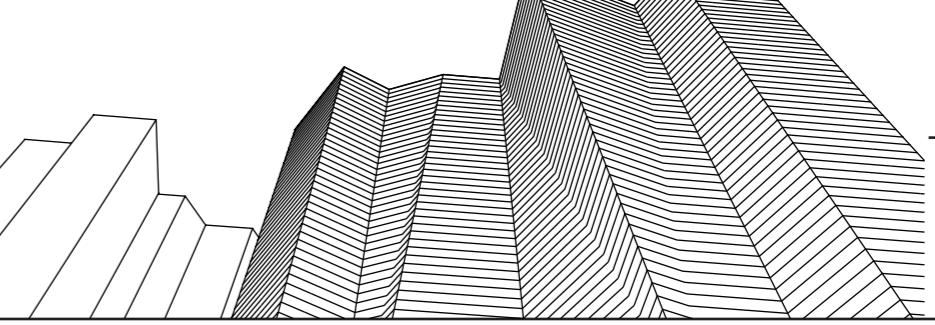

**Outline dimension**

Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)					
		L	W	H	B	G	D1	D2	F1	F2	M	DNe
CNWP2290MFNEACAE1	4300	2110	2550	1805	3300	500	410	595	540	1105	DN250	DN250
CNWP2460MFNEACAE1	4300	2110	2550	1805	3300	500	410	595	540	1105	DN250	DN250
CNWP2640MFNEACAE1	4400	2350	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP2810MFNEACAE1	4400	2350	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP2990MFNEACAE1	4400	2350	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3170MFNEACAE1	4400	2350	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3340MFNEACAE1	4400	2350	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3520MFNEACAE1	4400	2350	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3870MFNEACAE1	4450	2550	2950	2205	3300	600	500	645	595	1305	DN350	DN350
CNWP4220MFNEACAE1	4450	2550	2950	2205	3300	600	500	645	595	1305	DN350	DN350


\*1 Please acquire detailed dimensions from Haier technicians.  
2 Free-standing Starter Cabinet need field installation.  
3 Starter dimension and detailed wiring instruction please contact Haier technicians.


**Installation foundation drawing**

Model	CODE	Reserved Space Dimension mm				
		A	B	C	D	E
CNWP2290MFNEACAE1		1200	3500	1500	1500	2000
CNWP2460MFNEACAE1		1200	3500	1500	1500	2000
CNWP2640MFNEACAE1		1200	3500	1500	1500	2000
CNWP2810MFNEACAE1		1200	3500	1500	1500	2000
CNWP2990MFNEACAE1		1200	3500	1500	1500	2000
CNWP3170MFNEACAE1		1200	3500	1500	1500	2000
CNWP3340MFNEACAE1		1200	3500	1500	1500	2000
CNWP3520MFNEACAE1		1200	3500	1500	1500	2000
CNWP3870MFNEACAE1		1200	3500	1500	1500	2000
CNWP4220MFNEACAE1		1200	3500	1500	1500	2000

**Installation Dimension mm**

Model	CODE	A	B	C	D
		3300	1805	3800	2205
CNWP2290MFNEACAE1		3300	1805	3800	2205
CNWP2460MFNEACAE1		3300	1805	3800	2205
CNWP2640MFNEACAE1		3300	2000	3800	2400
CNWP2810MFNEACAE1		3300	2000	3800	2400
CNWP2990MFNEACAE1		3300	2000	3800	2400
CNWP3170MFNEACAE1		3300	2000	3800	2400
CNWP3340MFNEACAE1		3300	2000	3800	2400
CNWP3520MFNEACAE1		3300	2000	3800	2400
CNWP3870MFNEACAE1		3300	2205	3800	2605
CNWP4220MFNEACAE1		3300	2205	3800	2605

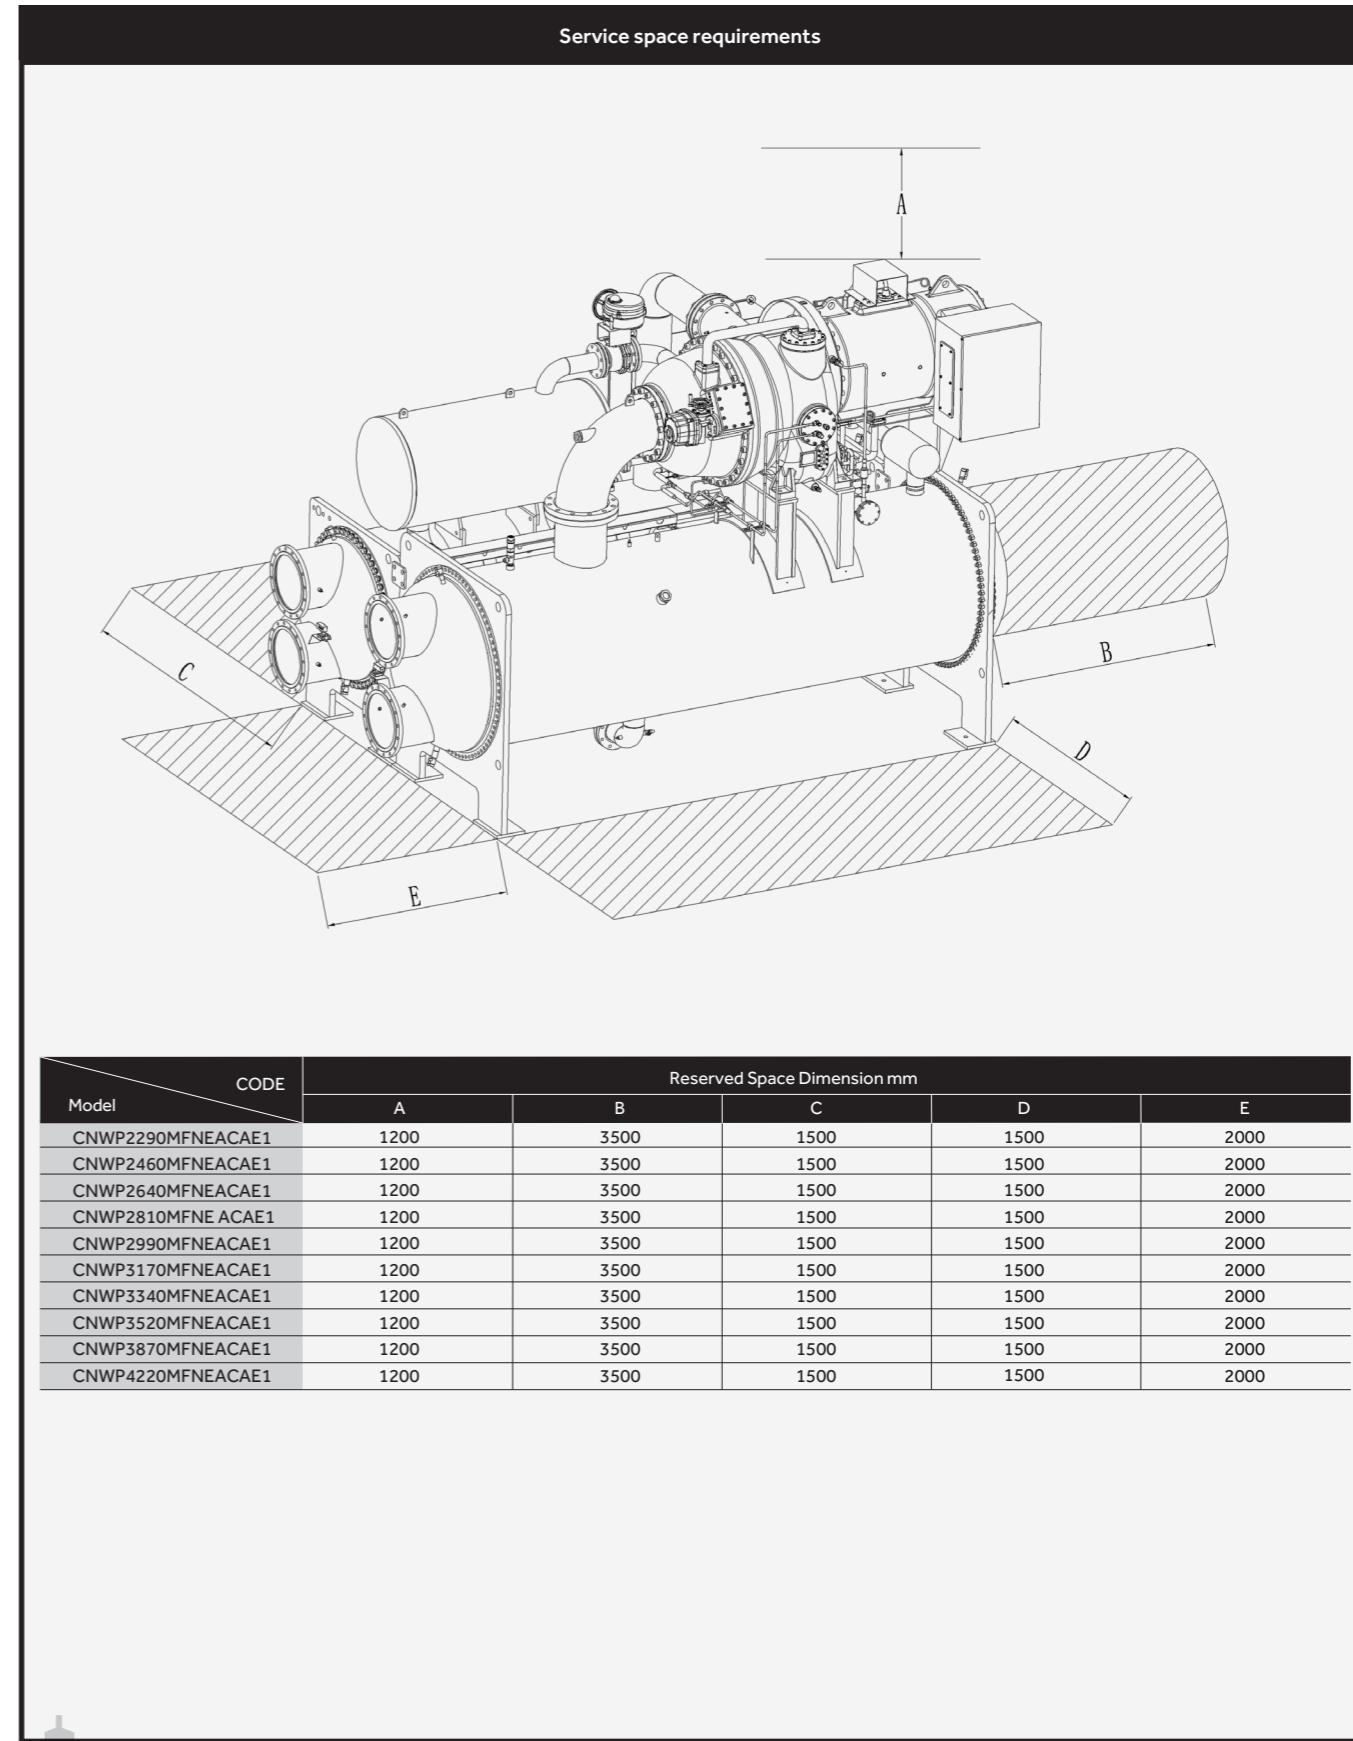

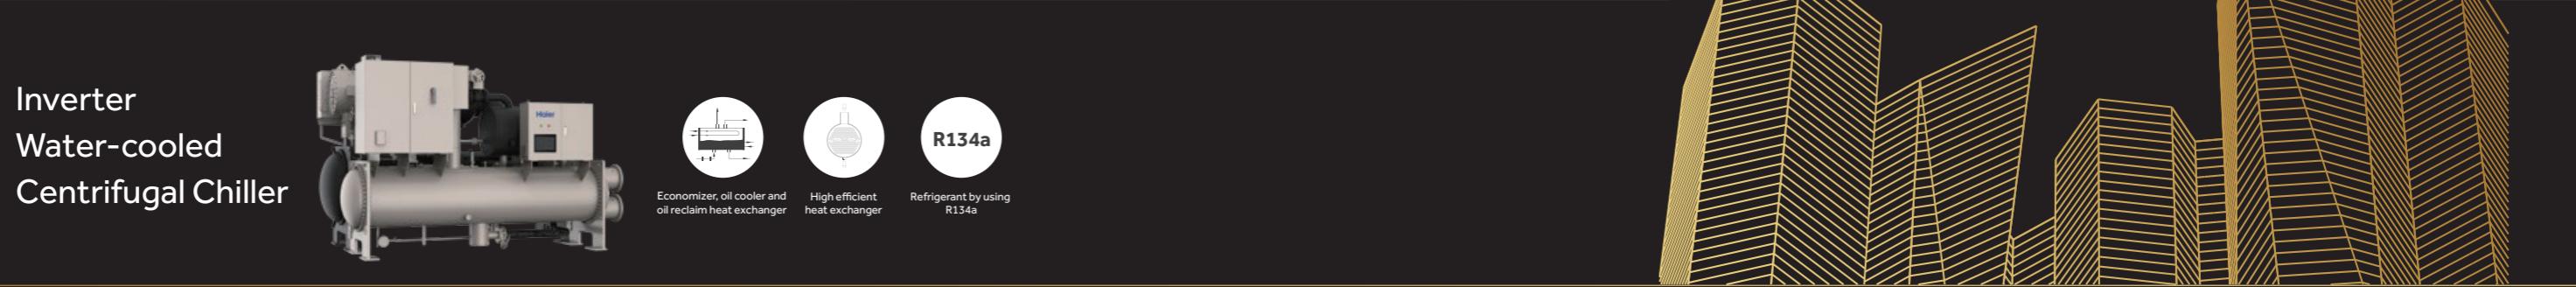

## Inverter Water-cooled Centrifugal Chiller




MODEL		CNWP2110MIN EACAE1	CNWP2290MIN EACAE1	CNWP2460MIN EACAE1		CNWP2640MIN EACAE1	CNWP2810MIN EACAE1	CNWP3170MIN EACAE1	CNWP3520MIN EACAE1	CNWP3870MIN EACAE1	CNWP4220MIN EACAE1	CNWP4570MIN EACAE1	
Cooling capacity	RT	600	650	700		750	800	900	1000	1100	1200	1300	
	kW	2110	2286	2462		2638	2814	3165	3517	3869	4220	4572	
Power input	kW	321.2	347.4	371.9		400.3	427.6	475.3	530.5	575.7	632.7	688.6	
COP	kW/kW	6.57	6.58	6.62		6.59	6.58	6.66	6.63	6.72	6.67	6.64	
Compressor	Type	—	Semi-Hermetic centrifugal compressor										
	Quantity	EA	1										
Power supply	—	3~.380V .50Hz											
Starting mode	—	VSD											
Starting current	A	606	606	704		704	801	801	928	1016	1186	1186	
Max. running current	A	760	760	811		811	936	936	1078	1179	1401	1401	
Max. power input	kW	411	411	466		466	544	544	643	710	815	815	
Capacity control	—	PLC											
Controller type	—	VSD & IGV											
Refrigerant throttle type	—	Orifice plate											
Refrigerant	Type	—	R134a										
	Charge	kg	500	500	600		600	780	880	900	1000	1050	1100
Evaporator	Type	—	Flooded type										
	Entering/Leaving water temp.	°C	12 / 7										
	Rated water flow	m³/h	363	393	423		454	484	544	605	665	726	786
	Water side pressure Drop	KPa	87	87	87		87	86	85	87	86	85	86
	Connection Size	DN	250	250	250		250	300	300	300	300	350	350
	Fouling Factor	m²•°C/kW	0.018										
	Pass	—	2										
	Standard pressure	MPa	1										
Condenser	Type	—	Shell&tube heat exchanger										
	Entering/Leaving water temp.	°C	30 / 35										
	Rated water flow	m³/h	418	453	487		523	557	626	696	764	835	905
	Water side pressure Drop	KPa	84	86	84		86	83	87	88	88	87	89
	Connection Size	DN	250	250	250		300	300	300	300	300	350	350
	Fouling Factor	m²•°C/kW	0.044										
	Pass	—	2										
	Standard pressure	MPa	1.0										
External dimension	Chiller length	mm	4200	4200	4300		4300	4400	4400	4400	4400	4450	4450
	Chiller width	mm	2270	2270	2330		2330	2470	2470	2470	2470	2680	2680
	Chiller height	mm	2570	2570	2570		2570	2850	2850	2850	2850	2950	2950
Weight	Net weight	kg	10100	10300	10500		10700	12900	13200	13800	14300	15500	15800
	Gross weight	kg	10300	10500	10700		10900	13100	13400	14000	14500	15700	16000
	Operation weight	kg	11300	11600	11800		12000	14400	14700	15500	16100	17700	18000

Note:


1. Except above standard models, Haier can be customized non-standard products according to customer requirements.

2. Due to our policy of innovation some specifications maybe changed without notification.

# Dimensions

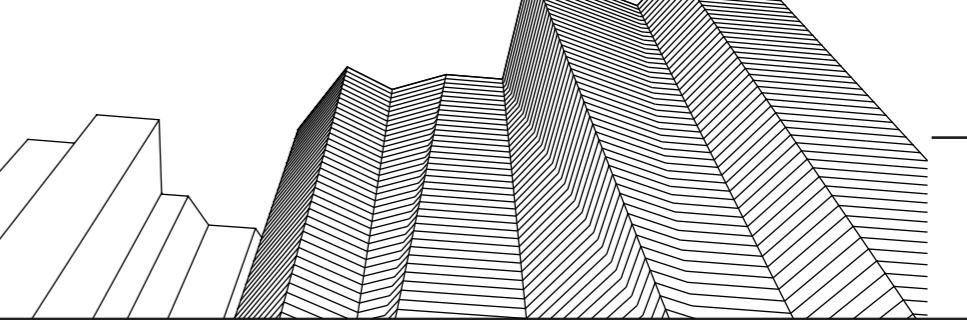

Outline dimension

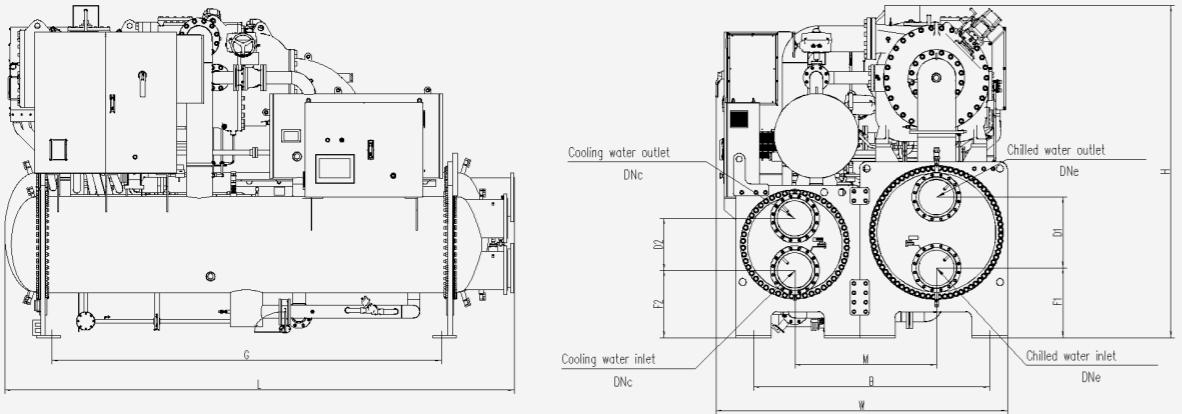


Model	Code	Boundary Dimensions(mm)			Installation Dimensions(mm)			Nozzle Dimensions(mm)					
		L	W	H	B	G	D1	D2	F1	F2	M	DNe	DNs
CNWP2110MINEACAE1		4200	2270	2570	1705	3300	450	410	595	540	1055	DN250	DN250
CNWP2290MINEACAE1		4200	2270	2570	1705	3300	450	410	595	540	1055	DN250	DN250
CNWP2460MINEACAE1		4300	2330	2570	1805	3300	500	410	595	540	1105	DN250	DN250
CNWP2640MINEACAE1		4300	2330	2570	1805	3300	500	410	595	540	1105	DN250	DN250
CNWP2810MINEACAE1		4400	2470	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3170MINEACAE1		4400	2470	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3520MINEACAE1		4400	2470	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP3870MINEACAE1		4400	2470	2850	2000	3300	600	440	590	570	1200	DN300	DN300
CNWP4220MINEACAE1		4450	2680	2950	2205	3300	600	500	645	595	1305	DN350	DN350
CNWP4570MINEACAE1		4450	2680	2950	2205	3300	600	500	645	595	1305	DN350	DN350

\*1 Please acquire detailed dimensions from Haier technicians.


2 Free-standing Starter Cabinet need field installation.

3 Starter dimension and detailed wiring instruction please contact Haier technicians.

Service space requirements

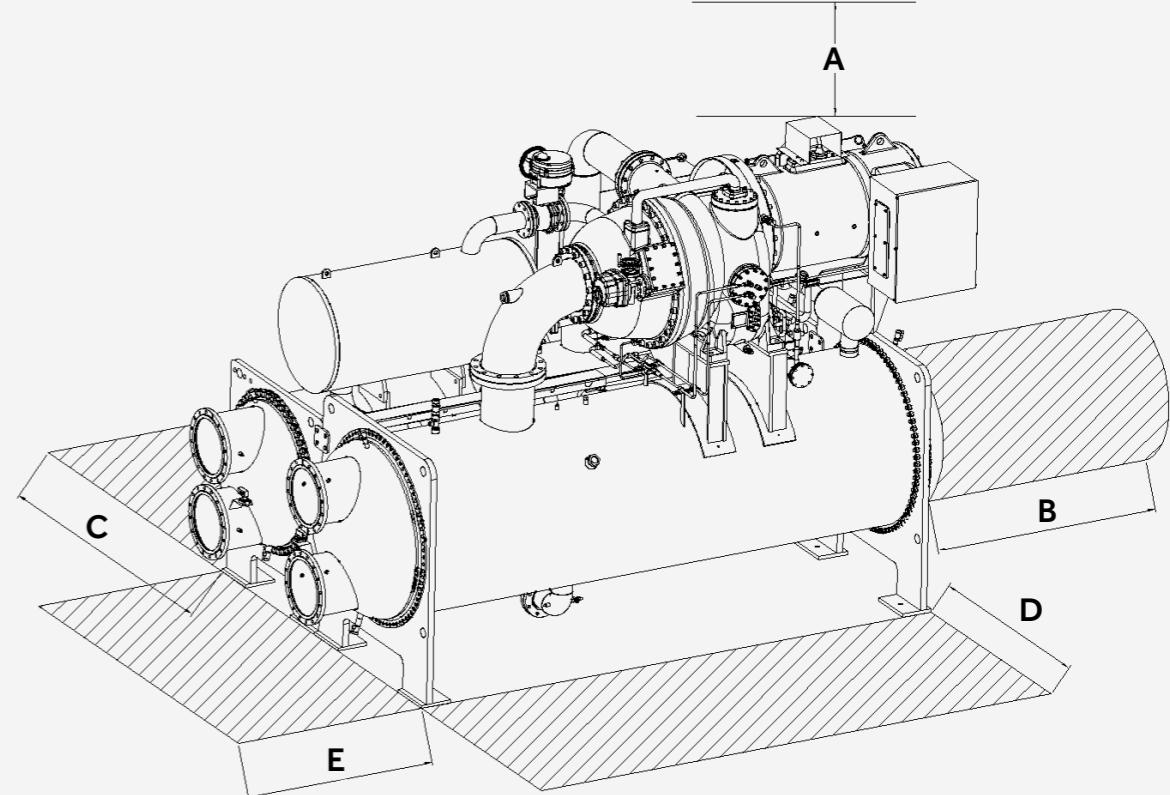

Installation foundation drawing

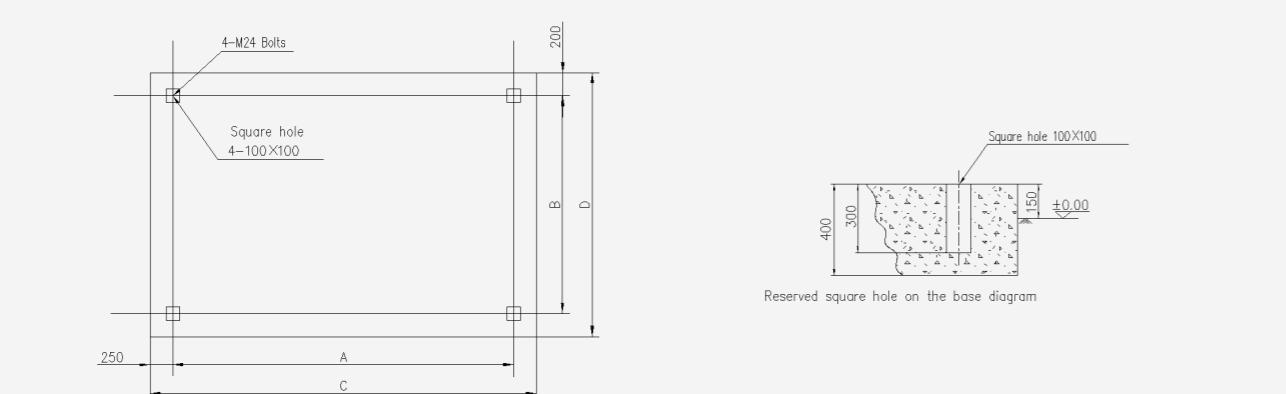

Model	CODE	Reserved Space Dimension mm				
		A	B	C	D	E
CNWP2110MINEACAE1		1200	3500	1500	1500	2000
CNWP2290MINEACAE1		1200	3500	1500	1500	2000
CNWP2460MINEACAE1		1200	3500	1500	1500	2000
CNWP2640MINEACAE1		1200	3500	1500	1500	2000
CNWP2810MINEACAE1		1200	3500	1500	1500	2000
CNWP3170MINEACAE1		1200	3500	1500	1500	2000
CNWP3520MINEACAE1		1200	3500	1500	1500	2000
CNWP3870MINEACAE1		1200	3500	1500	1500	2000
CNWP4220MINEACAE1		1200	3500	1500	1500	2000
CNWP4570MINEACAE1		1200	3500	1500	1500	2000

Model	CODE	Installation Dimension mm			
		A	B	C	D
CNWP2110MINEACAE1		3300	1705	3800	2105
CNWP2290MINEACAE1		3300	1705	3800	2105
CNWP2460MINEACAE1		3300	1805	3800	2205
CNWP2640MINEACAE1		3300	1805	3800	2205
CNWP2810MINEACAE1		3300	2000	3800	2400
CNWP3170MINEACAE1		3300	2000	3800	2400
CNWP3520MINEACAE1		3300	2000	3800	2400
CNWP3870MINEACAE1		3300	2000	3800	2400
CNWP4220MINEACAE1		3300	2205	3800	2605
CNWP4570MINEACAE1		3300	2205	3800	2605

# SCREW CHILLER



**092** Water-cooled Screw Chiller


**106** Air-cooled Screw Chiller



## Water-cooled Screw Chiller



## ☒ Nomenclature

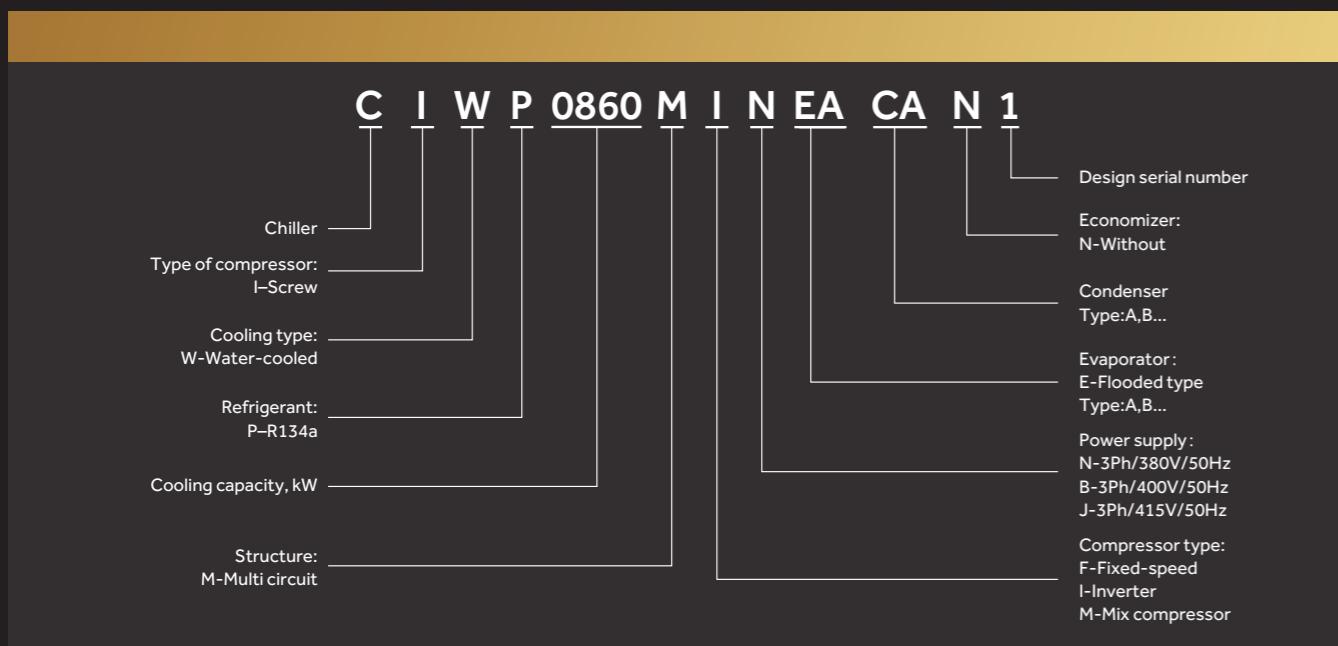


## ☒ Convenient

- One-touch start/stop - automatic operation
- Countdown timer - easy to operate, easy to see, less waiting
- Timer function - unattended, increase efficiency
- Intelligent memory function: abnormal unit operation fault memory storage, easy for manual investigation and processing
- Self-applicable control function: the unit monitors the changes of each parameter in real time
- Automatic adjustment of operating status for continuous safe operation
- Scaling cleaning tips - automatic judgement, intelligent operation and maintenance




## Humanized design of the human-machine interface

7-inch colour touch screen Real-time display of parameters, easy to operate and easy to understand.

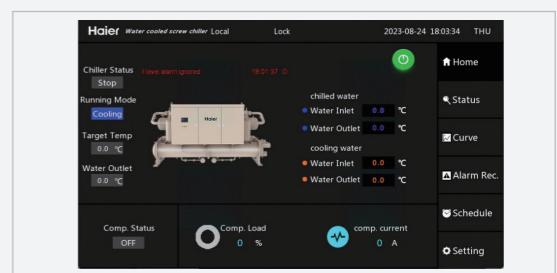


## ☒ Intelligent

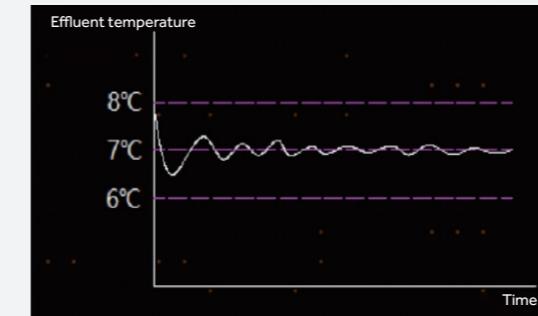

PID control water outlet temperature curve

## PID automatic adjustment

According to the trend of water temperature change combined with PID adjustment, automatically adjust the energy state of the unit, the water temperature fluctuation is small.

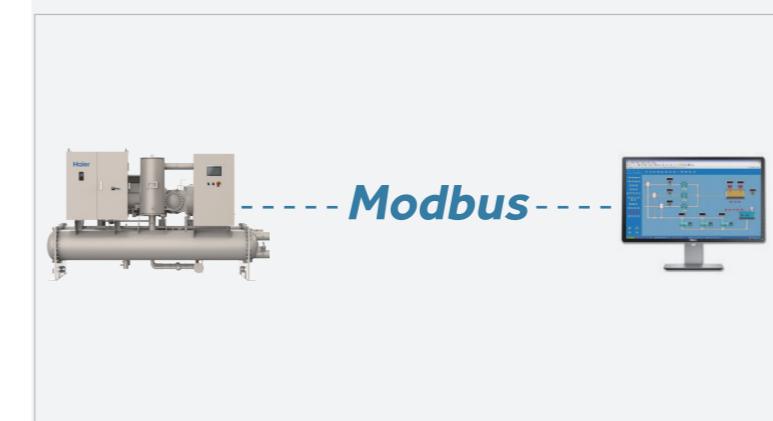

Modbus

- With Modbus communication protocol, RS-485 communication interface reserved.
- Users have a need for centralised control and hosts can be used without increasing their budget Access to a group control system for remote management.

# High Efficiency


## Single screw compressor

Symmetrical arrangement, uniform forces, low vibration, low noise and high performance.




## Flooded type evaporator

Using high efficiency heat exchanger tubes.

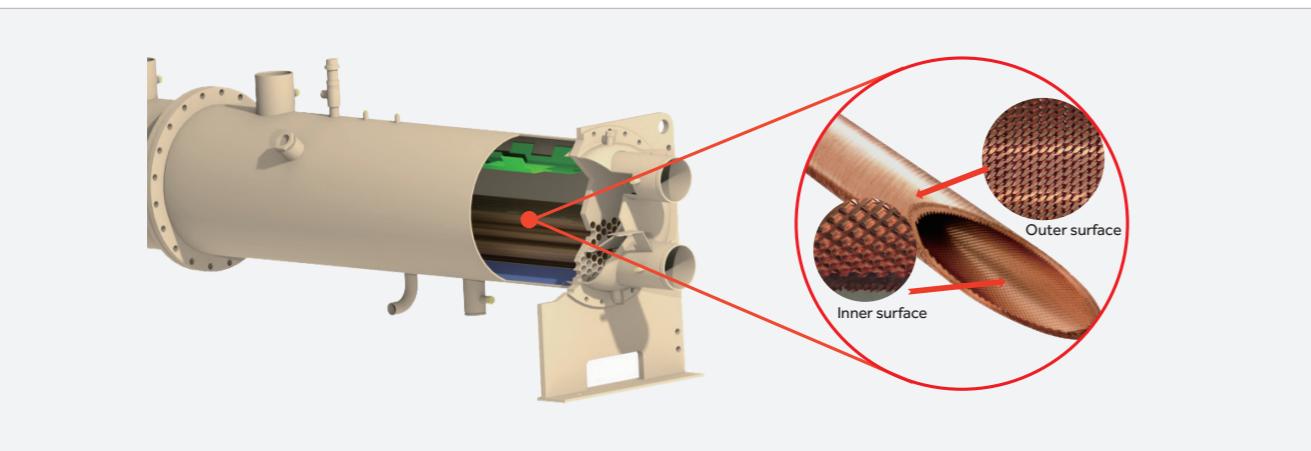

## Variable frequency adjustment


The water-cooled screw unit comes with an energy-saving control button. When the user selects the energy-saving operation status, the unit can calculate and output the most energy-saving operation parameters according to the external environment and automatically adjust the unit's operation status in combination with the advanced variable frequency energy adjustment technology system to achieve the most energy-saving operation.

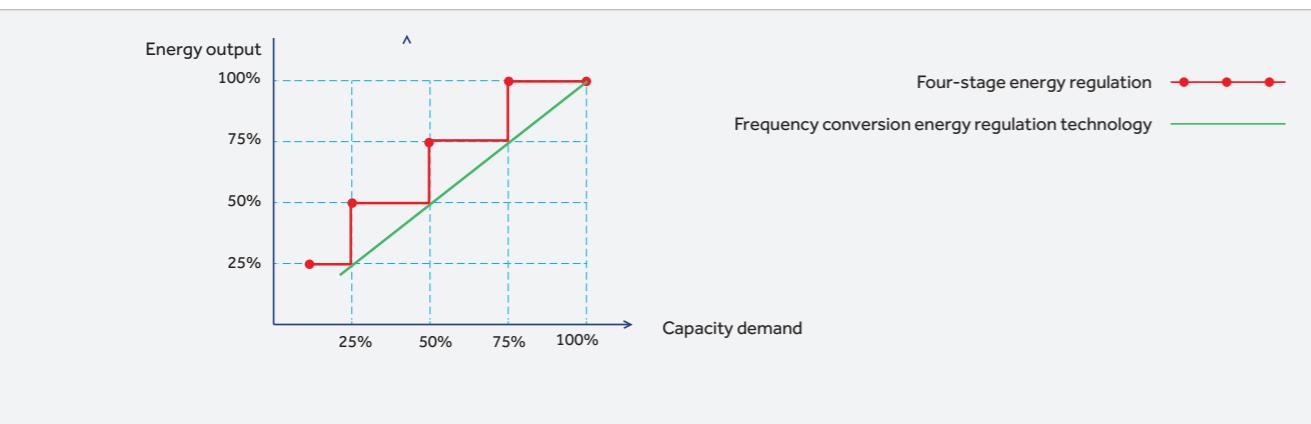

# High Reliability

## Electronic expansion valve throttling

The use of international brand electronic expansion valve throttling technology, the corresponding speed, rapid adjustment, energy adjustment range. The equal percentage characteristic of the control valve is ideally suited for operation with inverter compressor sets by virtue of the precise control of the refrigerant under partial load.

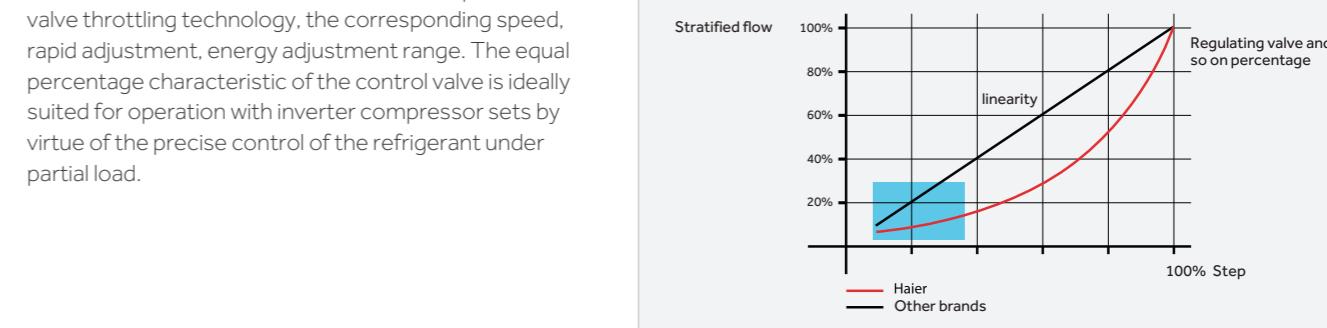


## Leading-edge oil return system design

The screw chillers are designed with a technologically advanced "3+2+1" oil return system to ensure reliable operation.

"3": the compressor comes with three levels of oil separation measures, holding me that low oil carrying capacity.

"2": external cyclone oil separator + no pump priming oil return technology, control oil separation effect up to 99.99%, while ensuring that no oil is stored in the evaporator, to enhance the system heat transfer efficiency.

"1" external oil distribution 1 high-definition sight glass, real-time detection of oil return effect Oil return system inlet and outlet are equipped with shut-off valves for easy maintenance and replacement of oil circuit components Dual head units are designed as independent systems, eliminating the need for oil balancing problems and providing greater reliability.

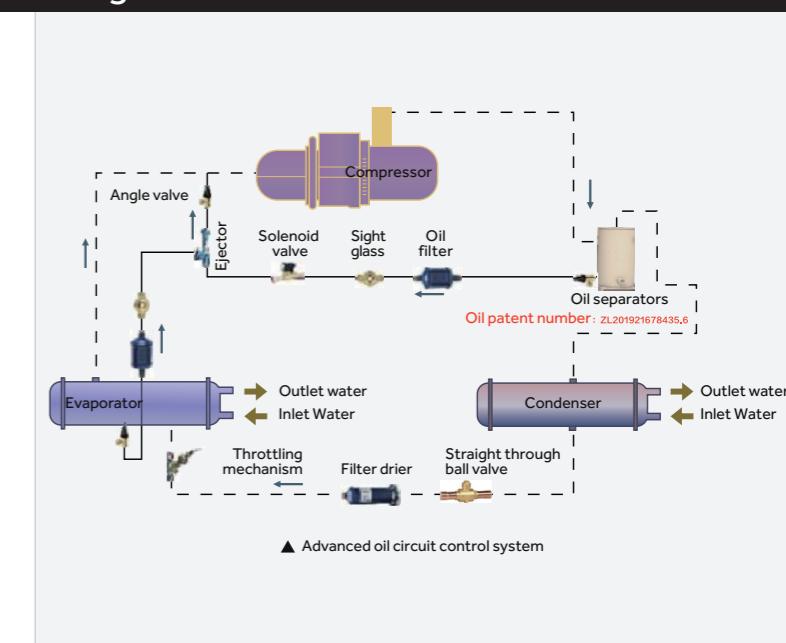

## Options/Accessories

Accessories	Standard	Optional
Compressor type	Single-screw	Twin-screw
Evaporator	Flooded	Falling film
Power supply	3N~380V/50Hz 3N~415V/50Hz	3N~400V/50Hz 3N~415V/50Hz
Thermal insulation thickness	20mm	30mm
Water side working pressure	1.0MPa	1.6MPa/2.5MPa
Automatic online rubber ball cleaning device	x	/
Channel steel base	x	/
Controller	PCB	PLC
Touch screen	7-inch	10-inch

**Inverter  
Water-cooled  
Screw Chiller**

AHRI CERTIFIED®  
[www.ahridirectory.org](http://www.ahridirectory.org)



High efficiency



Sub cooling design



MODEL		CIWP0530 MINEACAN1	CIWP0580 MINEACAN1	CIWP0620 MINEACAN1	CIWP0740 MINEACAN1		CIWP0860 MINEACAN1	CIWP0900 MINEACAN1	CIWP1000 MINEACAN1	CIWP1060 MINEACAN1	CIWP1270 MINEACAN1	CIWP1320 MINEACAN1	CIWP1690 MMNEACAN1	CIWP2100 MMNEACAN1	
Cooling capacity	Ton	151	165	175	210		244	255	285	300	360	375	481	595	
	kW	530.0	582.0	617.0	740.0		858.0	896.0	1004.0	1056.0	1265.0	1320.0	1690.0	2094.0	
	10 <sup>4</sup> kcal/h	45.6	50.0	53.0	63.6		73.8	77.0	86.3	90.8	108.8	113.5	145.3	180.0	
Power input	kW	102.0	111.0	116.0	135.0		156.0	163.0	180.0	188.0	224.0	233.5	295.0	355.0	
Max. power input	kW	140	153	160	186		217	224	250	261	312	328	401	494	
COP	W/W	5.20	5.24	5.32	5.48		5.50	5.50	5.58	5.62	5.65	5.65	5.73	5.90	
IPLV	W/W	8.13	8.16	8.16	8.18		8.17	8.16	8.17	8.23	8.27	8.28	8.32	8.32	
Starting amps	A	<240	<262	<274	<320		<372	<383	<429	<447	<534	<562	<686	<844	
Min circuit amps	A	240	262	274	320		372	383	429	447	534	562	686	844	
Compressor	Quantity	—					1						2		
	Type	—											Semi-Hermetic Screw		
Power supply	—												3N-/380V/50Hz		
Controller type	—												PCB		
Starting mode	—												VSD	VSD+Y/△	
Refrigerant throttle type	—												Electronic expansion valve		
Refrigerant	Type	—											R134a		
	Charge	kg	230	240	240	240		260	300	320	360	370	390	530	770
Evaporator	Type	—											Flooded type		
	Chilled water inlet/outlet temp.	—											12°C/7°C		
	Rated water flow	m <sup>3</sup> /h	91	100	106	127		148	154	173	182	218	227	291	360
	Water side pressure drop	kPa	53	56	56	63		65	60	60	55	55	62	92	94
	Connection size	DN(mm)	125	125	150	150		150	150	200	200	200	200	200	200
	Fouling factor	m <sup>2</sup> °C/kW											0.018		
Condenser	Standard pressure	MPa											1.0		
	Type	—											Shell & tube heat exchanger		
	Cooling water inlet/outlet temp.	—											30°C/35°C		
	Rated water flow	m <sup>3</sup> /h	109	119	126	151		174	182	204	214	256	267	341	421
	Water side pressure drop	kPa	67	64	66	69		69	68	68	65	70	70	89	90
	Connection size	DN(mm)	125	150	150	150		200	200	200	200	200	200	200	200
External dimension	Fouling factor	m <sup>2</sup> °C/kW											0.044		
	Standard pressure	MPa											1.0		
	Unit length	mm	3370	3370	3370	3420		3420	3500	3500	3500	3500	3500	5120	5220
Weight	Unit width	mm	1350	1400	1400	1500		1580	1770	1770	1870	1870	1870	1890	2040
	Unit height	mm	2050	2150	2150	2150		2420	2430	2430	2580	2700	2700	2510	2630
	Net weight	kg	3200	3450	3600	3850		4200	4700	4950	5350	6700	7500	11500	12700
Weight	Gross weight	kg	3235	3485	3635	3885		4235	4735	4985	5385	6735	7535	11535	12735
	Operation weight	kg	3685	3935	4085	4335		4685	5185	5435	5735	7185	7985	11985	13185


Note:

1.Except above standard models.Haier can be customized non-standard products according to customer requirements.

2.Due to our policy of innovation some specifications maybe changed without notification.

# Dimensions


Outline dimension

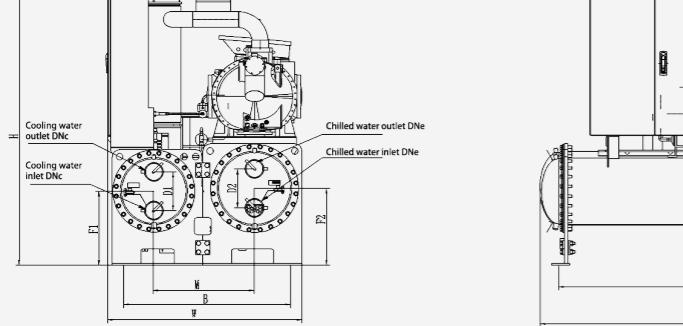

Model	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)						
	L	W	H	B	G	D1	D2	F1	F2	M	DNe	DNc
CIWP0530MINEACAN1	3370	1350	2050	1160	2950	270	270	514	534	700	DN125	DN125
CIWP0580MINEACAN1	3370	1400	2150	1160	2950	250	270	514	534	700	DN150	DN150
CIWP0620MINEACAN1	3370	1400	2150	1160	2950	250	270	514	534	700	DN150	DN150
CIWP0740MINEACAN1	3420	1500	2150	1160	2950	250	270	514	534	730	DN150	DN150
CIWP0860MINEACAN1	3420	1580	2420	1160	2950	250	270	582	602	730	DN150	DN150
CIWP0900MINEACAN1	3500	1770	2430	1270	2950	390	320	620	670	790	DN200	DN200
CIWP1000MINEACAN1	3500	1770	2430	1270	2950	390	320	620	670	790	DN200	DN200
CIWP1060MINEACAN1	3500	1870	2580	1270	2950	290	360	700	700	810	DN200	DN200
CIWP1270MINEACAN1	3500	1870	2700	1270	2950	290	360	627	627	810	DN200	DN200
CIWP1320MINEACAN1	3500	1870	2700	1270	2950	290	360	627	627	810	DN200	DN200



\*Please acquire detailed dimensions from Haier technicians.

Outline dimension

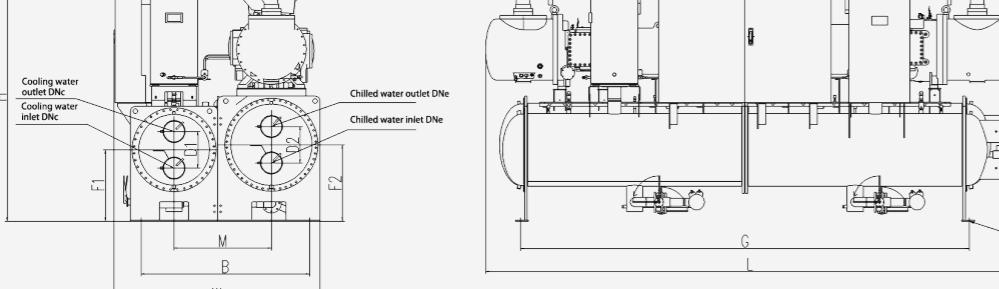

Model	Boundary Dimensions(mm)			Installation Dimensions(mm)		Nozzle Dimensions(mm)						
	L	W	H	B	G	D1	D2	F1	F2	M	DNe	DNc
CIWP1690MMNEACAN1	5120	1890	2510	1400	3823	360	360	654	704	860	DN200	DN200
CIWP2100MMNEACAN1	5220	2040	2630	1730	4423	360	360	704	754	960	DN200	DN200



Installation foundation drawing

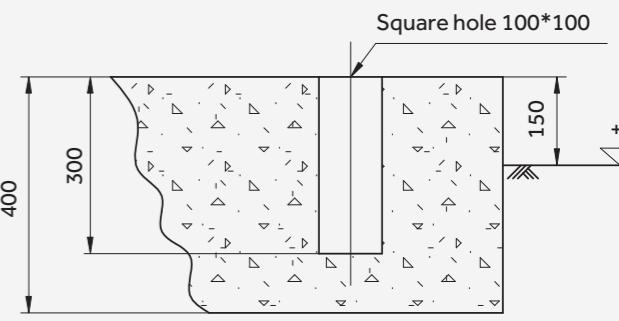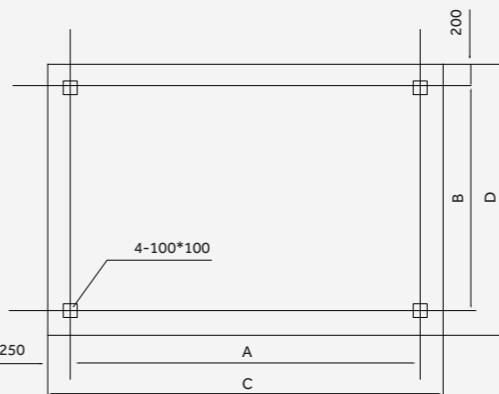

Reserved square hole on the base diagram

Model	CODE	Installation Dimension mm			
		A	B	C	D
CIWP0530MINEACAN1		2950	1160	3450	1560
CIWP0580MINEACAN1		2950	1160	3450	1560
CIWP0620MINEACAN1		2950	1160	3450	1560
CIWP0740MINEACAN1		2950	1160	3450	1560
CIWP0860MINEACAN1		2950	1160	3450	1560
CIWP0900MINEACAN1		2950	1270	3450	1670
CIWP1000MINEACAN1		2950	1270	3450	1670
CIWP1060MINEACAN1		2950	1270	3450	1670
CIWP1270MINEACAN1		2950	1270	3450	1670
CIWP1320MINEACAN1		2950	1270	3450	1670
CIWP1690MMNEACAN1		3823	1400	4323	1800
CIWP2100MMNEACAN1		4423	1730	4923	2130

Reserved Space Dimension

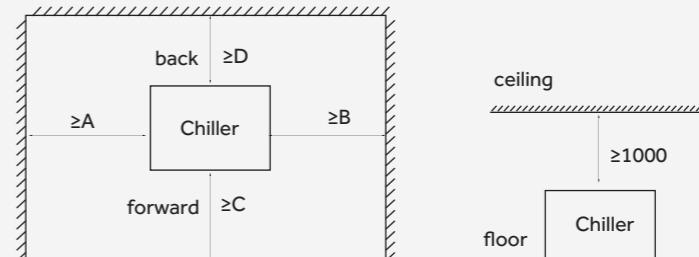

Model	CODE	Reserved Space Dimension mm mm			
		A	B	C	D
CIWP0530MINEACAN1		3000	1200	1200	800
CIWP0580MINEACAN1		3000	1200	1200	800
CIWP0620MINEACAN1		3000	1200	1200	800
CIWP0740MINEACAN1		3000	1200	1200	800
CIWP0860MINEACAN1		3000	1200	1200	800
CIWP0900MINEACAN1		3000	1200	1200	800
CIWP1000MINEACAN1		3000	1200	1200	800
CIWP1060MINEACAN1		3000	1200	1200	800
CIWP1270MINEACAN1		3000	1200	1200	800
CIWP1320MINEACAN1		3000	1200	1200	800
CIWP1690MMNEACAN1		2000	2000	1200	800
CIWP2100MMNEACAN1		2300	2300	1200	800

## Water-cooled Screw Chiller (fixed frequency)



High efficiency



Sub cooling design



MODEL		CIWP0390 MFNEACAN1	CIWP0440 MFNEACAN1		CIWP0510 MFNEACAN1	CIWP0580 MFNEACAN1	CIWP0710 MFNEACAN1
Cooling capacity	Ton	110	125		145	165	200
	kW	386.9	439.6		510.0	580.3	703.4
Power input	kW	71.26	78.72		93.83	103.4	125.1
COP	W/W	5.429	5.585		5.435	5.612	5.623
Compressor	Quantity	—	1			1	
	Type	—	Semi-Hermetic screw compressor			Semi-Hermetic screw compressor	
Power supply	—	3N~/380V/50Hz				3N~/380V/50Hz	
Starting mode	—	Y-△				Y-△	
Starting current	A	450	450		704	704	768
Max. running current	A	171	186		219	256	291
Max.Power Input	kW	98	109		125	149	169
Capacity control	—	25~100%					
Controller type	—	PCB				PCB	
Refrigerant throttle type	—	Electronic expansion valve				Electronic expansion valve	
Refrigerant	Type	—	R134a			R134a	
	Charge	kg	160	160	160	190	200
Evaporator	Type	—	Flooded type			Flooded type	
	Chilled water inlet/outlet temp.		12°C/7°C			12°C/7°C	
	Rated water flow	m³/h	67	76	88	100	121
	Water side pressure drop	kPa	76	81	80	80	84
	Connection size	DN	125	125	150	150	150
	Fouling factor	m².°C/kW	0.018			0.018	
	Pass		2			2	
	Standard pressure	MPa	1.0			1.0	
Condenser	Type	—	Shell&tube heat exchanger			Shell&tube heat exchanger	
	Cooling water inlet/outlet temp.		30°C/35°C			30°C/35°C	
	Rated water flow	m³/h	79	89	104	118	143
	Water side pressure drop	kPa	77	79	83	83	82
	Connection size	DN	125	125	150	150	150
	Fouling factor	m².°C/kW	0.044			0.044	
	Pass		2			2	
	Standard pressure	MPa	1.0			1.0	
External dimension	Unit length	mm	2420	2520	2520	2630	2770
	Unit width	mm	1700	1700	1700	1790	1750
	Unit height	mm	1890	1890	1890	1970	2060
Weight	Net weight	kg	2750	2970	3265	3660	3950
	Gross weight	kg	2795	3015	3310	3705	3995
	Operation weight	kg	3100	3220	3740	3990	

Note:

1.Except above standard models.Haier can be customized non-standard products according to customer requirements.

2.Due to our policy of innovation some specifications maybe changed without notification.

## Water-cooled Screw Chiller (fixed frequency)



High efficiency



Sub cooling design




MODEL		CIWP0780 MFNEACAN1	CIWP0880 MFNEACAN1	CIWP1020 MFNEACAN1		CIWP1200 MFNEACAN1	CIWP1410 MFNEACAN1	CIWP1590 MFNEACAN1	CIWP1690 MFNEACAN1	CIWP1900 MFNEACAN1	
Cooling capacity	Ton	220	250	290		340	400	450	480	540	
	kW	773.7	879.3	1020		1196	1407	1583	1688	1899	
Power input	kW	137.7	156.1	180.6		205.7	241.2	266.9	280.2	318.1	
COP	W/W	5.619	5.633	5.647		5.813	5.833	5.930	6.025	5.970	
Compressor	Quantity	—						2			
	Type	—						Semi-Hermetic screw compressor			
Power supply	—							3N~/380V/50Hz			
Starting mode	—							Y-△			
Starting current	A	619	633	909		930	1139	1417	1389	1389	
Max. running current	A	342	373	438		512	583	700	756	888	
Max.Power Input	kW	196	219	251		298	339	412	450	511	
Capacity control	—							12.5~100%			
Controller type	—							PCB			
Refrigerant throttle type	—							Electronic expansion valve			
Refrigerant	Type	—						R134a			
	Charge	kg	280	290	320		360	380	450	500	520
Evaporator	Type	—						Flooded type			
	Chilled water inlet/outlet temp.							12°C/7°C			
	Rated water flow	m³/h	133	151	175		206	242	272	290	327
	Water side pressure drop	kPa	79	83	82		85	83	84	89	88
	Connection size	DN	150	200	200		200	200	200	200	200
	Fouling factor	m²·°C/kW						0.018			
	Pass							2			
Condenser	Standard pressure	MPa						1.0			
	Type	—						Shell&tube heat exchanger			
	Cooling water inlet/outlet temp.							30°C/35°C			
	Rated water flow	m³/h	157	178	206		241	283	318	339	381
	Water side pressure drop	kPa	80	84	83		86	87	88	86	84
	Connection size	DN	150	200	200		200	200	200	200	200
	Fouling factor	m²·°C/kW						0.044			
External dimension	Pass							2			
	Standard pressure	MPa						1.0			
	Unit length	mm	4550	4830	4830		5180	5250	5250	5170	5380
	Unit width	mm	1580	1580	1610		1670	1710	1840	1910	1910
	Unit height	mm	2030	2030	2030		2040	2060	2160	2210	2250
	Net weight	kg	5200	5310	6100		7965	8700	9350	11100	12800
	Gross weight	kg	5260	5370	6160		8025	8760	9410	11160	12860
Weight	Operation weight	kg	5620	5740	6570		8600	9410	10600	11900	13500

Note:

1.Except above standard models.Haier can be customized non-standard products according to customer requirements.


2.Due to our policy of innovation some specifications maybe changed without notification.

# Dimensions

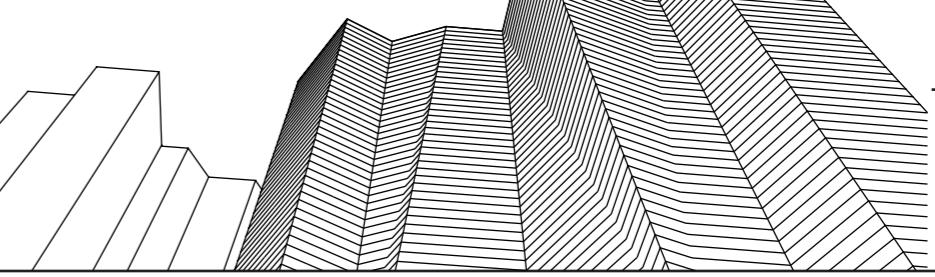

Outline dimension

Single compressor unit

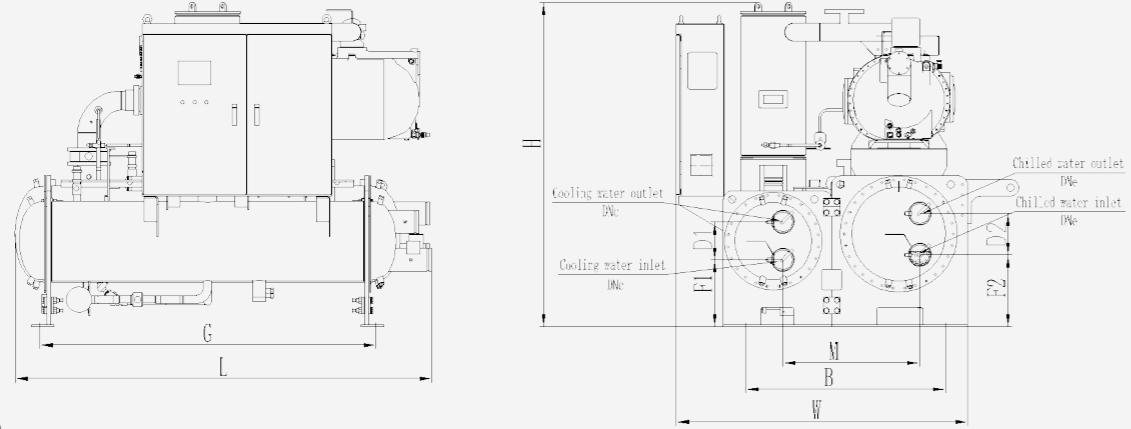


Dimension: mm

Code	Dimension			Installation Dimension		Dimension of Pipe						
	L	W	H	B	G	F1	D1	F2	D2	M	DNc	DNc
CIWP0390MFNEACAN1	2420	1700	1890	1160	1950	387	220	416	240	795	DN125	DN125
CIWP0440MFNEACAN1	2520	1700	1890	1160	1950	387	220	416	240	795	DN125	DN125
CIWP0510MFNEACAN1	2520	1700	1890	1160	1950	387	220	416	240	795	DN150	DN150
CIWP0580MFNEACAN1	2630	1790	1970	1160	1950	382	280	421	280	820	DN150	DN150
CIWP0710MFNEACAN1	2770	1750	2060	1160	2250	401	241	476	241	775	DN150	DN150

Note: In consideration of continuous improvement of products, the size of the unit may be changed

Double Compressors Chiller

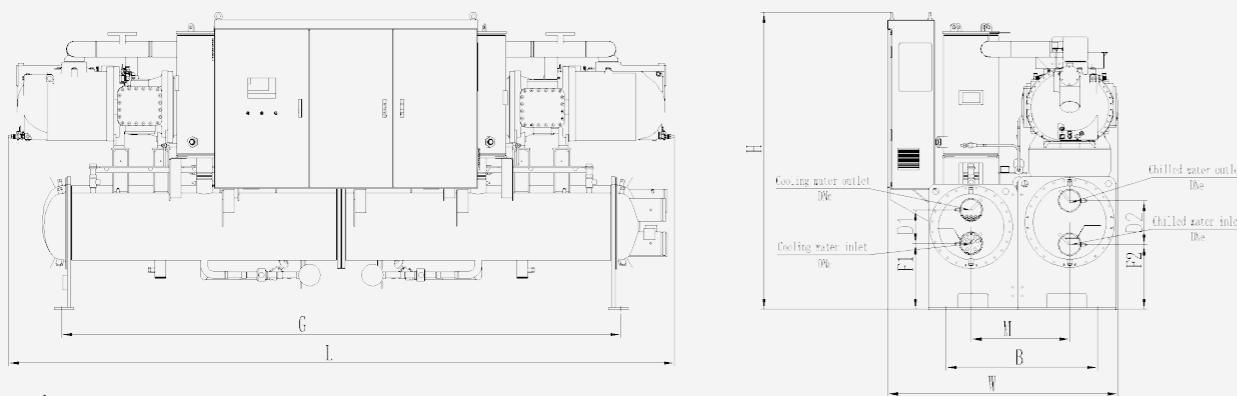


Dimension: mm

Code	Dimension			Installation Dimension		Dimension of Pipe						
	L	W	H	B	G	D1	D2	F1	F2	M	DNc	DNc
CIWP0780MFNEACAN1	4550	1580	2030	1035	3823	232	300	564	592	675	DN150	DN150
CIWP0880MFNEACAN1	4830	1580	2030	1035	3823	232	300	564	592	675	DN200	DN200
CIWP1020MFNEACAN1	4830	1610	2030	1035	3823	274	290	564	617	697	DN200	DN200
CIWP1200MFNEACAN1	5180	1670	2040	1035	4424	274	290	564	617	697	DN200	DN200
CIWP1410MFNEACAN1	5250	1710	2060	1160	4423	274	290	522	617	745	DN200	DN200
CIWP1590MFNEACAN1	5250	1840	2160	1270	4423	274	290	617	642	830	DN200	DN200
CIWP1690MFNEACAN1	5170	1910	2210	1270	4423	274	290	617	642	830	DN200	DN200
CIWP1900MFNEACAN1	5380	1910	2250	1270	4423	274	290	617	642	830	DN200	DN200


Note: In consideration of continuous improvement of products, the size of the unit may be changed

Installation foundation drawing

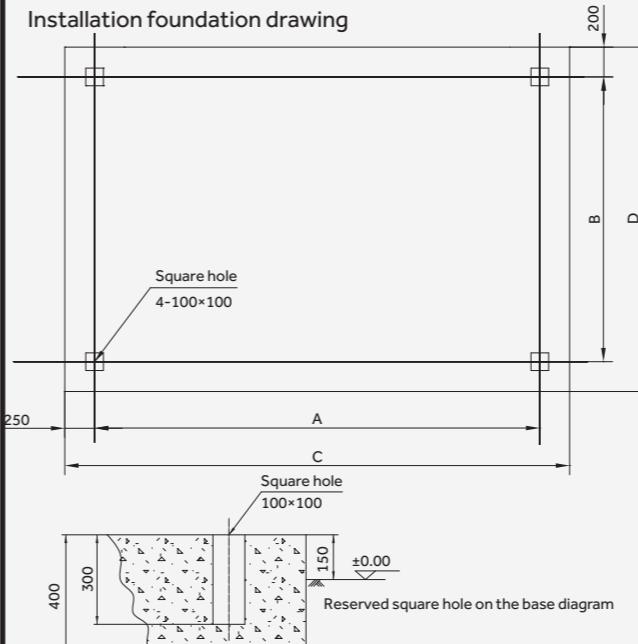

Model	Code				Installation Dimension(mm)			
	A	B	C	D	A	B	C	D
CIWP0390MFNEACAN1	1950	1160	2450	1560	1950	1160	2450	1560
CIWP0440MFNEACAN1	1950	1160	2450	1560	1950	1160	2450	1560
CIWP0510MFNEACAN1	1950	1160	2450	1560	1950	1160	2450	1560
CIWP0580MFNEACAN1	1950	1160	2450	1560	1950	1160	2450	1560
CIWP0710MFNEACAN1	2250	1160	2750	1560	2250	1160	2750	1560
CIWP0780MFNEACAN1	3823	1035	4323	1435	3823	1035	4323	1435
CIWP0880MFNEACAN1	3823	1035	4323	1435	3823	1035	4323	1435
CIWP1020MFNEACAN1	3823	1035	4323	1435	3823	1035	4323	1435
CIWP1200MFNEACAN1	4423	1035	4923	1435	4423	1035	4923	1435
CIWP1410MFNEACAN1	4423	1160	4923	1560	4423	1160	4923	1560
CIWP1590MFNEACAN1	4423	1270	4923	1670	4423	1270	4923	1670
CIWP1690MFNEACAN1	4423	1270	4923	1670	4423	1270	4923	1670
CIWP1900MFNEACAN1	4423	1270	4923	1670	4423	1270	4923	1670

Reserved space size

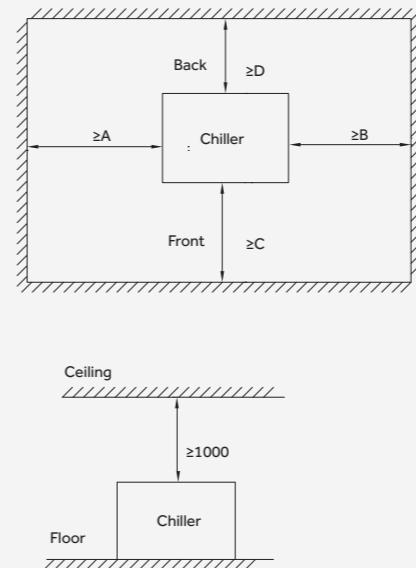


Model	Code				Installation Dimension(mm)			
	A	B	C	D	A	B	C	D
CIWP0390MFNEACAN1	1900	1200	1200	800	1900	1200	1200	800
CIWP0440MFNEACAN1	1900	1200	1200	800	1900	1200	1200	800
CIWP0510MFNEACAN1	1900	1200	1200	800	1900	1200	1200	800
CIWP0580MFNEACAN1	1900	1200	1200	800	1900	1200	1200	800
CIWP0710MFNEACAN1	2200	1200	1200	800	2200	1200	1200	800
CIWP0780MFNEACAN1	1900	1900	1200	800	1900	1900	1200	800
CIWP0880MFNEACAN1	1900	1900	1200	800	1900	1900	1200	800
CIWP1020MFNEACAN1	1900	1900	1200	800	1900	1900	1200	800
CIWP1200MFNEACAN1	2200	2200	1200	800	2200	2200	1200	800
CIWP1410MFNEACAN1	2200	2200	1200	800	2200	2200	1200	800
CIWP1590MFNEACAN1	2200	2200	1200	800	2200	2200	1200	800
CIWP1690MFNEACAN1	2200	2200	1200	800	2200	2200	1200	800
CIWP1900MFNEACAN1	2200	2200	1200	800	2200	2200	1200	800

# Air-cooled Screw Chiller




## Nomenclature

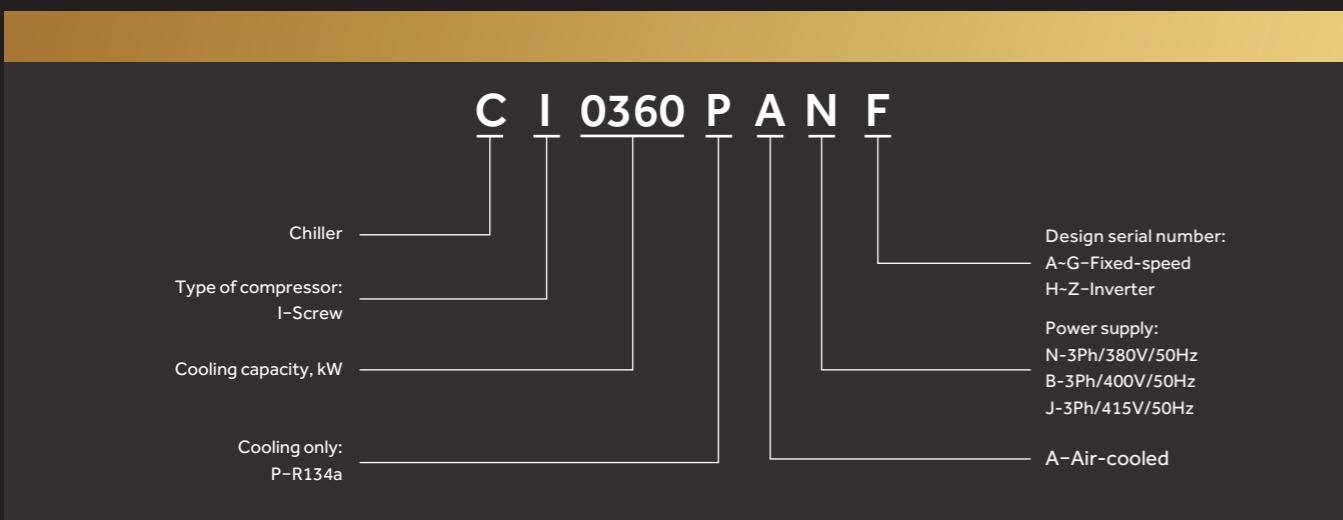

## High Efficiency

### High efficiency compressor

- The unit adopts high efficient twin-screw compressor.
- High efficiency: the compressor adopts 5:6 non-symmetry bear design with large volume and high efficiency.
- The units adopt multi-stage adjustment. Each unit can realize 25%-50%-75%-100% capacity control to meet different demands.
- Motor adopts Y-Δ start method, which has low start current and low impact to the power network.
- High precise manufacturing process avoids any leakage, and increases the compressor efficiency.
- The inner refrigerant suction system is cooled by the refrigerant, avoiding any capacity loss.
- The suction side adopts temperature insulation material, avoiding any condensing and energy loss.

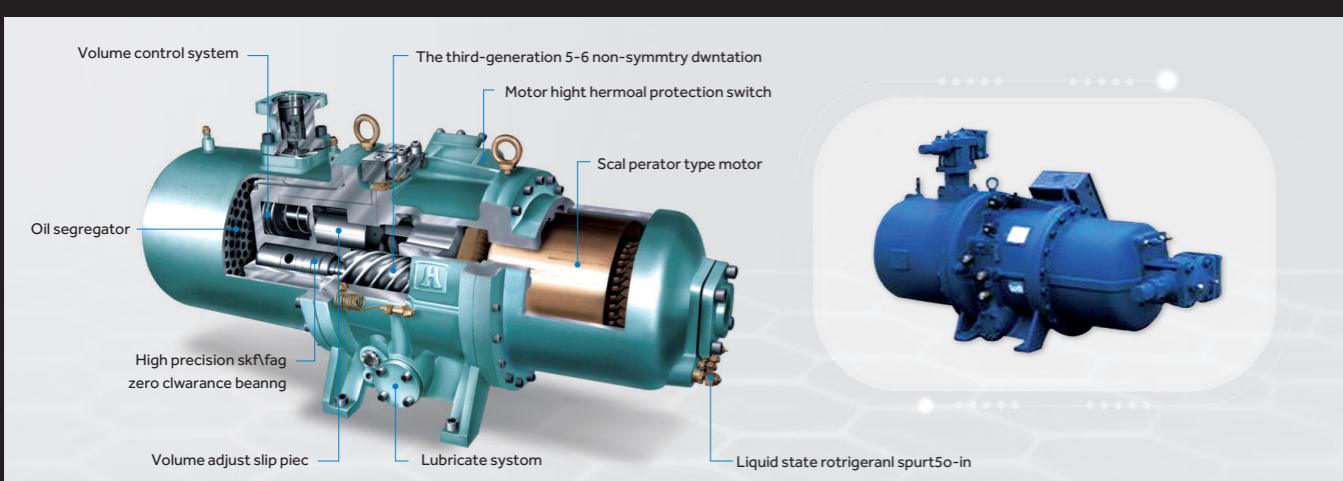


### Water-side heat exchanger

Shell & tube type evaporator is having refrigerant in the shell and chilled water inside the tubes. Advantage of this type evaporator is reduced refrigerant charge.



### Falling film evaporator optional

Patent liquid box design, uniform refrigerant distribution; Adopting cluster zoning technology to ensure high heat transfer efficiency.

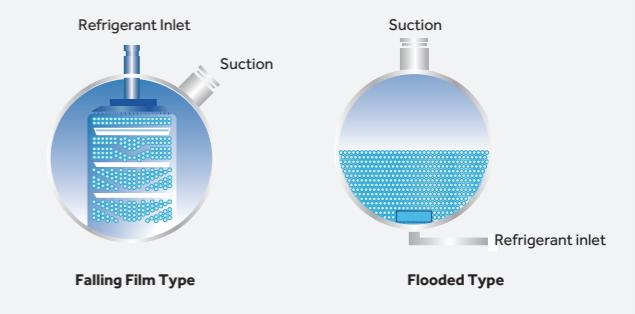


### High efficiency axial flow fan

Professional flow field optimization design, fan impeller has good aerodynamic performance, low noise and efficient fan operation.




### Stepless adjustment, adaptive cooling capacity

The classic PID control technology is used to quickly match the load fluctuation of the user and ensure the stability of the user's water temperature.

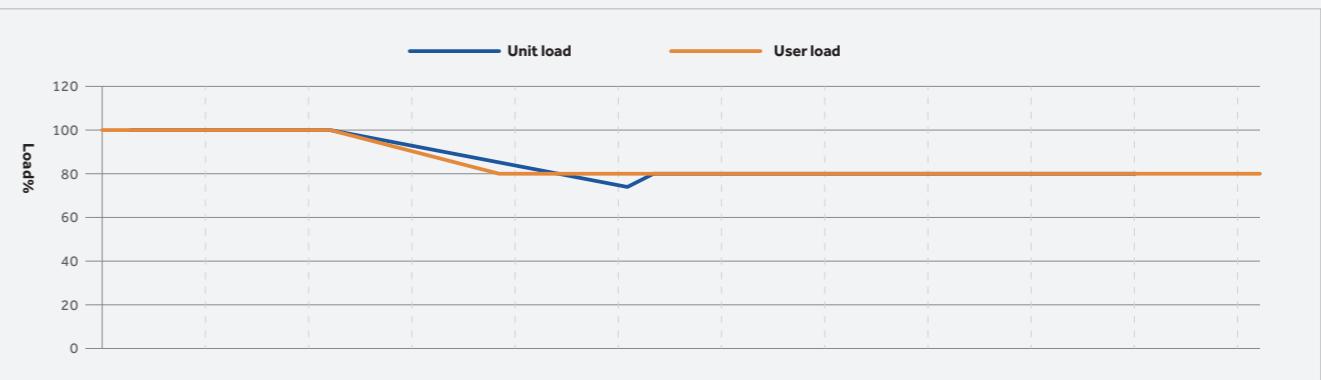


## EXV design

The chiller adopts EXV to control the refrigerant flow accurately according to the demands, increasing the COP and keeping the products more stable.



## Economizer sub-cooling design

The chiller takes high efficiency plate heat exchanger as economizer, which sub cools the refrigerant for another 18 degrees in high pressure side, increasing the COP by 3-5%.

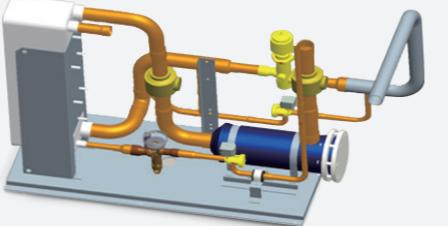

## High Reliability

### Wide running application

For all models, the units can realize cooling at 52°C high ambient temperature.



## Convenient

### Password design

The controller can set password, so only the administrator can operate the chiller.



### Functional control screen

7 inch colorful touch screen.

**Status:** Water temperature, pressure/current/pump/running curve/history curve

**Timer:** Weekly timer

**Error:** Error history check

**User:** Local control/BMS control



MODEL	MASTER MODULE			SLAVE MODULE		
	CI0320PANF	CI0440PANF	CI0530PANF	CI0320PANG	CI0440PANG	CI0530PANG
Cooling capacity	Ton	90	125	150	90	125
	kW	316.5	439.6	527.6	316.5	439.6
Power input	kW	105.1	141.1	174.3	105.1	141.1
COP	kW/kW	3.012	3.116	3.027	3.012	3.116
Compressor	Type	Semi-Hermetic screw compressor			Semi-Hermetic screw compressor	
Power supply	Quantity	EA	1	1	1	1
Starting mode		3N-/380V/50Hz			3N-/380V/50Hz	
Max. Current	A	290	387	480	290	387
Max. Power input	kW	162	220	271	162	220
Capacity control		25%、50%、75%、100%			25%、50%、75%、100%	
Controller type		PCB			PCB	
Refrigerant throttle type		Electronic expansion valve			Electronic expansion valve	
Refrigerant	Type	R134a			R134a	
Charge	kg	90	135	150	90	135
Air side heat exchanger	Type	Inner grooved copper pipe & hydrophilic aluminum fin coil			Inner grooved copper pipe & hydrophilic aluminum fin coil	
Dry-bulb temperature	°C	35			35	
Fan type		Low sound axial fan			Low sound axial fan	
Fan Quantity	EA	6	8	10	6	8
Water side heat exchanger	Type	Dry-type			Dry-type	
Chilled water inlet/outlet temp.	°C	12/7			12/7	
Rated water flow	m³/h	54.4	75.6	90.7	54.4	75.6
Water side pressure drop	kPa	50	50	70	50	70
Connection Size	DN	100	125	150	100	125
Fouling Factor	m²•°C/kW	0.018			0.018	
Standard pressure	MPa	1.0			1.0	
External dimension	Unit length	mm	3450	4600	5750	3450
	Unit width	mm	2050	2050	2050	2050
	Unit height	mm	2520	2520	2520	2520
Weight	Net weight	kg	3660	4690	5600	3660
	Gross weight	kg	3700	4730	5640	3700
	Operation weight	kg	3840	4890	5820	3840

Note:

1.When multiple modules are combined, only one master module must be combined, and maximum 4 module combinations.


2.Due to our policy of innovation some specifications maybe changed without notification.

MODEL	Water outlet temp. °C	Ambient temp. °C	18	24	30	35	41	43
			Cooling capacity kW	Power input kW	Cooling capacity kW	Power input kW	Cooling capacity kW	Power input kW
CI0320PANF	5	338.3	329.2	314.1	302.0	286.9	277.9	
	7	73.5	83.0	93.5	103.0	115.4	123.1	
	9	354.4	344.9	329.1	316.5	300.6	291.1	
	11	74.7	84.5	95.2	105.1	117.6	125.3	
	13	375.2	365.1	348.4	335.0	318.2	308.2	
	15	76.1	86.0	96.9	106.9	119.8	127.7	
CI0440PANF	5	469.7	457.1	436.2	419.4	398.5	385.9	
	7	98.7	111.5	125.6	138.5	155.2	165.5	
	9	492.1	479.0	457.0	439.6	417.5	404.2	
	11	100.5	113.7	128.1	141.1	158.2	168.6	
	13	521.1	507.1	483.8	465.2	442.0	428.0	
	15	102.4	115.7	130.4	143.8	161.0	171.7	
CI0530PANF	5	547.6	532.9	508.5	488.9	464.4	449.8	
	7	103.2	116.6	131.4	144.8	162.3	173.1	
	9	575.6	560.2	534.6	513.9	488.2	472.9	
	11	104.2	117.7	132.6	146.1	163.8	174.5	
	13	602.8	586.6	559.8	538.3	511.3	495.2	
	15	107.4	121.3	136.7	150.7	168.9	180.0	


# Dimensions

Outline dimension


C10320PANF

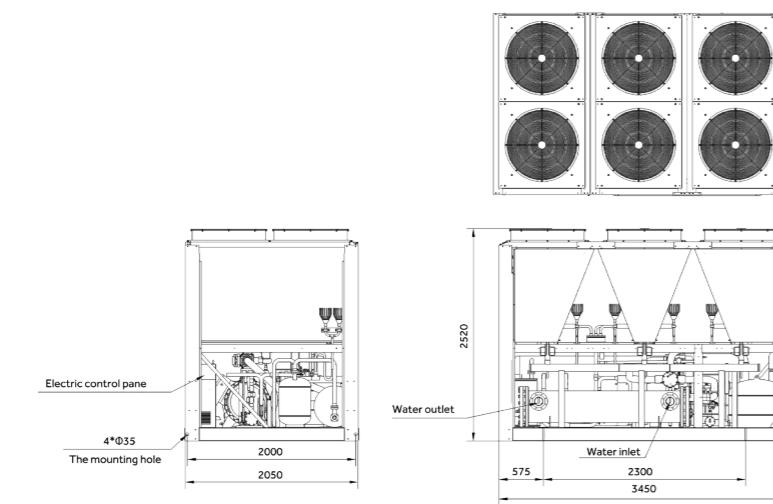

CI0440PANF

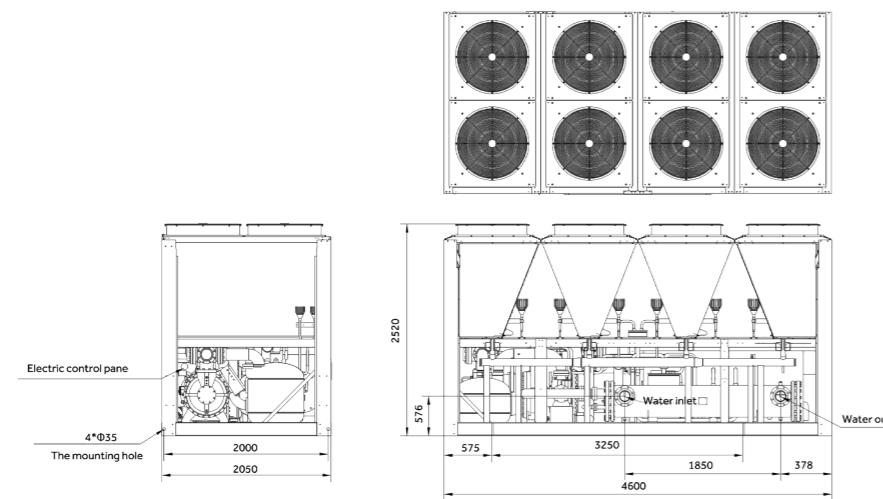


C10530PANF

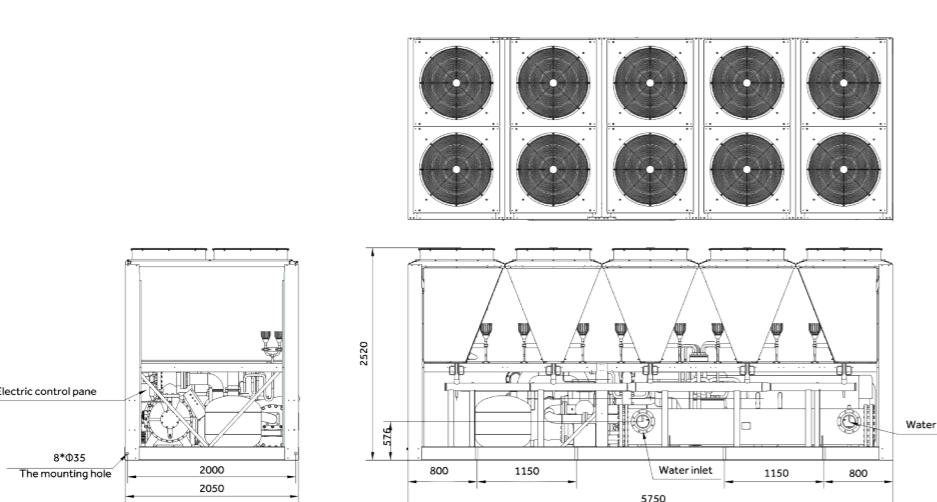


Installation foundation drawing

Model	A (mm)	B (mm)	C (mm)	D (mm)
CI0320PANF/CI0320PANG	2100		2000	2300
CI0440PANF/CI0440PANG	3250		2000	2300
CI0530PANF/CI0530PANG	2200	4400	2000	2300

Note: In consideration of continuous improvement of products, the size of the unit may be changed

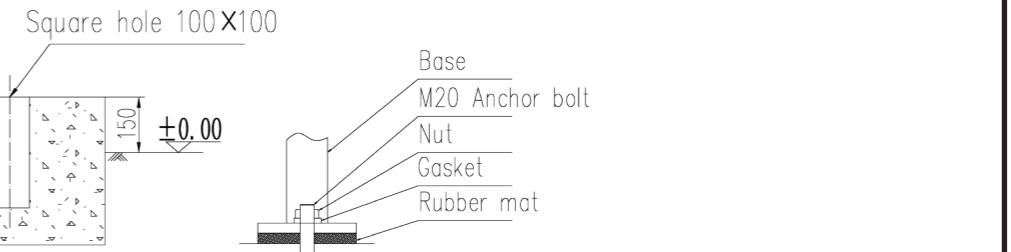

Service space requirements

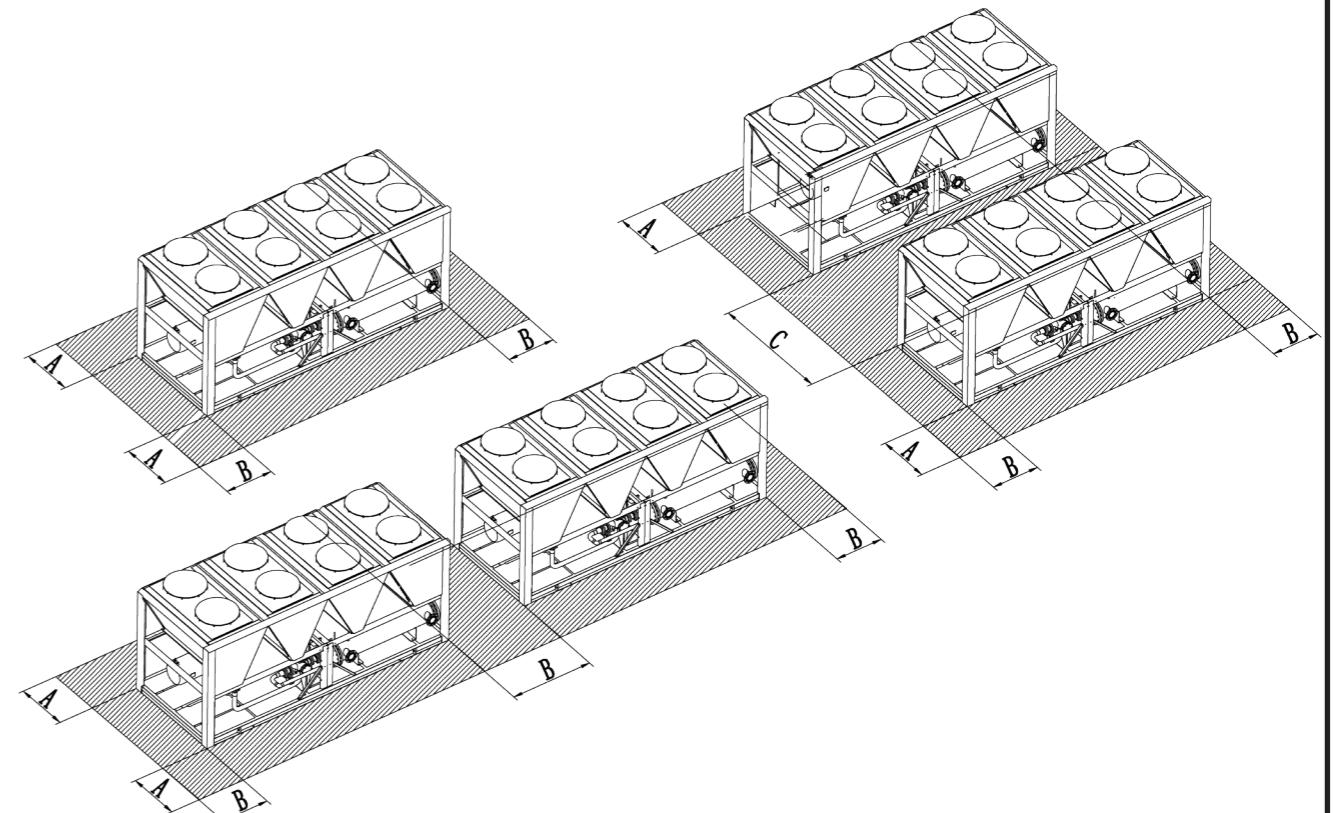

Installation space diagram(mm)

A	B	C
≥1500	≥1200	≥2000

Note: In consideration of continuous improvement of products, the size of the unit may be changed

## MODULAR CHILLER



**114** R32 Inverter Air-cooled  
Modular Chiller




# R32 Inverter Air-cooled Modular Chiller



## Introduction

Haier Super Clima R32 Inverter Air-Cooled Modular Chiller providing cooling, heating and domestic hot water high performance with Eco-friendly refrigerant R32.

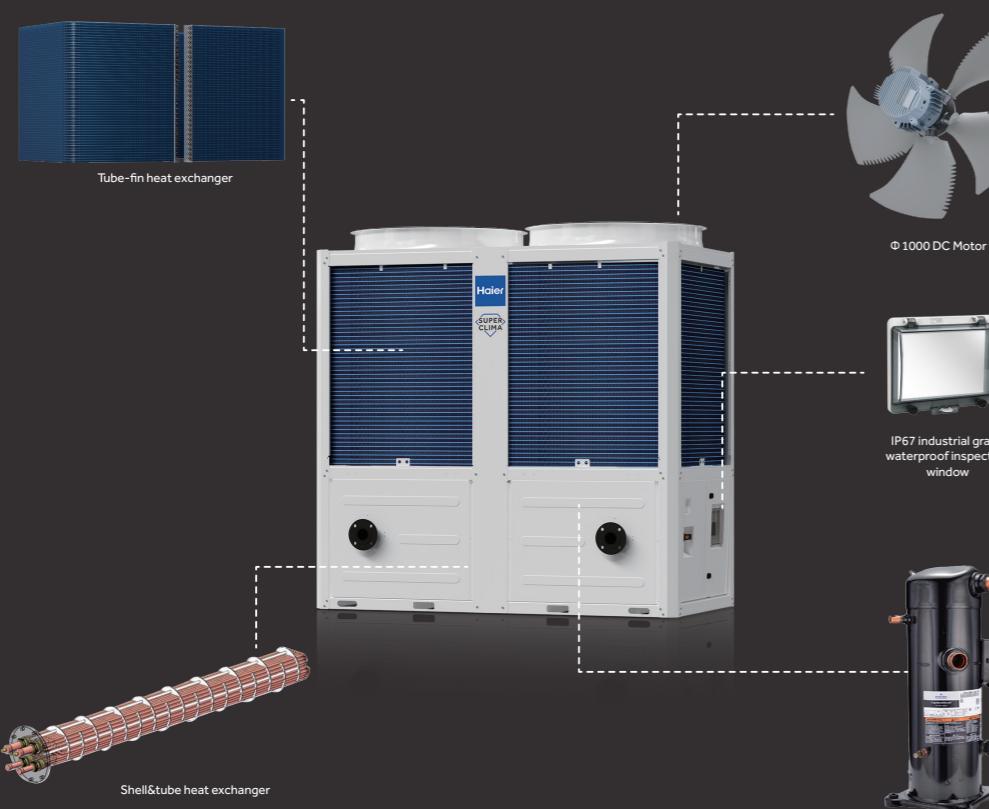



## Product Line-up

Model	CA0070HANH	CA0100HANH	CA0140HANH
Capacity Cooling/Heating	65/71	100/100	130/142
Appearance			



## Excellent Performance


New products offer high efficiency both at full load and annual years operation conditions.

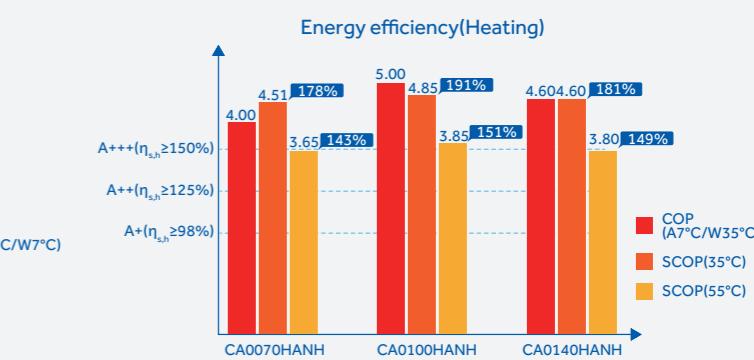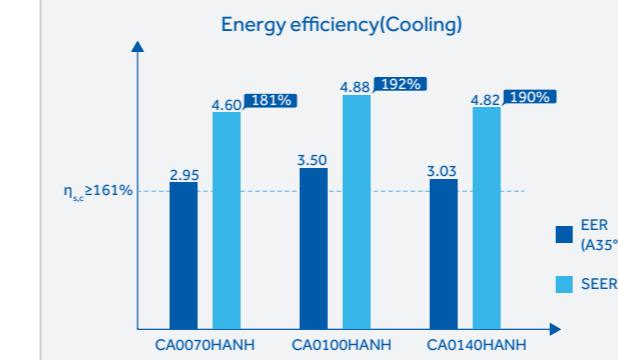

## High-efficiency components results in excellent performance.

### Full DC Inverter scroll compressor with EVI


The latest DC inverter compressor with EVI technology to create a strong "power" for the unit. Uniquely designed with higher compression ratios and larger pressure difference allows the unit to operate reliably even in the harshest ambient conditions. It realizes the stepless adjustment of the compressor capacity to achieve precise temperature control.

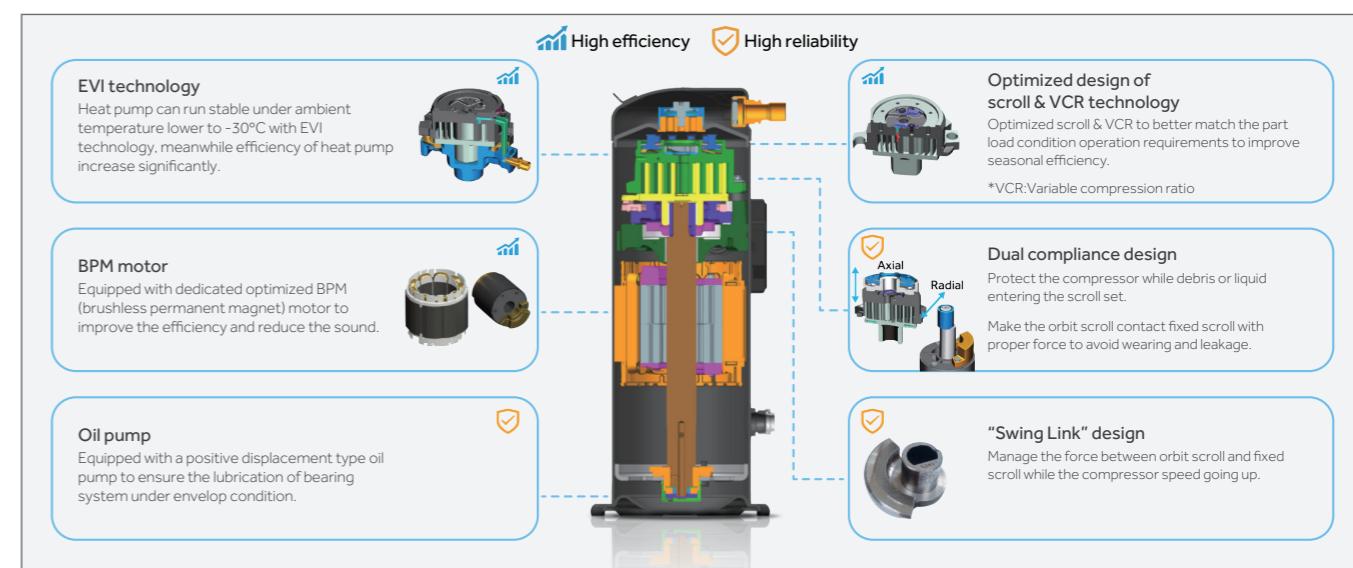

## Φ 1000 DC Motor fan

The industry's largest diameter axial fans increase air volume and make more effective heat exchange while reducing noise. The trailing edge of the fan blade is designed with a bio-mimetic tooth shape, effectively cutting and combing the airflow at the outlet to achieve reduced wind noise, stable and powerful air output, and quiet operation.

Variable speed fans by drive DC motors offer better seasonal performance.

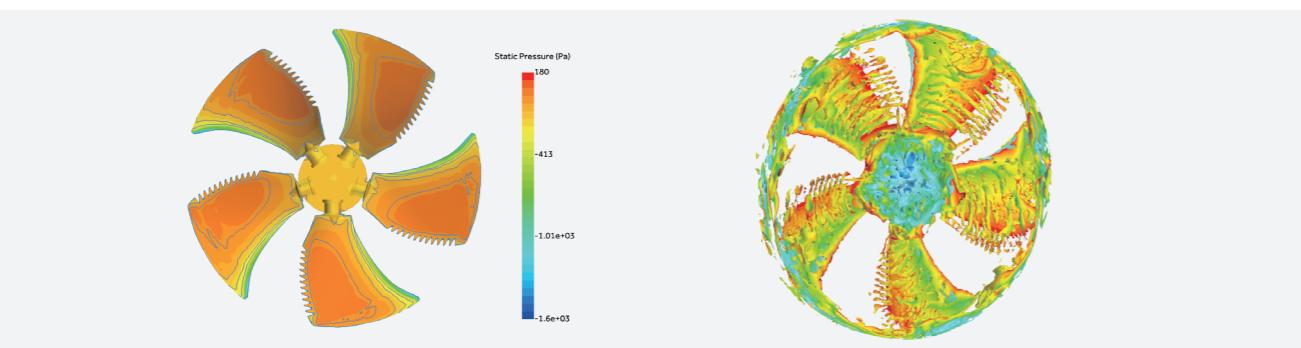


### Tube-fin heat exchanger

U-shaped heat exchanger in one piece enlarges the heat exchanging area by 47%\* and allows airflow from 360° directions to improve performance.

\*Compared to the previous generation R410A air-cooled modular chiller

Φ7 inner-threaded copper tubes increases internal turbulence and then enhances heat exchange. The corrugated fins are made of hydrophilic aluminum foil to improve airflow and overall optimize heat exchange efficiency.


Controlled by 2 electronic expansion valves, the refrigerant flow is more evenly, which results in more adequate heat transfer.



### Shell&tube heat exchanger

Patented design shell&tube heat exchanger can significantly enhance the units' anti-frosting and anti-fouling performance.


The installation of baffles enhances fluid turbulence, thereby promoting heat transfer between the fluids.




## Unparalleled Flexibility

### Wide operating range

The unit can stable operate under wide conditions, which is ideal option for various requirements.

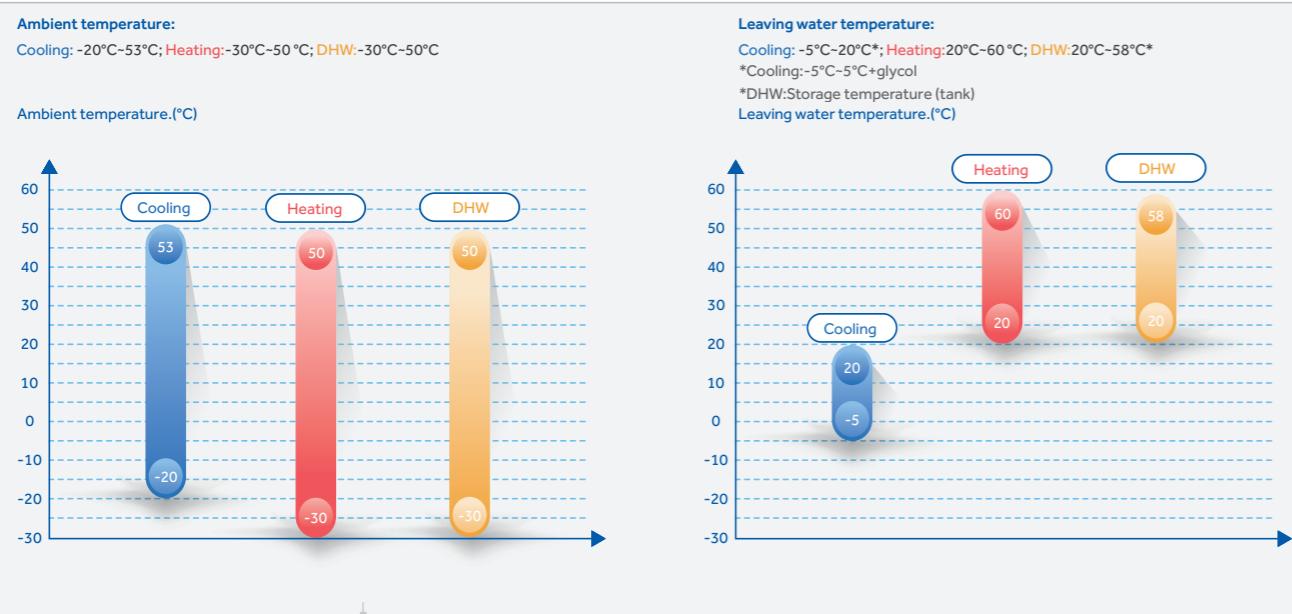

## Operating envelope

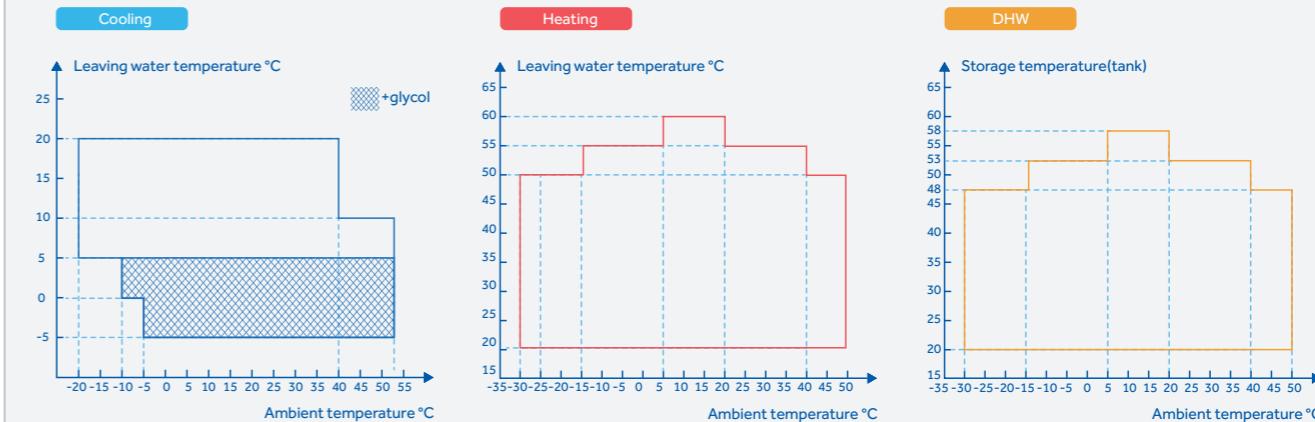


## Multiple applications

Integrated heating, cooling and domestic hot water into one system, adapt easily to multiple applications.




## Typical Cooling/Heating/DHW system application

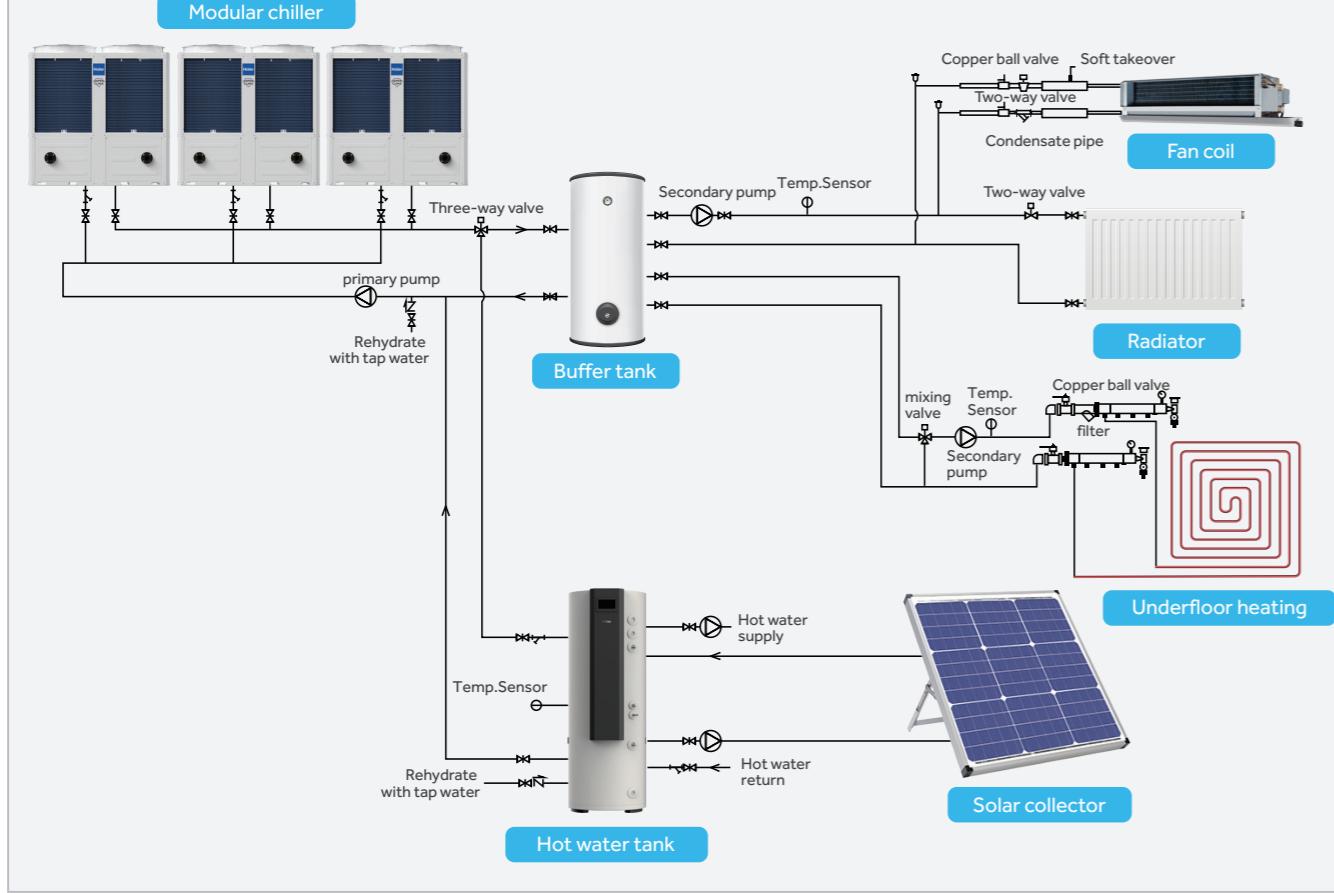

## Max.16 combination

Max up to 16 units can be connectable into one system to meet larger capacity demands.

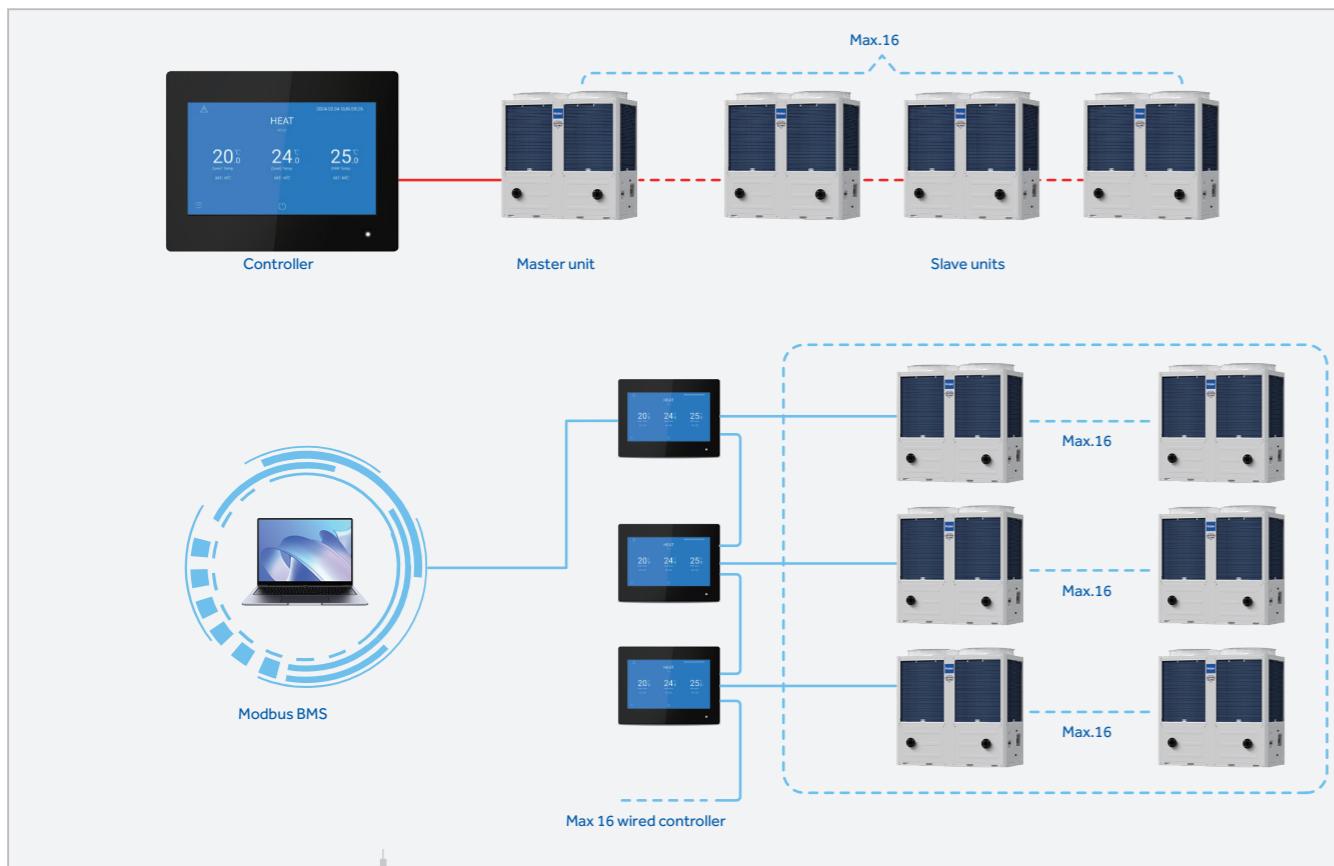

## Ultimate Comfort

### Intelligent precise defrosting

Module chiller design to monitor the refrigerant pressure and temperature when frost happen, the PCB would detect the heat load recession and start defrosting to make sure chiller optimization operation.


- CA0100HANH/CA0140HANH have two independent refrigerant circuit. Winter at heating operation for defrost period that one circuit is in defrost, the other still working in heating that chiller operation simultaneously and stability.
- In combination system, defrosting one of module does not affect other modules operation. If one unit is defrosted, other heat units still in operate. That realize non-stop system heating during defrosting.



- To cope with blizzards and freezing rain weather, it is equipped with centralized drainage and electric heating functions as standard. This ensures that condensate or defrosting water can be quickly discharged to the external unit during severe weather conditions, preventing ice buildup.

### Low sound level

- Multi design to reduce noise, ensure chiller always running at a low sound level.
- Used the soundproof material, blocking noise from the compressor.
- Mounted on the rubber anti-vibration pad for chiller quiet operation and low vibration.
- Insulation the removable panels that help reduce the noise level.
- Brushless DC fan motor and aerodynamically optimized impeller for noise and vibration reduction.
- The quiet function would work low-speed.

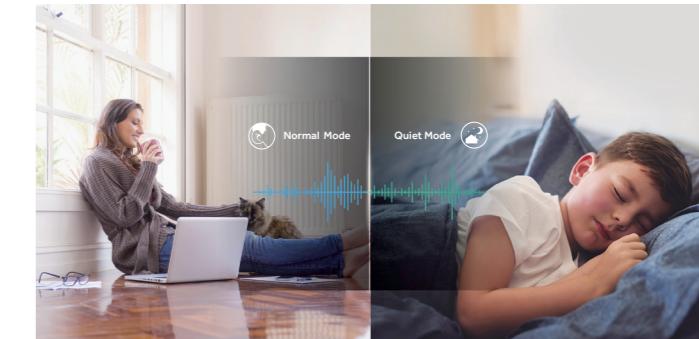


MODULAR CHILLER

## High Reliability

### Safety is paramount

With Emg stop button & built-in circuit breaker double protection design ensure safety for users and unit. When the unit is powered on, the self-locking mechanism of circuit breaker will lock, preventing users opening the door of the control box, minimizing the risk of electric shock. In addition, this design protect the power circuit system when electrical faults, result prolonged chiller operation.

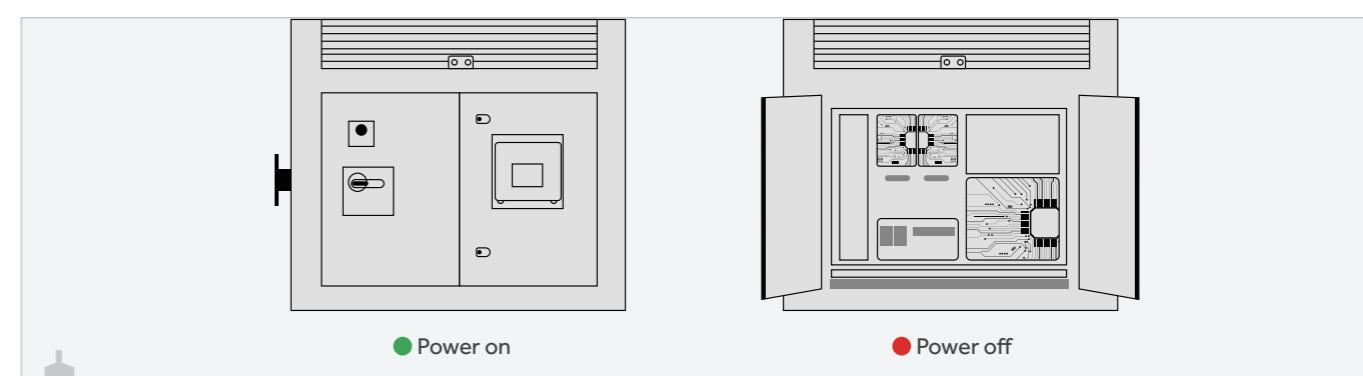

The safety control system has comprehensive protection during operation such as overcurrent and overvoltage, evaporator and condenser anti-freeze protection, discharge temperature overheat, phase monitoring that provides protection against phaseloss, phase reversal, and phase unbalance, ect. which above protections function design to guarantee units' stable operation.



## Quality is the first priority

To ensure the long-term reliable operation of the unit, Haier products undergo rigorous simulation tests on critical components in collaboration with specialized laboratories. Additionally, transportation simulation tests are conducted on vibrating tables in the laboratory.




## Super Convenience

### User-friendly controller

The unit equipped with 5-inch touch screen, that delivers capabilities of controlling and monitoring the unit operations. Users can easily access the unit operation parameters via touch screen. These parameters are helpful for after service to diagnose the system. If control system detects failure, the related code will be recorded, which is convenient for fast troubleshooting.

Control panel supports Modbus protocol, with which unit can seamlessly connect with the Building Automation System.


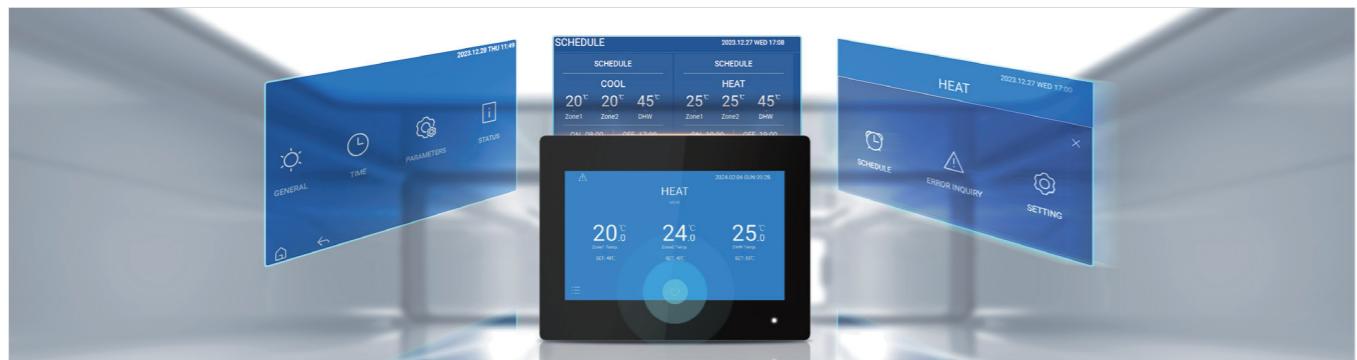


### Easy installation and maintenance

Water pipe extension that can be easily installed without the need to remove the panels.

The electrical box is hinged door design that makes maintenance and commissioning more convenient.

The unit can control a 3-port valve water side, auxiliary heat source and the electric heater in the DHW tank.

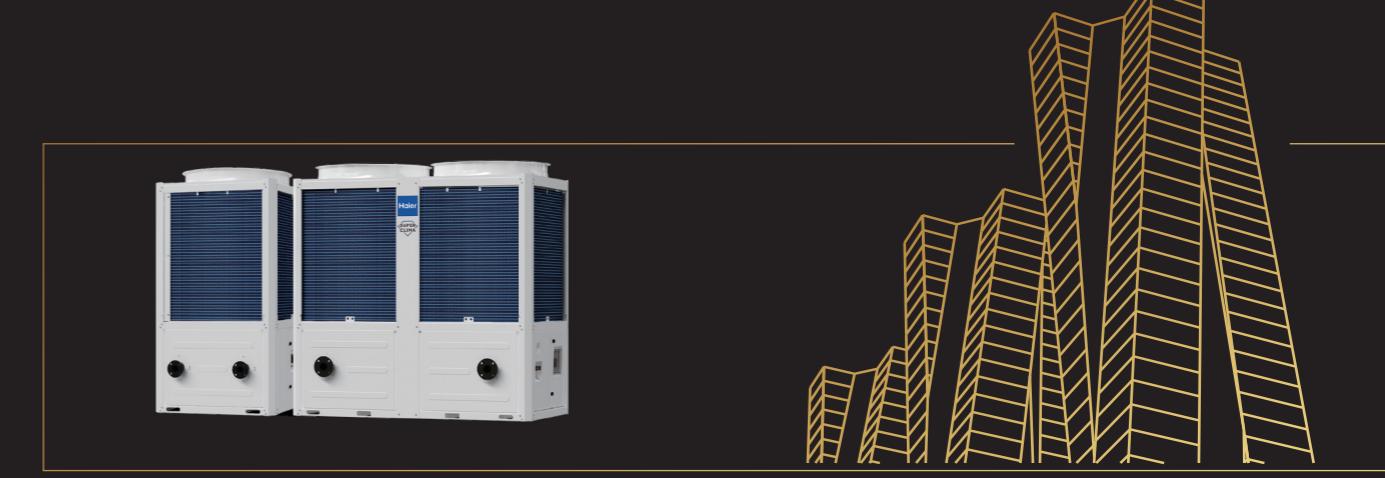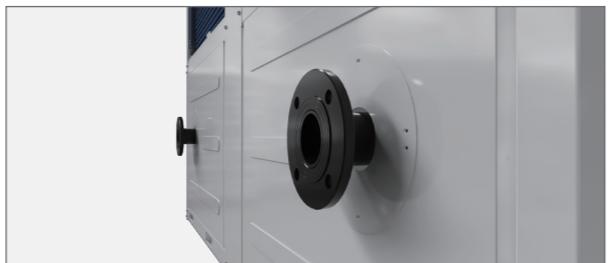

MODEL	CA0070HANH	CA0100HANH	CA0140HANH
Cooling (LWT 7°C/OAT 35°C)	Capacity kW	65.0	100.0
	Power Input kW	22.03	28.60
	EER W/W	2.95	3.50
Cooling (LWT 18°C/OAT 35°C)	Capacity kW	73.0	110.0
	Power Input kW	18.96	23.40
	EER W/W	3.85	4.70
Heating (LWT 35°C/OAT 7°C)	Capacity kW	71.0	100.0
	Power Input kW	16.14	20.00
	COP W/W	4.40	5.00
Heating (LWT 45°C/OAT 7°C)	Capacity kW	71.0	100.0
	Power Input kW	18.93	24.20
	COP W/W	3.75	4.13
Heating (LWT 55°C/OAT 7°C)	Capacity kW	71.0	100.0
	Power Input kW	22.90	29.10
	COP W/W	3.10	3.44
Seasonal Energy Efficiency	SEER W/W	4.60	4.88
	$\eta_{s,c}$ %	181	192
	SCOP (35°C) W/W	4.51	4.85
	$\eta_{s,h}$ %	178	191
	SCOP (55°C) W/W	3.65	3.85
	$\eta_{s,h}$ %	143	151
	Cooling °C	-20-53°C	
Operating Temperature Range	Heating °C	-30-50°C	
	DHW °C	-30-50°C	
	Cooling °C	-5-20°C	
Leaving Water Temperature Range	Heating °C	20-60°C	
	DHW °C	20-58°C	
Power Supply		3N~/380~415V/50Hz	
Sound Power Level		dB 88	88
Sound Pressure Level		dB(A) 71	70
Waterside Heat Exchanger Type		-	Shell & Tube Heat Exchanger
Airside Heat Exchanger Type		-	Copper Tube & Aluminum Fin
Refrigerant Throttle Type		-	Electronic Expansion Valve
Compressor	Type	-	Inverter Scroll Compressor
	Qty.	1	2
	Type	-	R32
Refrigerant	Charge kg	10	11*2
	CO <sub>2</sub> e t	6.75	14.85
Fan	Type	-	Axial
	Motor Type	-	DC Motor
	Airflow Rate m <sup>3</sup> /h	25400	20500
Water System	Qty.	1	2
	Water Resistance kPa	53	30
	Water Flow Rate (Cooling) m <sup>3</sup> /h	11.20	17.20
	Water Flow Rate(Heating) m <sup>3</sup> /h	12.20	17.20
	Max. Pressure MPa	1	1
Water Pipe Size (Inlet/Outlet)		DN65/DN50	DN65/DN65
External Dimension	W*D*H mm	1260*1210*2260	2260*1255*2260
Packing Dimension	W*D*H mm	1280*1230*2400	2280*1275*2400
Weight	Net Weight kg	500	910
	Gross Weight kg	515	940
	Operating Weight kg	525	973

Note:

1. Haier reserves the right to change these specifications without prior notice.

2. Ratings calculated according to EN14511 and EN14825.

3.  $\eta_s$  calculated according to Ecodesign regulation for chillers comfort cooling and heating (813/2013, 2016/2281).

4. Ecodesign figures are calculated at variable water flow rate.




5. Sound data is tested in Haier lab, which may vary according to different installation conditions.

6. The pressure drop parameters listed in the table do not account for the pressure drop of the included water filter.



7. CA0100HANH/CA0140HANH have two independent refrigerant circuit.

8. For further information, please contact Haier staff.

# Dimensions

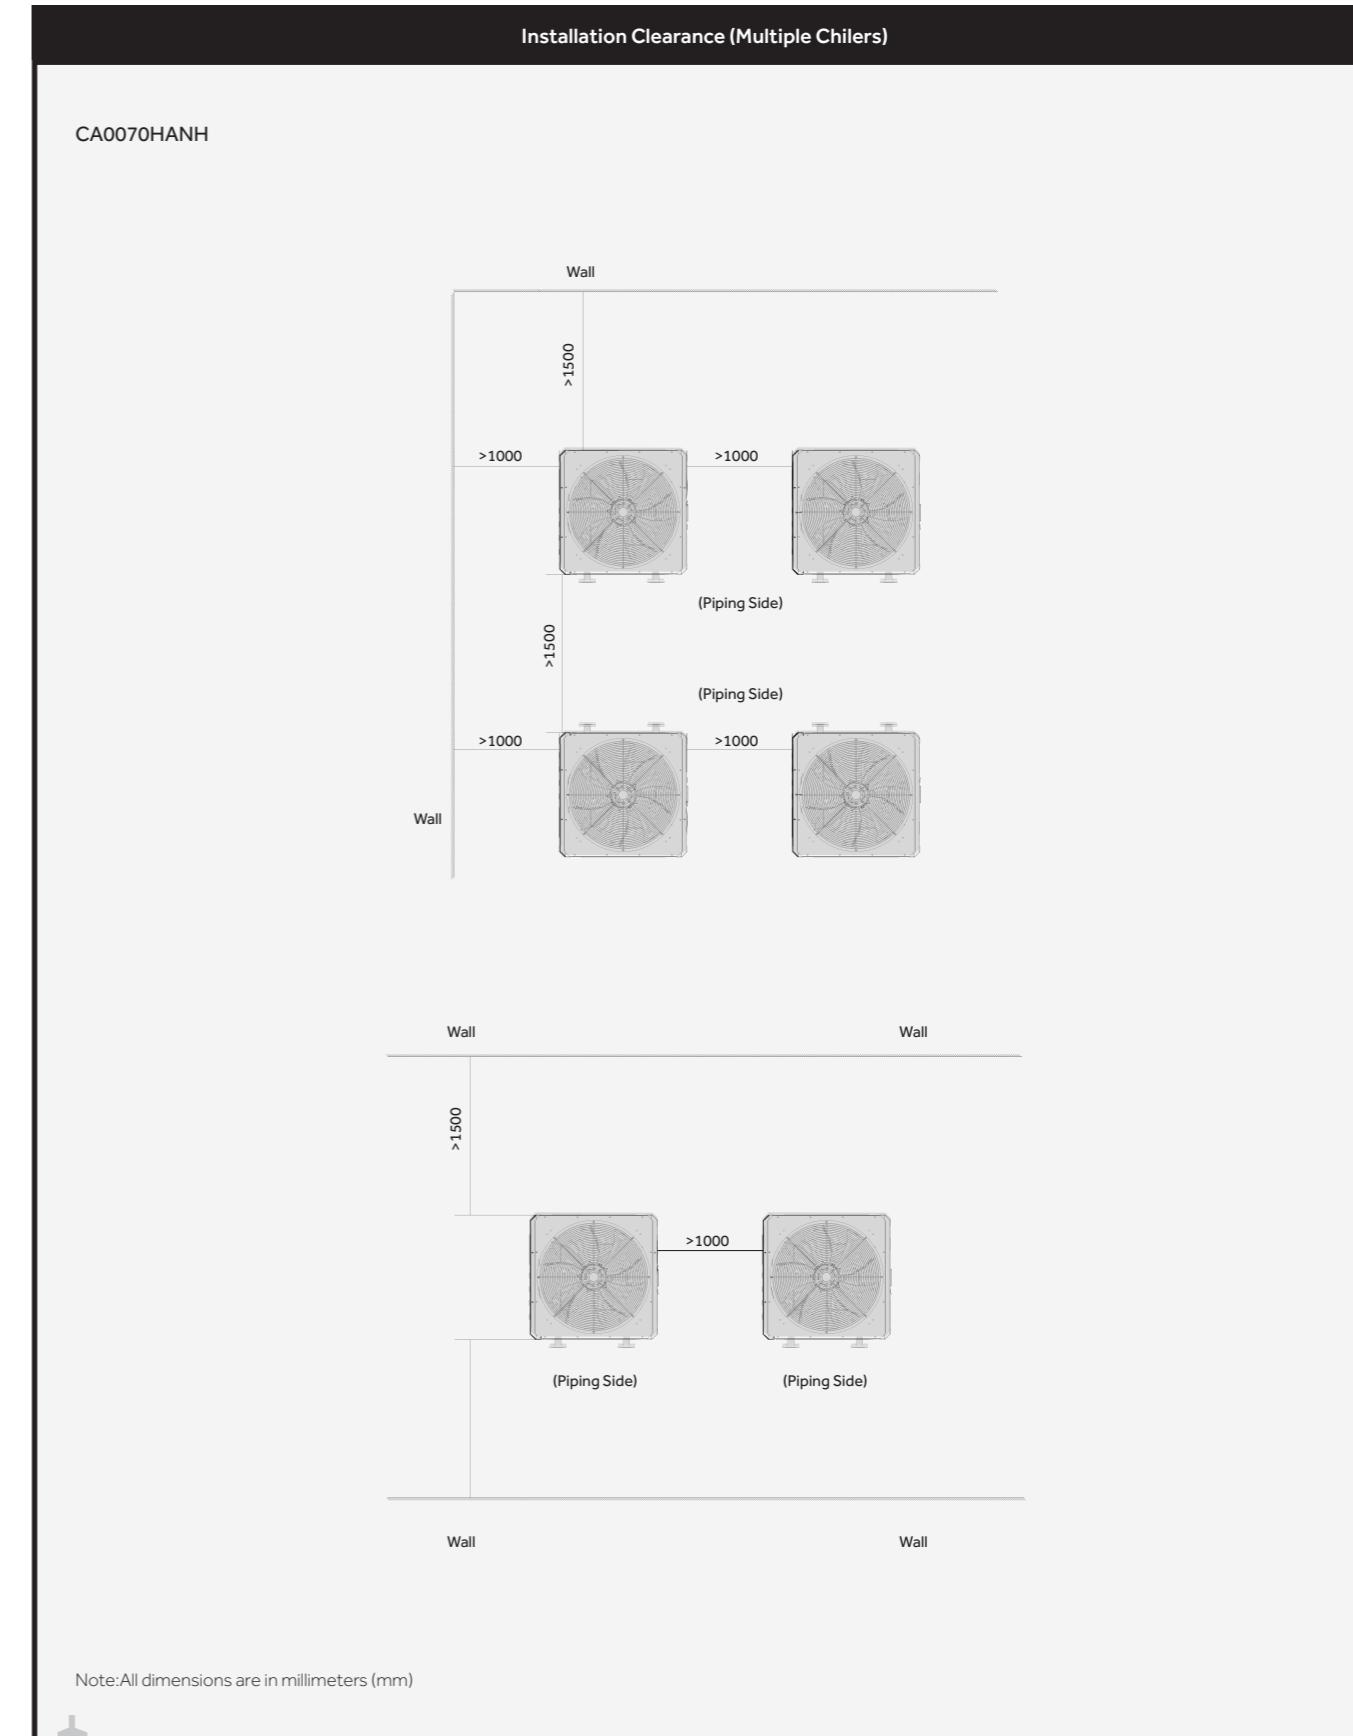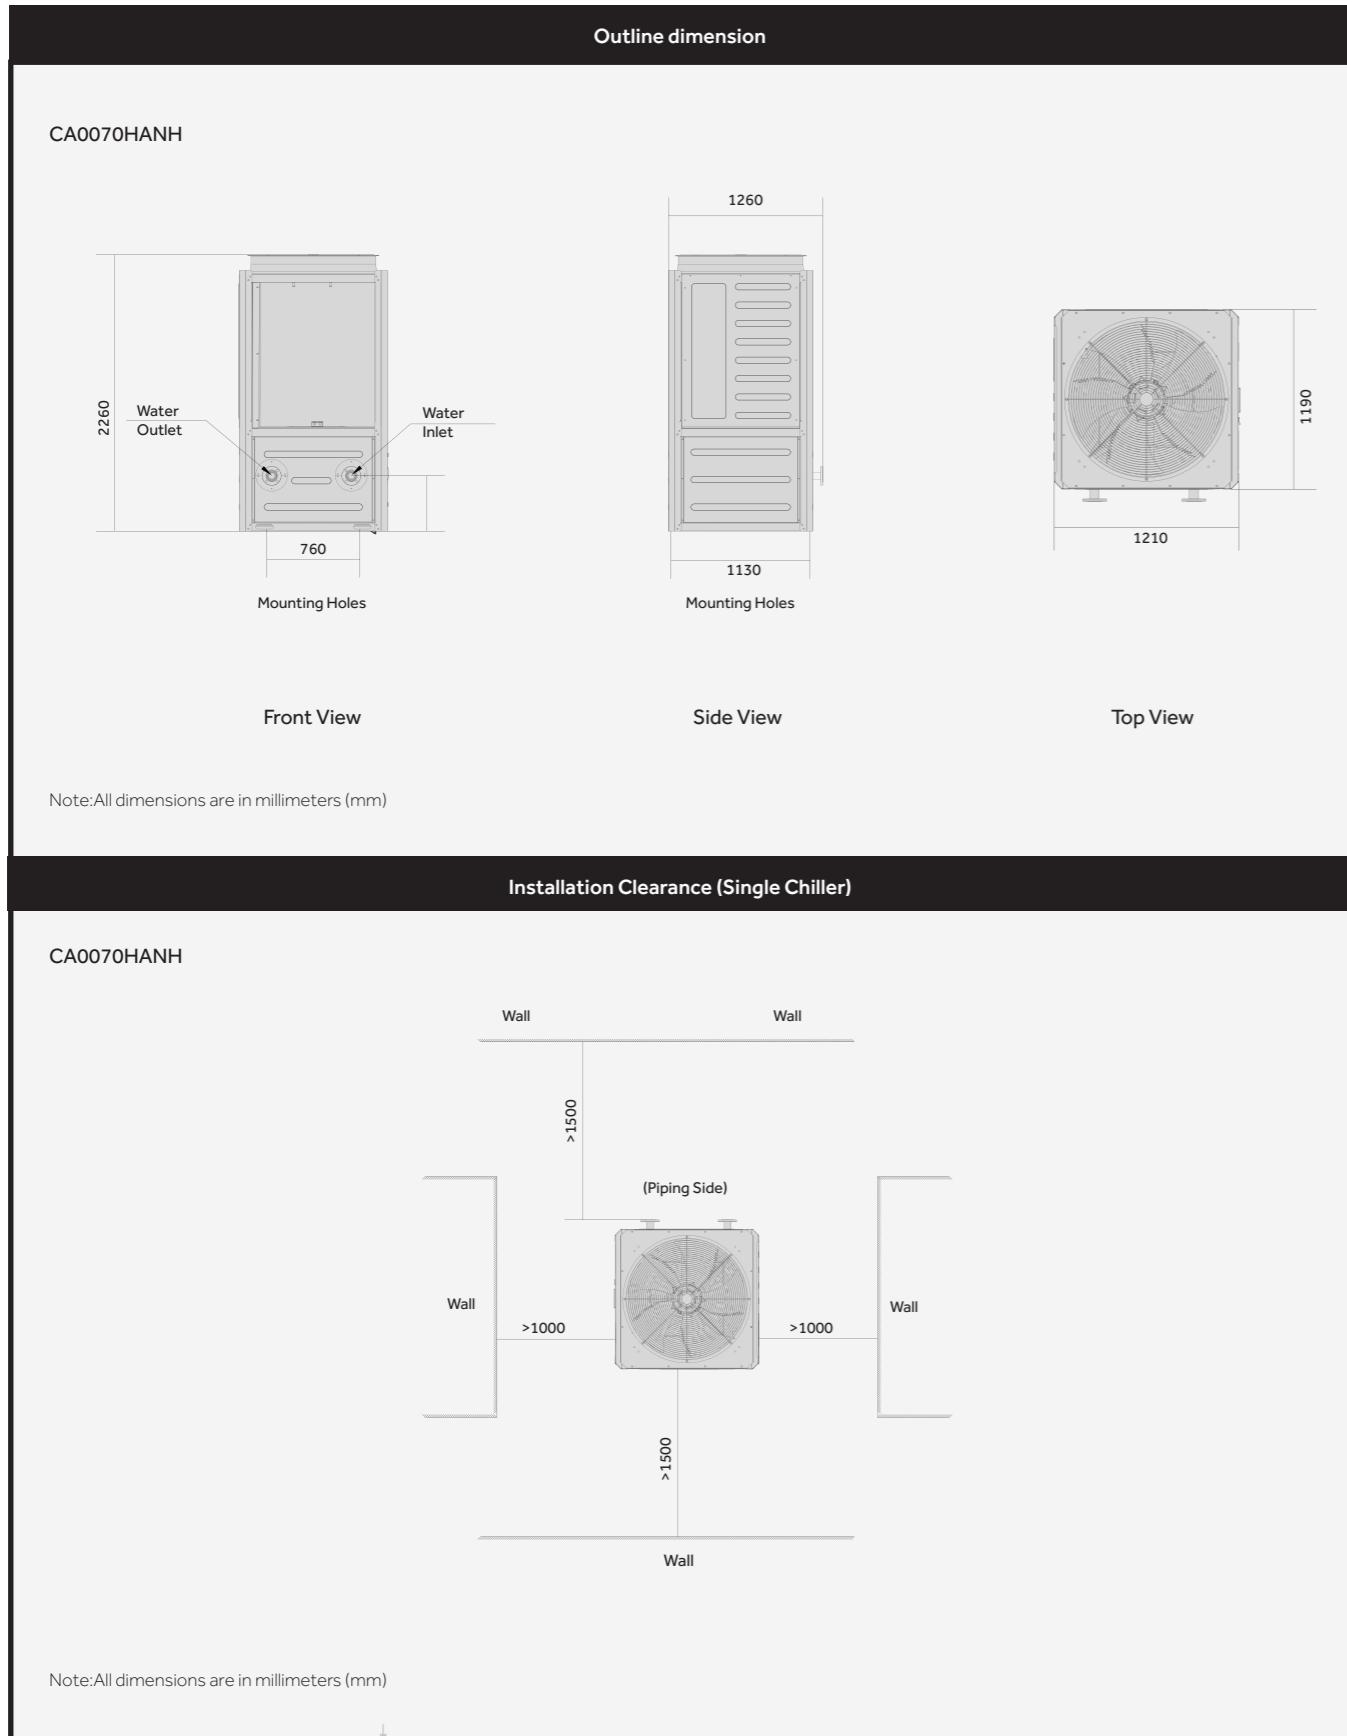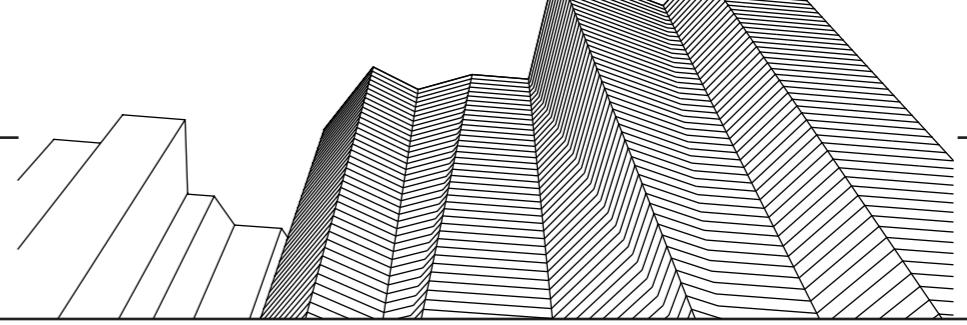

# Dimensions

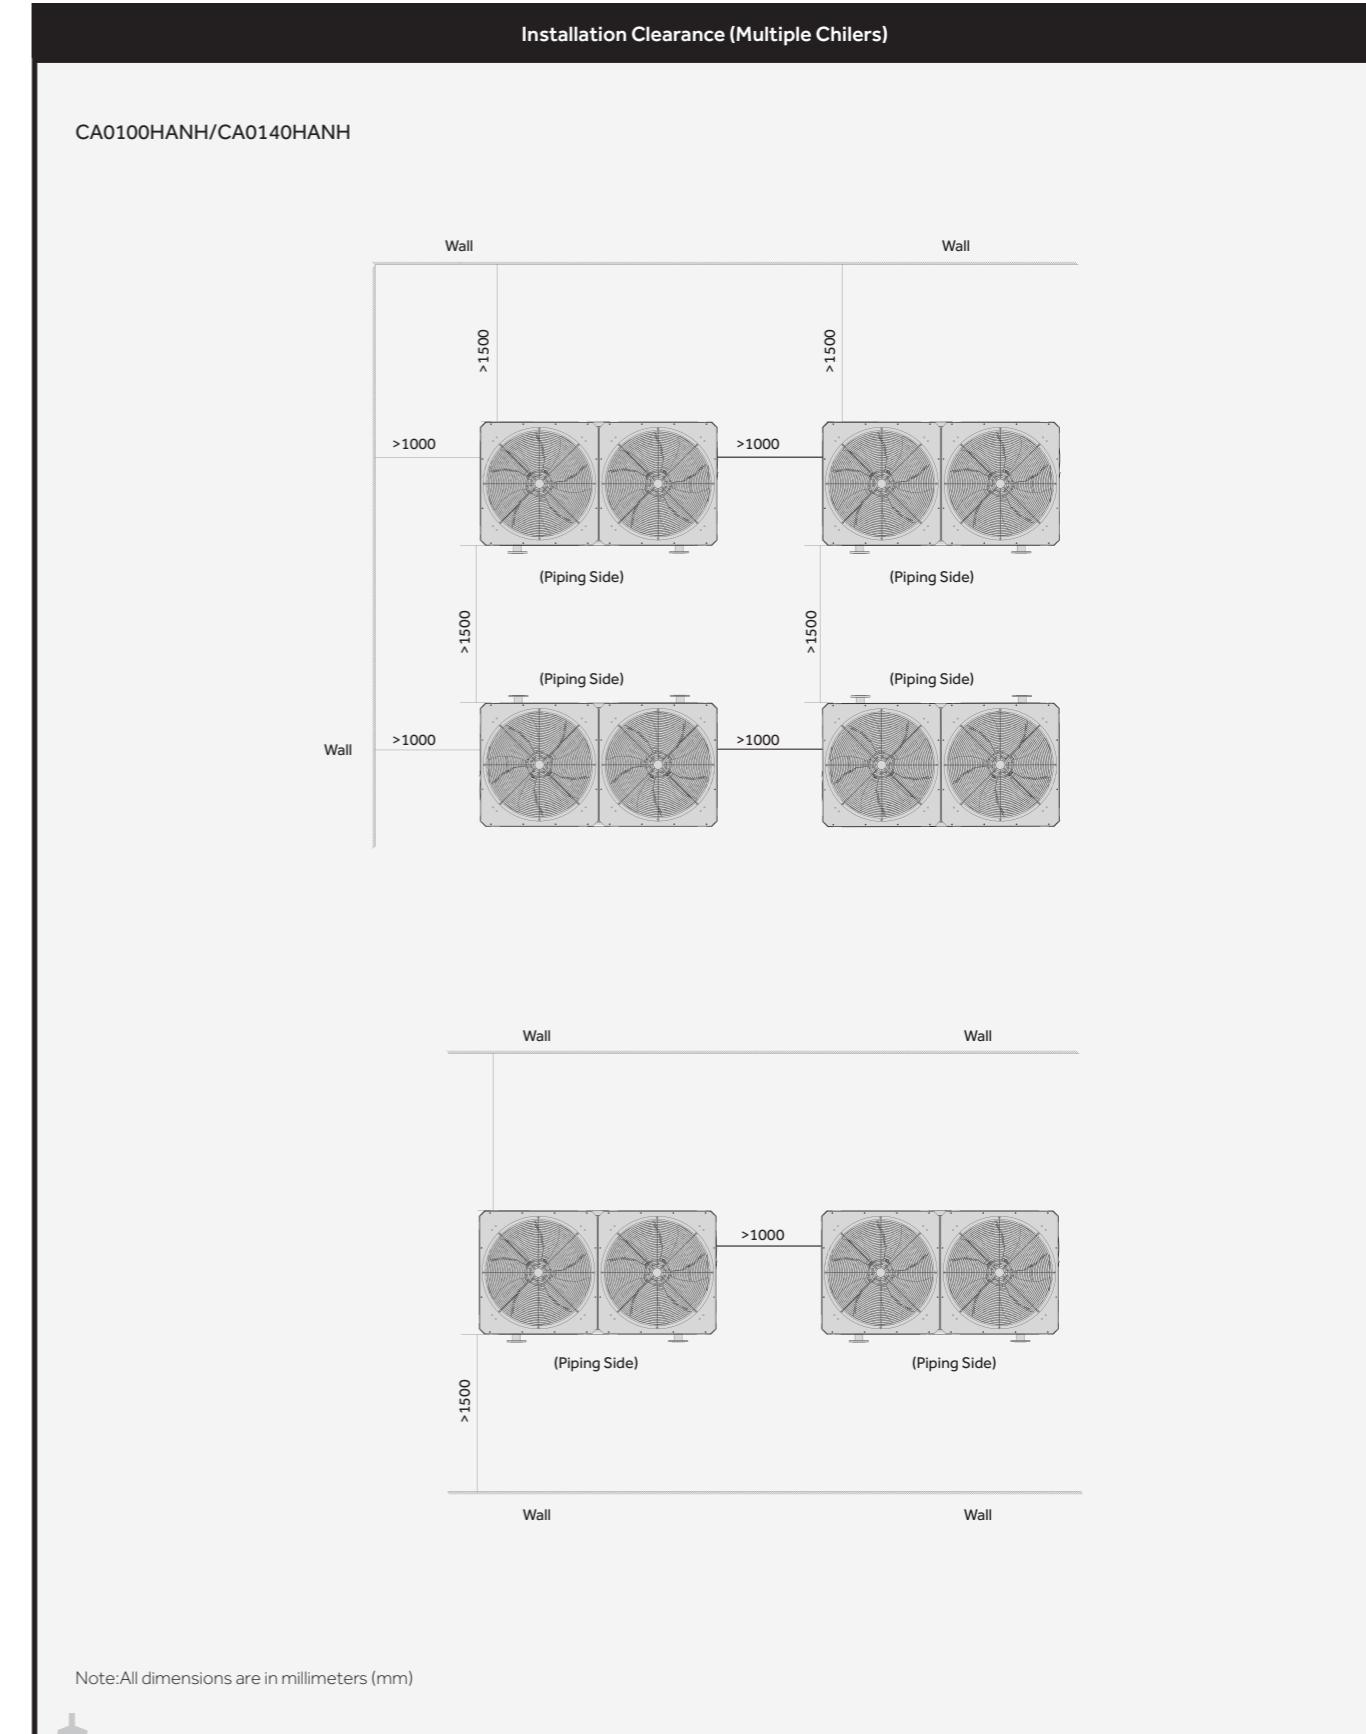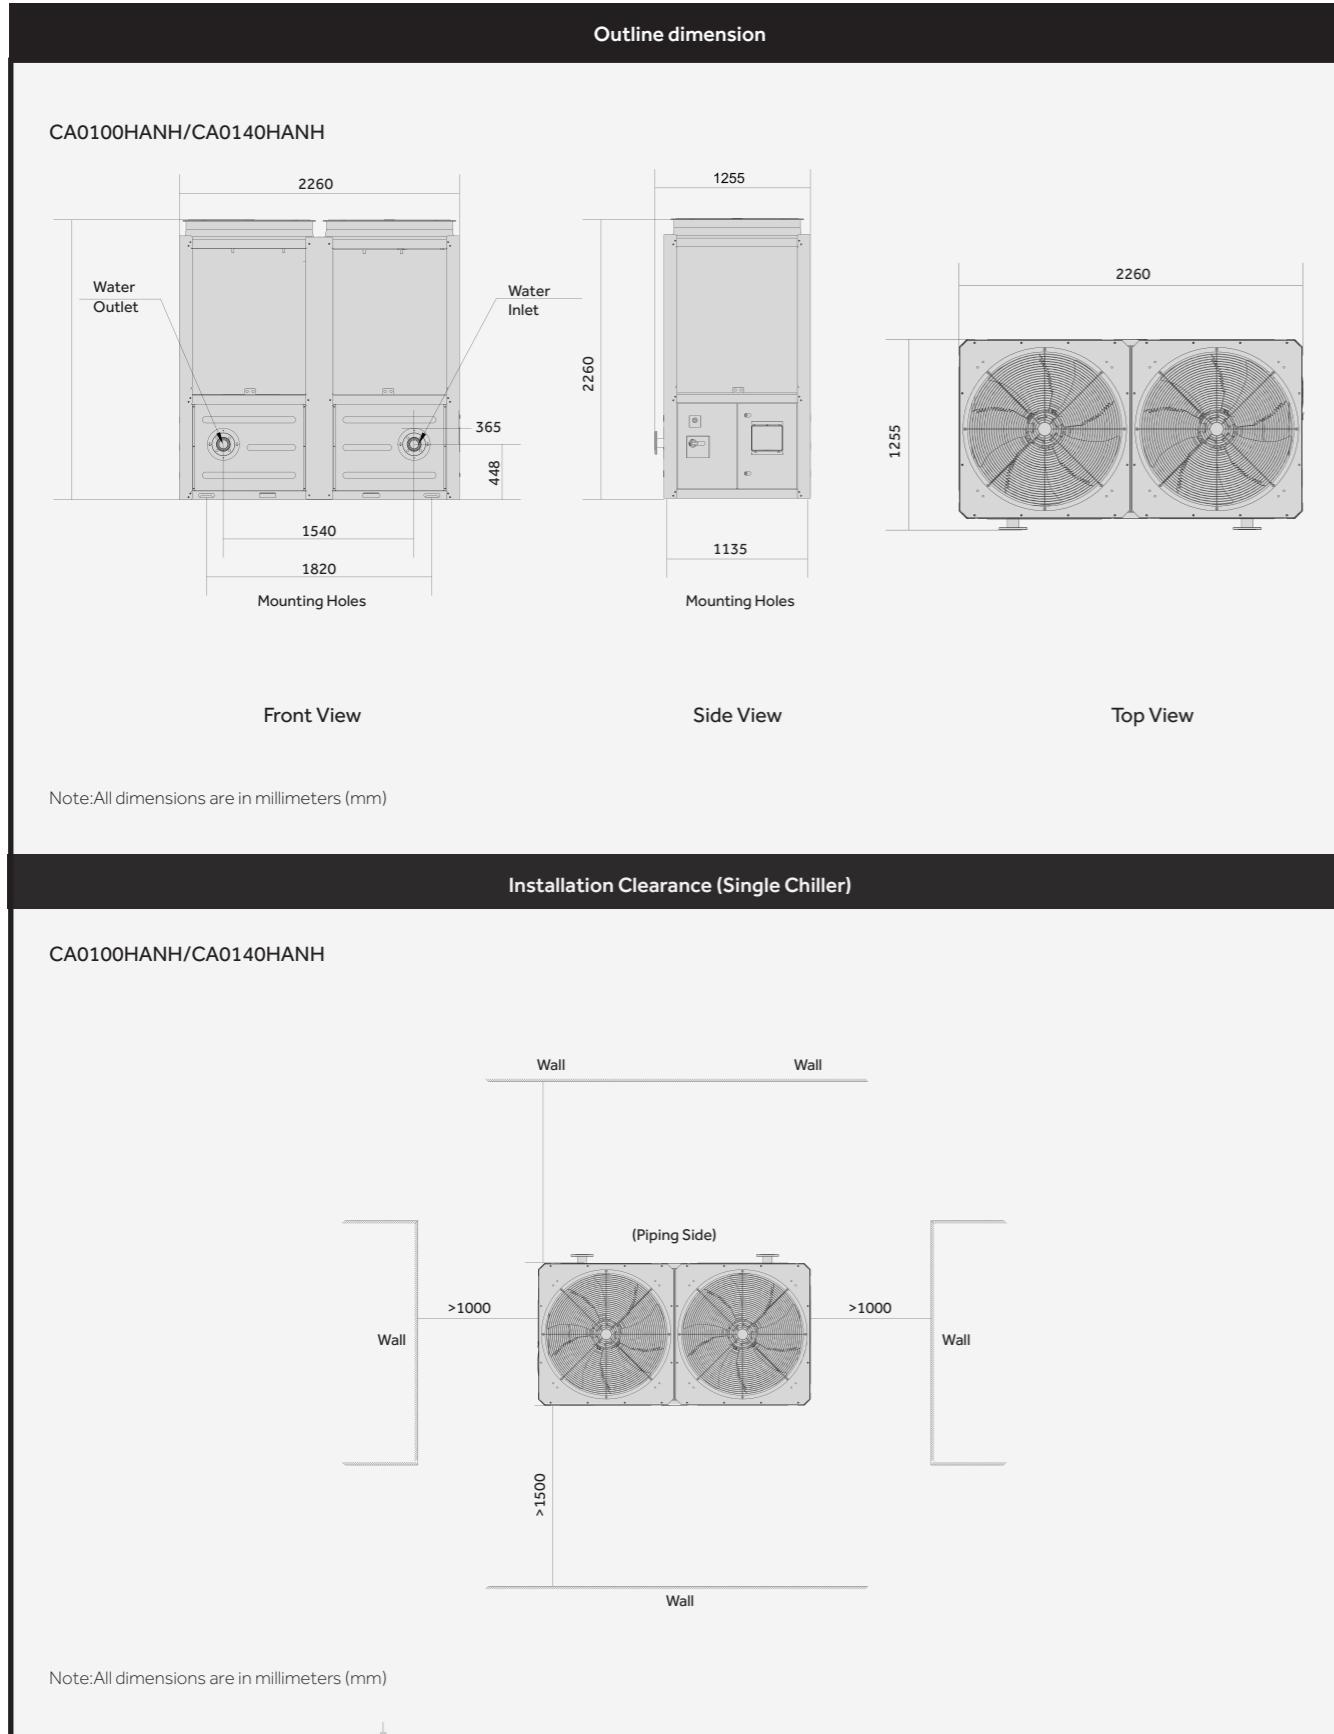

## FAN COIL UNITS & AIR HANDLING UNITS




**128** Ceiling Concealed Fan Coil

**138** Round Way Hydro Cassette

**144** Air Handling Unit

**162** Modular Air Handling Unit

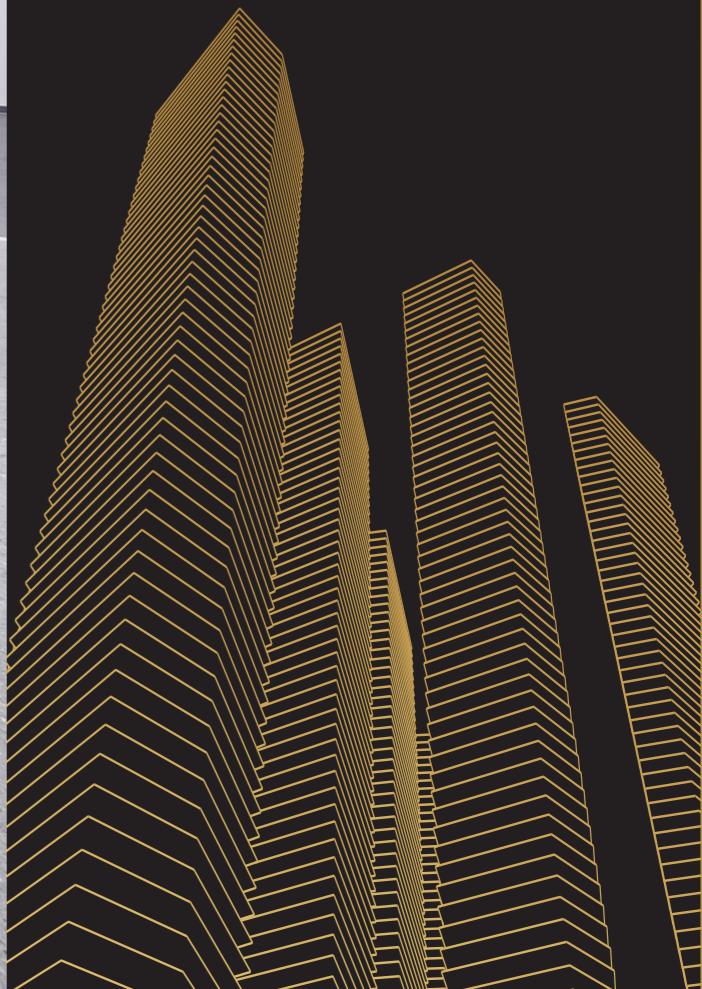

## Ceiling Concealed Fan Coil



### ☒ Nomenclature

FC E-051 A C N 2 B

- Fan coil
- Type of unit:  
E-Ceiling concealed horizontal type
- Airflow:  $\times 10\text{m}^3/\text{h}$
- External static pressure:  
A-0 or 12Pa  
B-30Pa  
C-50Pa
- Design serial number
- Power supply:  
2-1/220-240V/50Hz
- Air return type:  
B-Rear type  
D-Bottom type  
N-Without air return box
- Installation type:  
C-Concealed

### ✓ High Reliability

#### Steel fan and housing

The fan and housing take steel material design to raise fire protection rating.



### ☒ Convenient



#### Optional three way valve

Haier can supply the three way valve to match with the fan coil on customer request, giving the flexibility for design work.




#### Personalized customization

The unit provides different ESP, air return boxes, filters and enlarged water pan as optional to meet different requirements.

### Flexible design

#### 1 Optional ESP


According to customer need, the products ESP can be 50Pa, 12Pa or 30pa as optional.

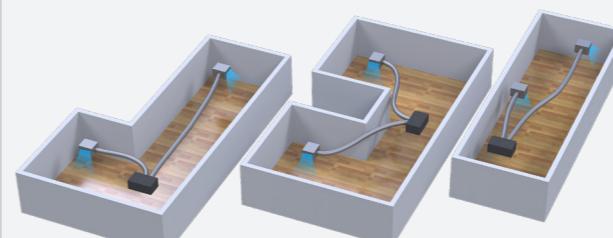

#### 2 Return air box

Friendly design of rear air return or bottom air return is available.



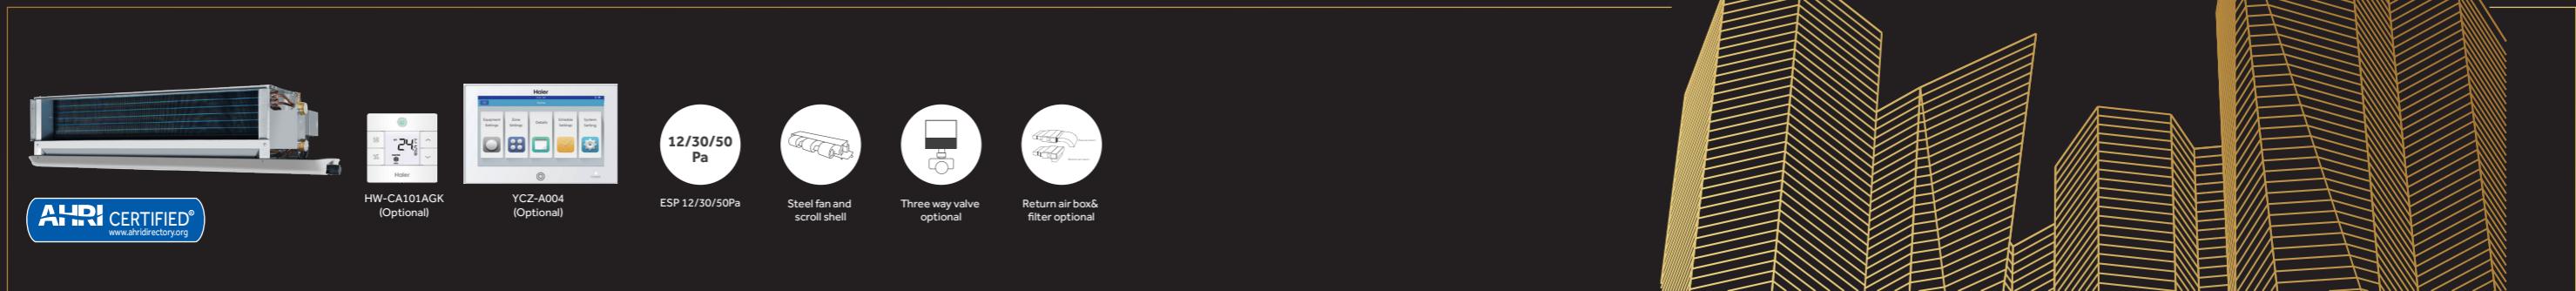

MODEL	No air return box&filter		FCE-034CCN2B	FCE-051CCN2B	FCE-068CCN2B	FCE-085CCN2B		FCE-102CCN2B	FCE-136CCN2B	FCE-170CCN2B	FCE-204CCN2B	FCE-238CCN2B
	Rear air return box&filter		FCE-034CCB2B	FCE-051CCB2B	FCE-068CCB2B	FCE-085CCB2B		FCE-102CCB2B	FCE-136CCB2B	FCE-170CCB2B	FCE-204CCB2B	FCE-238CCB2B
	Bottom air return box&filter		FCE-034CCD2B	FCE-051CCD2B	FCE-068CCD2B	FCE-085CCD2B		FCE-102CCD2B	FCE-136CCD2B	FCE-170CCD2B	FCE-204CCD2B	FCE-238CCD2B
Air volume m³/h	H	340	510	680	850		1020	1360	1700	2040	2380	
	M	258	388	517	646		775	1034	1292	1550	1809	
	L	177	265	354	442		530	707	884	1061	1238	
ESP pa	50		50									
Cooling capacity W	H	2410	3550	4550	5510		6200	8600	10800	12000	13200	
	M	2169	3195	4095	4959		5580	7740	9720	10800	11880	
	L	1783	2627	3367	4077		4588	6364	7992	8880	9768	
Heating capacity W	H	3700	5600	7450	8800		10200	13800	17500	21000	22500	
	M	3219	4872	6482	7656		8874	12006	15225	18270	19575	
	L	2701	4088	5439	6424		7446	10074	12775	15330	16425	
Power input W	H	49	66	84	100		118	174	210	250	300	
Power supply Ph/V/Hz	1/220-240/50										1/220-240/50	
Noise level dB(A)	H	42	44	46	47		49	50	52	54	55	
Water flow l/min		6.9	10.2	13.0	15.8		17.8	24.7	31.0	34.4	37.8	
Water pressure drop kPa		30	30	30	30		40	40	40	40	50	
Water inlet/outlet connection pipe	Rc3/4"										Rc3/4"	
Condensate water connection pipe	R3/4"										R3/4"	
Net weight (no air return box) kg		11.6	14.1	15.8	17.5		18.4	26.2	29.1	32.8	35.1	
Gross weight (no air return box) kg		13.9	16.6	18.5	20.4		21.6	30.1	33.4	38.1	40.4	
Net weight (with air return box) kg		14.2	17.2	19.2	21.2		22.5	31.4	34.8	39.2	42.2	
Gross weight (with air return box) kg		16.4	19.4	21.6	23.8		25.5	34.7	38.5	44.0	46.9	
Net dimension (L/W/H) (no air return box) mm		693/470/225	823/470/225	928/470/225	1013/470/225		1143/470/225	1443/470/225	1593/470/225	1813/470/225	2013/470/225	
Shipping dimension (L/W/H) (no air return box) mm		740/542/248	870/542/248	975/542/248	1060/542/248		1190/542/248	1490/542/248	1640/542/248	1860/542/248	2060/542/248	
Net dimension (L/W/H) (with rear air return box) mm		693/511/225	823/511/225	928/511/225	1013/511/225		1143/511/225	1443/511/225	1593/511/225	1813/511/225	2013/511/225	
Shipping dimension (L/W/H) (with rear air return box) mm		740/542/248	870/542/248	975/542/248	1060/542/248		1190/542/248	1490/542/248	1640/542/248	1860/542/248	2060/542/248	
Net dimension (L/W/H) (with bottom air return box) mm		693/492/246	823/492/246	928/492/246	1013/492/246		1143/492/246	1443/492/246	1593/492/246	1813/492/246	2013/492/246	
Shipping dimension (L/W/H) (with bottom air return box) mm		740/522/263	870/522/263	975/522/263	1060/522/263		1190/522/263	1490/522/263	1640/522/263	1860/522/263	2060/522/263	
Controller (optional)	Wired	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK		HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	
Three way valve (optional)		3VFCE	3VFCE	3VFCE	3VFCE		3VFCE	3VFCE	3VFCE	3VFCE	3VFCE	

Options: 1.Three way valve; 2. The enlarged drain pan ;


Note: 1. Specifications are based on the following conditions: Cooling: Dry bulb temperature 27°C, wet bulb temperature 19.5°C, the water inlet temperature 7°C, 5°C temperature difference between water inlet and water outlet; Heating: Dry bulb temperature 21°C, the water inlet temperature 60°C, the water flow is the same to that at the cooling test condition.

2. The sound pressure level is measured in a semi-anechoic chamber by units without air return box & filter. The measured sound pressure level may be different from the data in the table due to the using condition or other reasons. The sound pressure level of the unit with the air return box & filter is higher than that of the unit without the air return box & filter.

3. The ESP, air volume, cooling and heating capacity of the above table are measured by the units without the air return box & filter. For the units with the air return box & filter, the air volume, cooling and heating capacity shall be multiplied by the correction factor of 0.9.

4. The unit has left water inlet or right water inlet type, which can be temporarily adjusted on site. It is not recommended to adjust, because the cooling and heating capacity shall be multiplied by the correction factor of 0.92 after the adjustment.

5. Due to our policy of innovation, some specifications may be changed without notification.

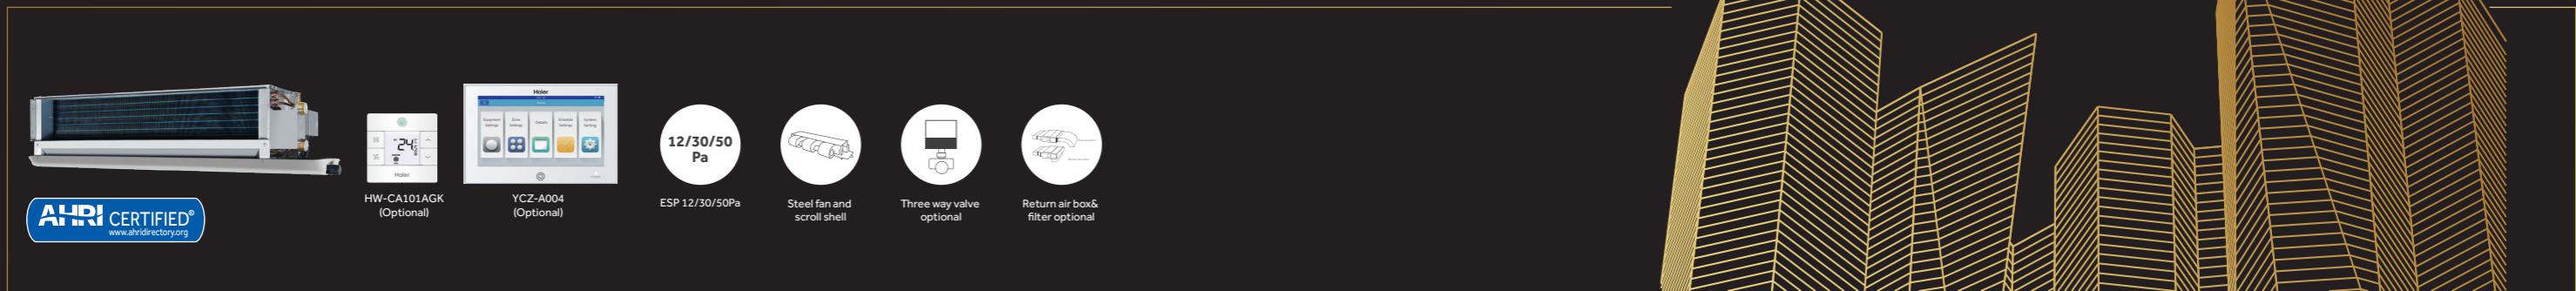

MODEL	No air return box&filter		FCE-034BCN2B	FCE-051BCN2B	FCE-068BCN2B	FCE-085BCN2B		FCE-102BCN2B	FCE-136BCN2B	FCE-170BCN2B	FCE-204BCN2B	FCE-238BCN2B
	Rear air return box&filter		FCE-034BCB2B	FCE-051BCB2B	FCE-068BCB2B	FCE-085BCB2B		FCE-102BCB2B	FCE-136BCB2B	FCE-170BCB2B	FCE-204BCB2B	FCE-238BCB2B
	Bottom air return box&filter		FCE-034BCD2B	FCE-051BCD2B	FCE-068BCD2B	FCE-085BCD2B		FCE-102BCD2B	FCE-136BCD2B	FCE-170BCD2B	FCE-204BCD2B	FCE-238BCD2B
Air volume m³/h	H	340	510	680	850		1020	1360	1700	2040	2380	
	M	258	388	517	646		775	1034	1292	1550	1809	
	L	177	265	354	442		530	707	884	1061	1238	
ESP pa	30		30									
Cooling capacity W	H	2410	3550	4550	5510		6200	8600	10800	12000	13200	
	M	2169	3195	4095	4959		5580	7740	9720	10800	11880	
	L	1783	2627	3367	4077		4588	6364	7992	8880	9768	
Heating capacity W	H	3700	5600	7450	8800		10200	13800	17500	21000	22500	
	M	3219	4872	6482	7656		8874	12006	15225	18270	19575	
	L	2701	4088	5439	6424		7446	10074	12775	15330	16425	
Power input W	H	44	59	72	87		108	156	174	212	253	
Power supply	Ph/V/Hz		1/220-240/50									
Noise level dB(A)	H	39	42	43	45		47	48	50	52	54	
Water flow l/min		6.9	10.2	13.0	15.8		17.8	24.7	31.0	34.4	37.8	
Water pressure drop kPa		30	30	30	30		40	40	40	40	50	
Water inlet/outlet connection pipe		Rc3/4"										Rc3/4"
Condensate water connection pipe		R3/4"										R3/4"
Net weight (no air return box)	kg	11.6	14.1	15.8	17.5		18.4	26.2	29.1	32.8	35.1	
Gross weight (no air return box)	kg	13.9	16.6	18.5	20.4		21.6	30.1	33.4	38.1	40.4	
Net weight (with air return box)	kg	14.2	17.2	19.2	21.2		22.5	31.4	34.8	39.2	42.2	
Gross weight (with air return box)	kg	16.4	19.4	21.6	23.8		25.5	34.7	38.5	44.0	46.9	
Net dimension (L/W/H) (no air return box)	mm	693/470/225	823/470/225	928/470/225	1013/470/225		1143/470/225	1443/470/225	1593/470/225	1813/470/225	2013/470/225	
Shipping dimension (L/W/H) (no air return box)	mm	740/542/248	870/542/248	975/542/248	1060/542/248		1190/542/248	1490/542/248	1640/542/248	1860/542/248	2060/542/248	
Net dimension (L/W/H) (with rear air return box)	mm	693/511/225	823/511/225	928/511/225	1013/511/225		1143/511/225	1443/511/225	1593/511/225	1813/511/225	2013/511/225	
Shipping dimension (L/W/H) (with rear air return box)	mm	740/542/248	870/542/248	975/542/248	1060/542/248		1190/542/248	1490/542/248	1640/542/248	1860/542/248	2060/542/248	
Net dimension (L/W/H) (with bottom air return box)	mm	693/492/246	823/492/246	928/492/246	1013/492/246		1143/492/246	1443/492/246	1593/492/246	1813/492/246	2013/492/246	
Shipping dimension (L/W/H) (with bottom air return box)	mm	740/522/263	870/522/263	975/522/263	1060/522/263		1190/522/263	1490/522/263	1640/522/263	1860/522/263	2060/522/263	
Controller (optional)	Wired	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK		HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	
Three way valve (optional)		3VFCE	3VFCE	3VFCE	3VFCE		3VFCE	3VFCE	3VFCE	3VFCE	3VFCE	

Options: 1.Three way valve; 2. The enlarged drain pan.


Note: 1. Specifications are based on the following conditions: Cooling: Dry bulb temperature 27°C, wet bulb temperature 19.5°C, the water inlet temperature 7°C, 5°C temperature difference between water inlet and water outlet; Heating: Dry bulb temperature 21°C, the water inlet temperature 60°C, the water flow is the same to that at the cooling test condition.

2. The sound pressure level is measured in a semi-anechoic chamber by units without air return box & filter. The measured sound pressure level may be different from the data in the table due to the using condition or other reasons. The sound pressure level of the unit with the air return box & filter is higher than that of the unit without the air return box & filter.

3. The ESP, air volume, cooling and heating capacity of the above table are measured by the units without the air return box & filter. For the units with the air return box & filter, the air volume, cooling and heating capacity shall be multiplied by the correction factor of 0.9.

4. The unit has left water inlet or right water inlet type, which can be temporarily adjusted on site. It is not recommended to adjust, because the cooling and heating capacity shall be multiplied by the correction factor of 0.92 after the adjustment.

5. Due to our policy of innovation, some specifications may be changed without notification.

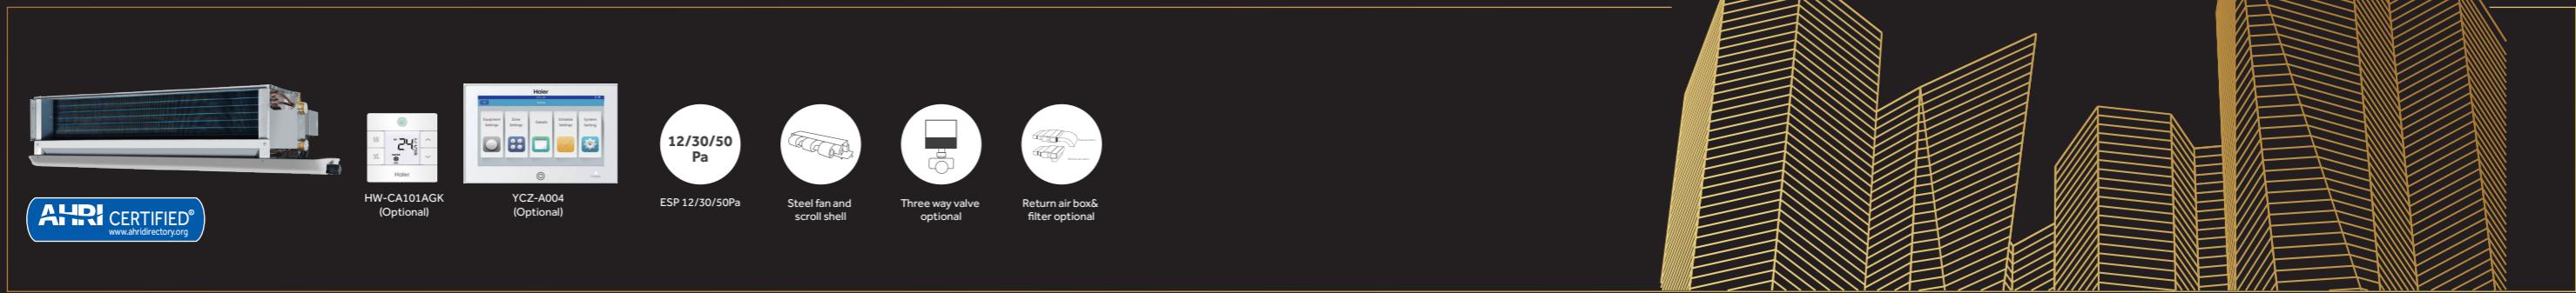

MODEL	No air return box&filter		FCE-034ACN2B	FCE-051ACN2B	FCE-068ACN2B	FCE-085ACN2B		FCE-102ACN2B	FCE-136ACN2B	FCE-170ACN2B	FCE-204ACN2B	FCE-238ACN2B
	Rear air return box&filter		FCE-034ACB2B	FCE-051ACB2B	FCE-068ACB2B	FCE-085ACB2B		FCE-102ACB2B	FCE-136ACB2B	FCE-170ACB2B	FCE-204ACB2B	FCE-238ACB2B
	Bottom air return box&filter		FCE-034ACD2B	FCE-051ACD2B	FCE-068ACD2B	FCE-085ACD2B		FCE-102ACD2B	FCE-136ACD2B	FCE-170ACD2B	FCE-204ACD2B	FCE-238ACD2B
Air volume m³/h	H	340	510	680	850			1020	1360	1700	2040	2380
	M	258	388	517	646			775	1034	1292	1550	1809
	L	177	265	354	442			530	707	884	1061	1238
ESP pa	12(without filter)/0(with filter)		12(without filter)/0(with filter)									
Cooling capacity W	H	2410	3550	4550	5510			6200	8600	10800	12000	13200
	M	2169	3195	4095	4959			5580	7740	9720	10800	11880
	L	1783	2627	3367	4077			4588	6364	7992	8880	9768
Heating capacity W	H	3700	5600	7450	8800			10200	13800	17500	21000	22500
	M	3219	4872	6482	7656			8874	12006	15225	18270	19575
	L	2701	4088	5439	6424			7446	10074	12775	15330	16425
Power input W	H	37	52	62	76			96	134	152	189	228
Power supply Ph/V/Hz	1/220-240/50										1/220-240/50	
Noise level dB(A)	H	36	38	39	43			45	46	48	50	52
Water flow l/min		6.9	10.2	13.0	15.8			17.8	24.7	31.0	34.4	37.8
Water pressure drop kPa		30	30	30	30			40	40	40	40	50
Water inlet/outlet connection pipe		Rc3/4"										Rc3/4"
Condensate water connection pipe		R3/4"										R3/4"
Net weight (no air return box)	kg	11.6	14.1	15.8	17.5			18.4	26.2	29.1	32.8	35.1
Gross weight (no air return box)	kg	13.9	16.6	18.5	20.4			21.6	30.1	33.4	38.1	40.4
Net weight (with air return box)	kg	14.2	17.2	19.2	21.2			22.5	31.4	34.8	39.2	42.2
Gross weight (with air return box)	kg	16.4	19.4	21.6	23.8			25.5	34.7	38.5	44.0	46.9
Net dimension (L/W/H) (no air return box)	mm	693/470/225	823/470/225	928/470/225	1013/470/225			1143/470/225	1443/470/225	1593/470/225	1813/470/225	2013/470/225
Shipping dimension (L/W/H) (no air return box)	mm	740/542/248	870/542/248	975/542/248	1060/542/248			1190/542/248	1490/542/248	1640/542/248	1860/542/248	2060/542/248
Net dimension (L/W/H) (with rear air return box)	mm	693/511/225	823/511/225	928/511/225	1013/511/225			1143/511/225	1443/511/225	1593/511/225	1813/511/225	2013/511/225
Shipping dimension (L/W/H) (with rear air return box)	mm	740/542/248	870/542/248	975/542/248	1060/542/248			1190/542/248	1490/542/248	1640/542/248	1860/542/248	2060/542/248
Net dimension (L/W/H) (with bottom air return box)	mm	693/492/246	823/492/246	928/492/246	1013/492/246			1143/492/246	1443/492/246	1593/492/246	1813/492/246	2013/492/246
Shipping dimension (L/W/H) (with bottom air return box)	mm	740/522/263	870/522/263	975/522/263	1060/522/263			1190/522/263	1490/522/263	1640/522/263	1860/522/263	2060/522/263
Controller (optional)	Wired	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK			HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK	HW-CA101AGK
Three way valve (optional)		3VFCE	3VFCE	3VFCE	3VFCE			3VFCE	3VFCE	3VFCE	3VFCE	3VFCE

Options: 1.Three way valve; 2. The enlarged drain pan ;

Note: 1. Specifications are based on the following conditions: Cooling: Dry bulb temperature 27°C, wet bulb temperature 19.5°C, the water inlet temperature 7°C, 5°C temperature difference between water inlet and water outlet; Heating: Dry bulb temperature 21°C, the water inlet temperature 60°C, the water flow is the same to that at the cooling test condition.


2. The sound pressure level is measured in a semi-anechoic chamber by units without air return box &filter. The measured sound pressure level may be different from the data in the table due to the using condition or other reasons. The sound pressure level of the unit with the air return box &filter is higher than that of the unit without the air return box &filter.

3. The ESP, air volume, cooling and heating capacity of the above table are measured by the units without the air return box &filter. For the units with the air return box &filter, the air volume, cooling and heating capacity shall be multiplied by the correction factor of 0.9.

4. The unit has left water inlet or right water inlet type, which can be temporarily adjusted on site. It is not recommended to adjust, because the cooling and heating capacity shall be multiplied by the correction factor of 0.92 after the adjustment.


5. Due to our policy of innovation, some specifications may be changed without notification.

# Dimensions

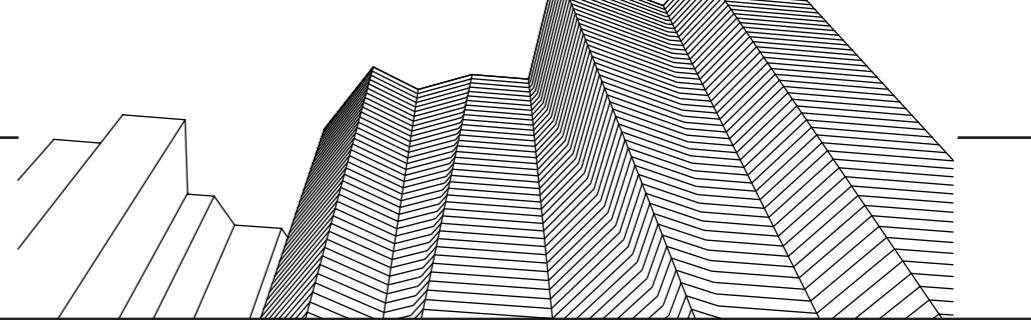


Unit dimension diagram

Ceiling concealed units

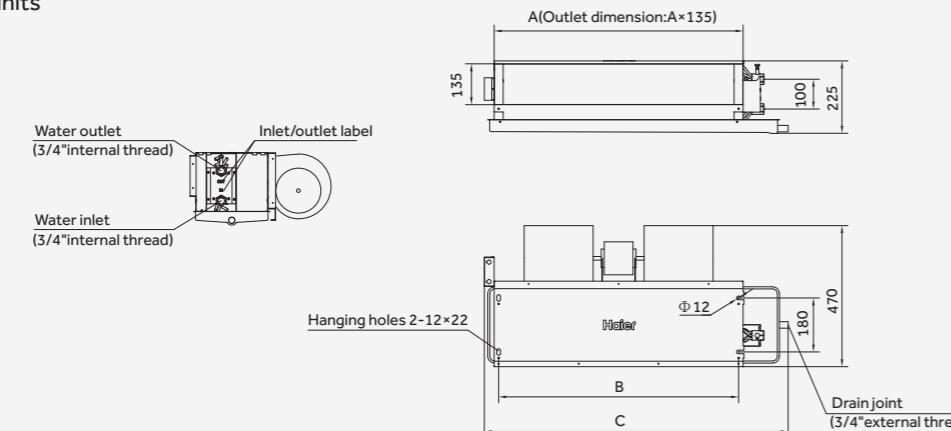

Model	Overall dimension(mm)		
	A	B	C
FCE-034	510	480	693
FCE-051	640	610	823
FCE-068	745	715	928
FCE-085	830	800	1013
FCE-102	960	930	1143
FCE-136	1260	1230	1443
FCE-170	1410	1380	1593
FCE-204	1630	1600	1813
FCE-238	1830	1800	2013


Ceiling concealed units with back return air box

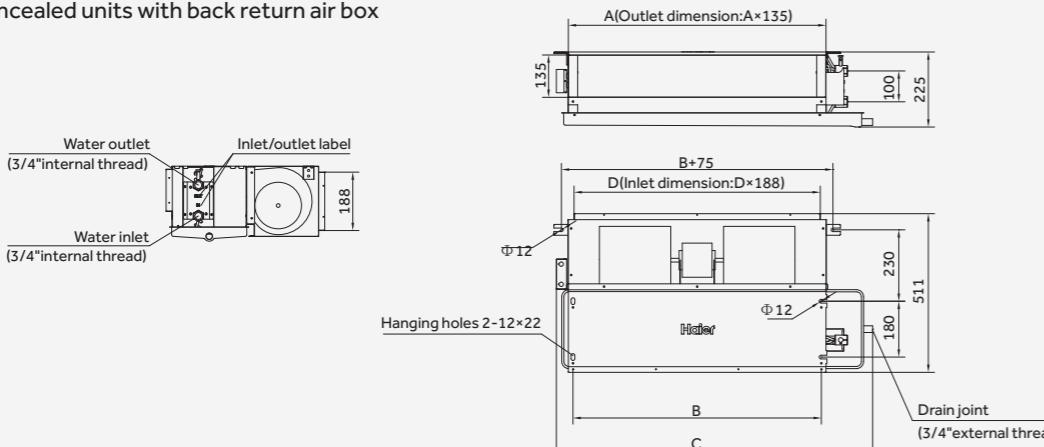

Model	Overall dimension(mm)			
	A	B	C	D
FCE-034	510	480	693	473
FCE-051	640	610	823	603
FCE-068	745	715	928	708
FCE-085	830	800	1013	793
FCE-102	960	930	1143	923
FCE-136	1260	1230	1443	1223
FCE-170	1410	1380	1593	1373
FCE-204	1630	1600	1813	1593
FCE-238	1830	1800	2013	1793


Unit dimension diagram

Ceiling concealed units with bottom return air box

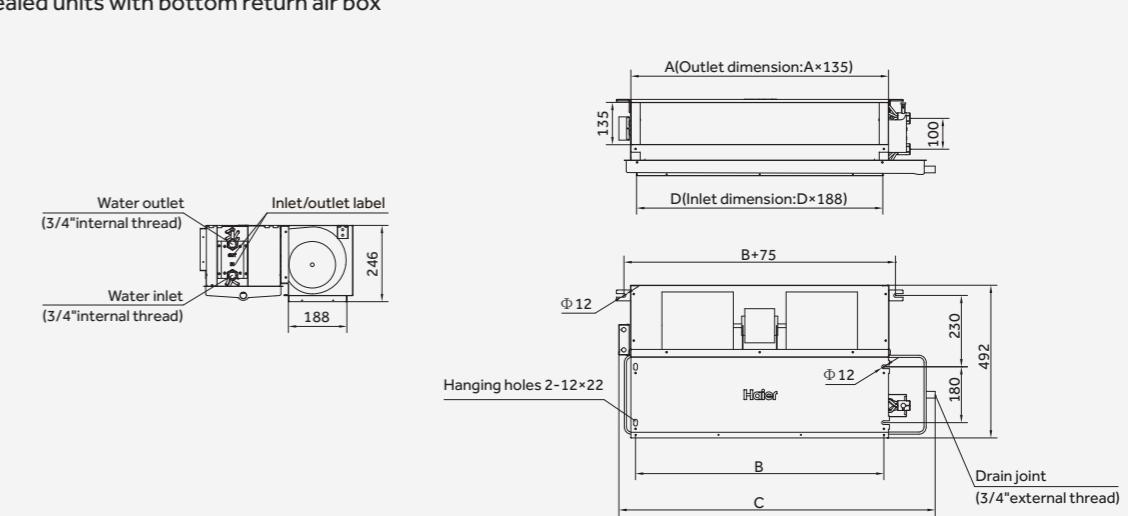

Model	Overall dimension(mm)			
	A	B	C	D
FCE-034	510	480	693	473
FCE-051	640	610	823	603
FCE-068	745	715	928	708
FCE-085	830	800	1013	793
FCE-102	960	930	1143	923
FCE-136	1260	1230	1443	1223
FCE-170	1410	1380	1593	1373
FCE-204	1630	1600	1813	1593
FCE-238	1830	1800	2013	1793

## Round Way Hydro Cassette

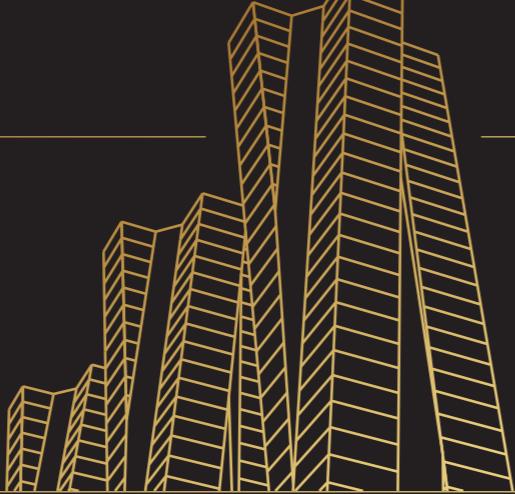

### Nomenclature



FC B-051 B C N 2 B

- Fan coil
- Type of unit:  
B-Cassette type
- Airflow:  $\times 10 \text{m}^3/\text{h}$
- External static pressure:  
B-0Pa
- Design serial number
- Power supply:  
2-1/220-240V/50Hz
- Air return type:  
B-Rear type  
D-Bottom type  
N-Without air return box
- Installation type:  
C-Concealed


### High Efficiency

#### New heat exchanger design

The area of exchanger is enlarged to increase heating efficiency.

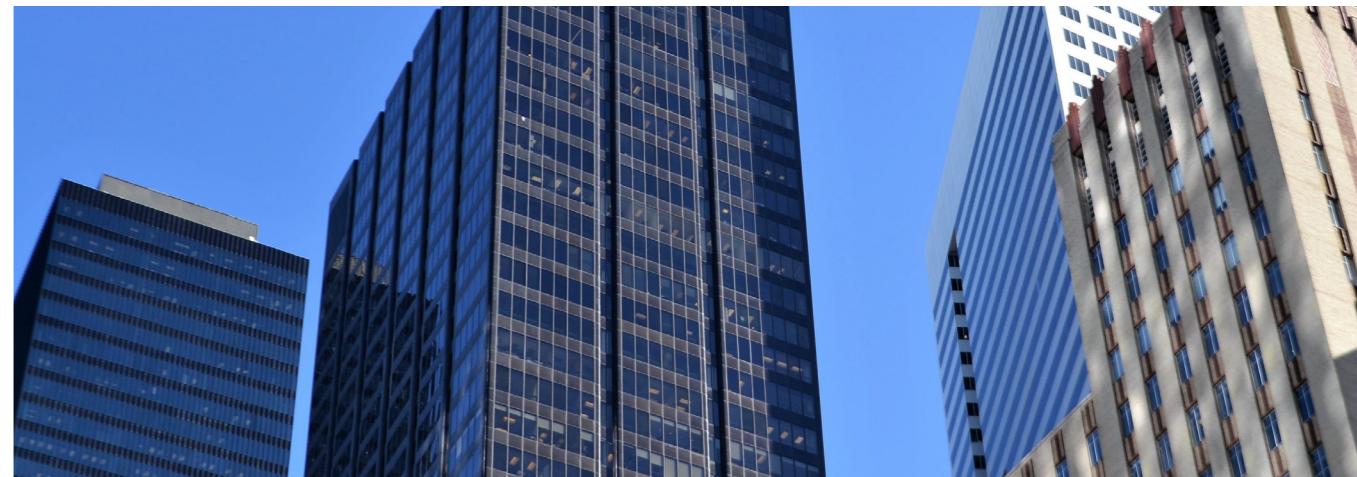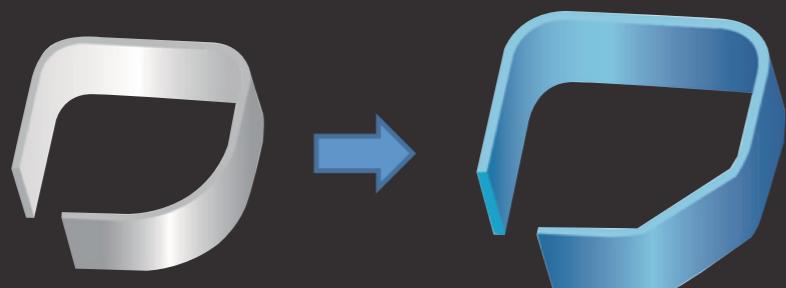

### Comfortable

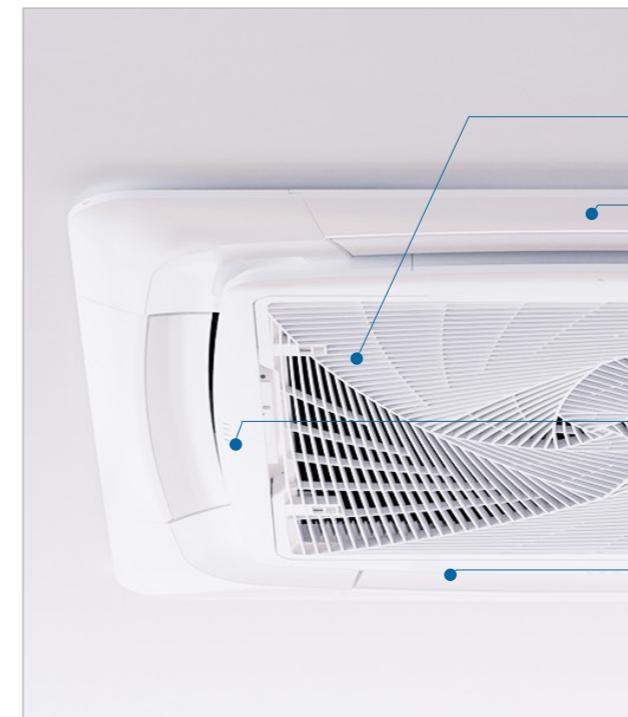

#### Stylish design

- "Spiral" panel**  
"Spiral" concept, "Haier" image.
- Abs material panel**  
ABS material makes the panel "piano white", different from "dark white" PS material color. the panel and flap are the same material. After 10 years, the panel color won't change to yellow color because the ABS material prevents discoloration against light raying.
- Hidden lcd display**  
The 360° smart flow cassette have particular hidden LCD display design. green display for cooling red display for heating, it is very easy identified by opening mode.
- Flap is closed when air conditioner off**  
There is no crack from the flap and the panel when the air conditioner off. more elegance.

### Low sound level



#### Super big inlet grille

Compared to conventional air inlet grill, we enlarge the air inlet area by 23%, lower air speed & lower the sound level.



#### New designed fan

The diameter of new fan is enlarged based on acrodynamic theory, so that there is the least resistance against airflow. reduce 3dB(A) for sound level.

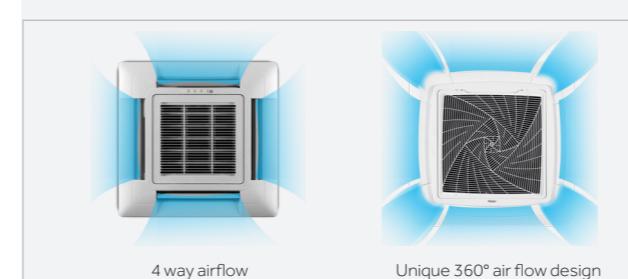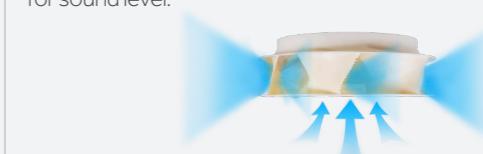

#### Round way air supply

Round way air supply without blind spot.


# Comfortable

## Individual flap control

The four flaps can be controlled individually according to end users by controller, providing maximum comfort throughout the room, it is a good solution to avoid "air conditioning disease".



AHRI CERTIFIED®  
www.ahrdirectory.org

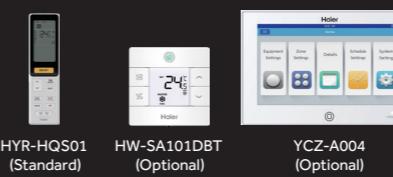

# High Reliability

## Easy design


### Ultra thin design

Haier cassette height is 183mm (3.6/3.8/4.0kW), lower 220mm normal product at least, give the designer extreme flexibility in design work.



### Three way valve choice

According to customer need Haier can supply the three way valve to match with cassette and duct fan coil, give the flexibility in design work.

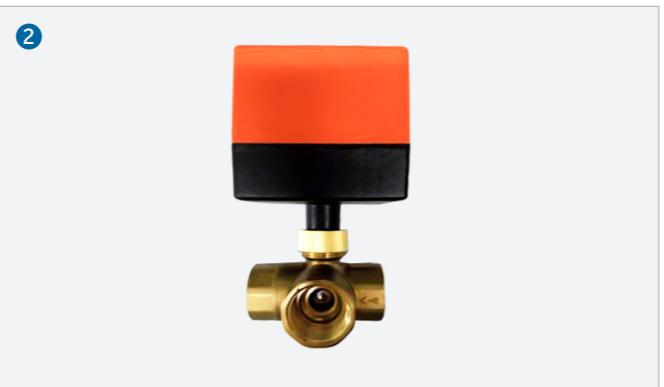


# Convenient

## Flexible design




- 1 One screw for wiring**  
Installer can finish wiring by take down one screw.

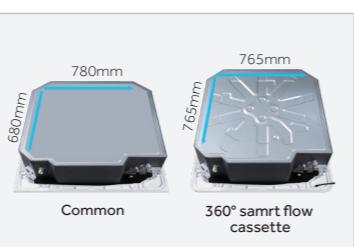

- 2 Square hanger**  
Innovative square hanger, flexible direction adjustment , avoid second try installation.



- 3 Convenient clip**  
There is a clip to lock the panel, just one installer can finish the screwing for panel. save manpower and easy installation.

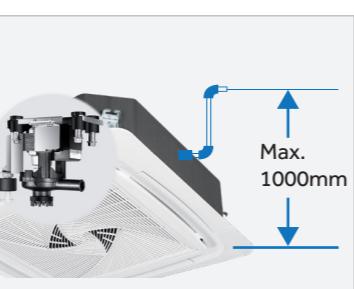

- 4 High lift-up drain pump**  
It can lifts condensed water up to 1000mm, which is more flexible to install the duct according to the layout.

MODEL		FCB-040BCN2B	FCB-058BCN2B	FCB-068BCN2B	FCB-085BCN2B	FCB-102BCN2B
Air volume m³/h	H	400	580	680	850	1020
	M	305	465	525	700	840
	L	230	350	420	520	620
Cooling capacity W	H	3600	3800	4000	4980	5810
	M	3132	3306	3500	4356	4943
	L	2664	2812	2970	3696	4230
Heating capacity W	H	6000	6200	6500	8100	9450
	M	5280	5456	5780	7208	8315
	L	4560	4712	4940	6155	7182
Power input W	H	52	55	62	71	80
Power supply Ph/V/Hz		1/220-240/50				
Noise level dB(A)	H	33	34	34	36	41
	M	26	28	28	32	35
	L	22	24	24	28	31
Water flow l/min		10.3	10.9	11.5	14.4	16.7
Water pressure drop kPa		20	21	22	28	38
Net weight kg		24.2	24.2	24.2	26	26
Gross weight kg		30.8	30.8	30.8	32.5	32.5
Water inlet/outlet connection pipe		Rc3/4"				
Condensate water connection pipe		DN20				
External dimension(L/W/H) mm		840/840/183				840/840/204
Packing dimension(L/W/H) mm		983/983/268				983/983/290
Panel		PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB
Panel external dimensions(W/D/H) mm		950/950/50	950/950/50	950/950/50	950/950/50	950/950/50
Panel shipping dimensions(W/D/H) mm		1000/1000/110	1000/1000/110	1000/1000/110	1000/1000/110	1000/1000/110
Panel net/shipping weight kg		6.5/9	6.5/9	6.5/9	6.5/9	6.5/9
Controller	wireless(standard)	YR-HQS01	YR-HQS01	YR-HQS01	YR-HQS01	YR-HQS01
	wired(optional)	HW-SA101DBT	HW-SA101DBT	HW-SA101DBT	HW-SA101DBT	HW-SA101DBT
Three way valve (optional)		3VFCB				

Option: 1.Three way valve;

Note: 1. Specifications are based on the following conditions:

Cooling: Dry bulb temperature 27°C, wet bulb temperature 19.5°C, the water inlet temperature 7°C, 5°C temperature difference between water inlet and water outlet.

Heating: Dry bulb temperature 21°C, the water inlet temperature 60°C, the water flow is the same to that at the cooling test condition.

2. Due to the our policy of innovation, some specifications may be changed without notification.

HYR-HQS01  
(Standard)HW-SA101DBT  
(Optional)YCZ-A004  
(Optional)

MODEL		FCB-136BCN2B	FCB-170BCN2B	FCB-204BCN2B	FCB-238BCN2B	
Air volume	m³/h	H	1360	1700	2040	
		M	1120	1400	1650	
		L	840	1000	1250	
Cooling capacity	W	H	7600	9200	11200	
		M	6579	8215	9663	
		L	5585	7132	8500	
Heating capacity	W	H	12200	14800	17130	
		M	11223	12727	14903	
		L	9638	10952	12847	
Power input	W	H	115	152	180	
Power supply	Ph/V/Hz		1/220-240/50			
Noise level	dB(A)	H	44	48	50	52
		M	40	40	42	48
		L	34	33	34	43
Water flow	l/min		21.8	26.4	32.1	36.2
Water pressure drop	kPa		33	40	40	50
Net weight	kg		30.5	30.5	33.2	33.2
Gross weight	kg		37.5	37.5	39.7	39.7
Water inlet/outlet connection pipe			Rc3/4"			
Condensate water connection pipe			DN20			
External dimension(L/W/H)	mm		840/840/246		840/840/288	
Packing dimension(L/W/H)	mm		983/983/329		983/983/378	
Panel		PB-950KB	PB-950KB	PB-950KB	PB-950KB	
Panel external dimensions(W/D/H)	mm	950/950/50	950/950/50	950/950/50	950/950/50	
Panel shipping dimensions(W/D/H)	mm	1000/1000/110	1000/1000/110	1000/1000/110	1000/1000/110	
Panel net/shipping weight	kg	6.5/9	6.5/9	6.5/9	6.5/9	
Controller	wireless(standard)	YR-HQS01	YR-HQS01	YR-HQS01	YR-HQS01	
	wired(optional)	HW-SA101DBT	HW-SA101DBT	HW-SA101DBT	HW-SA101DBT	
Three way valve (optional)		3VFCB				

Option: 1.Three way valve:

Note:1. Specifications are based on the following conditions:

Cooling: Dry bulb temperature 27°C, wet bulb temperature 19.5°C, the water inlet temperature 7°C, 5°C temperature difference between water inlet and water outlet.


Heating: Dry bulb temperature 21°C, the water inlet temperature 60°C, the water flow is the same to that at the cooling test condition.

2. Due to the our policy of innovation, some specifications may be changed without notification.


# Dimensions

Chilled Water Cassette Dimension

## Position of ceiling opening and unit and hoisting screws

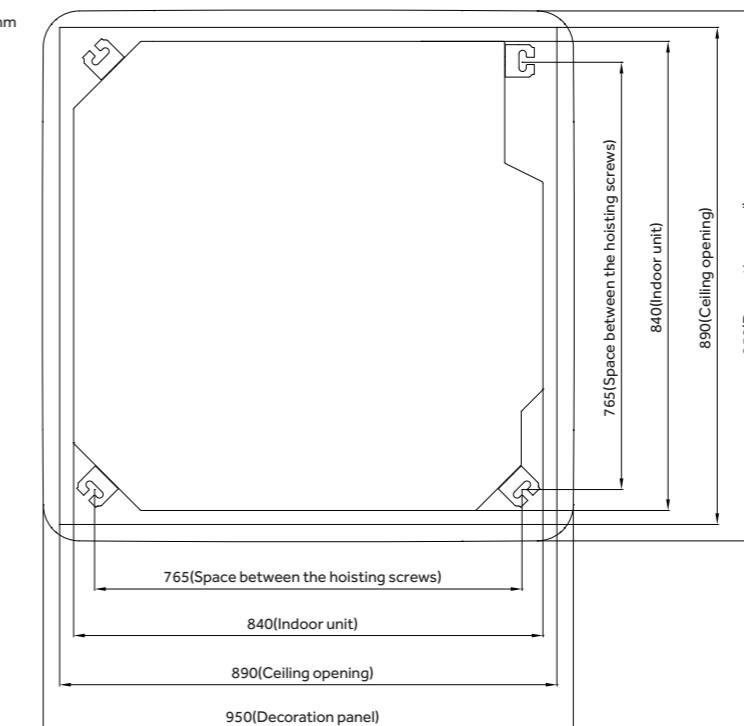

Model	H
FCB-040BCN2B	215
FCB-058BCN2B	
FCB-068BCN2B	
FCB-085BCN2B	257
FCB-102BCN2B	
FCB-136BCN2B	299
FCB-170BCN2B	
FCB-204BCN2B	
FCB-238BCN2B	341

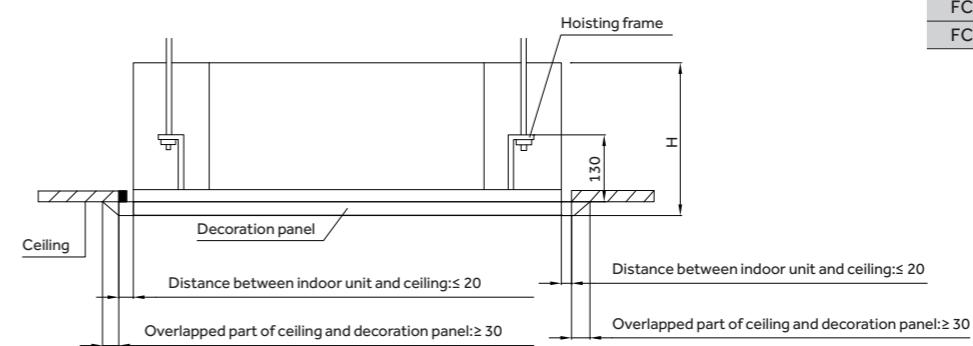

## Notes:


The overlapped part of ceiling and decoration panel shall be more than 30mm. The distance between indoor unit and ceiling shall be within 20mm. In case the distance between indoor unit and ceiling is more than 20mm, please additionally install the ceiling materials or repair the ceiling.

# Air Handling Unit




## Nomenclature

Haier air handling units are designed for central handling of air, including the essential function of ventilation, cooling, heating, heat recovery, humidification, dehumidification and cleaning, etc. the unit is widely used in industrial air conditioning systems in electronic, instrument, machinery, metallurgy, chemical, textile, medicine, food, tobacco, and transport, energy and the like. It's also widely used in comfortable air conditioning systems in high-rise buildings, hotels, restaurants, cinemas and theatres, shopping malls, stadiums and other large public buildings.

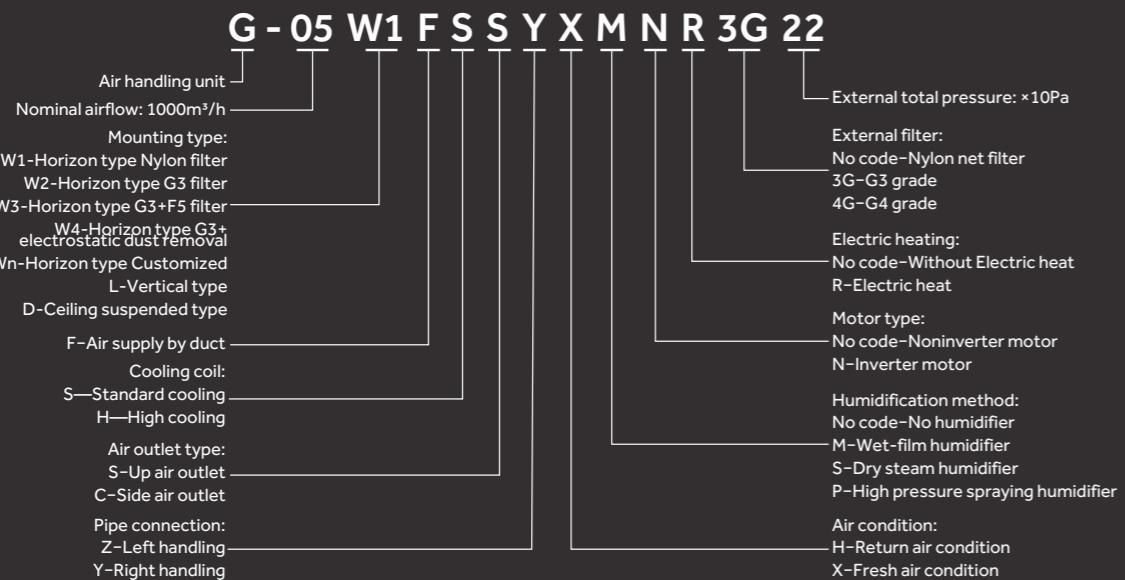

## Orientation

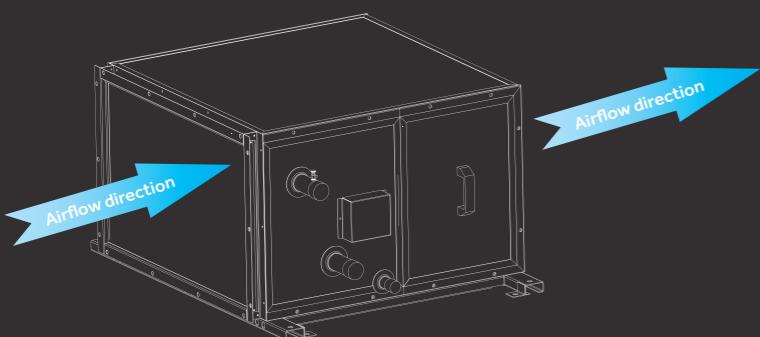

Judgment basis: facing the return air inlet (along the airflow direction), if water inlet and outlet pipe and condensate pipe are in left, then it is left connected type unit, on the contrary, it is right connected type unit. the picture on the left is the right connected type unit.



## High Efficiency




### Low sound level

The unit adopts high quality and efficient motor, to make the unit operation more peaceful.

Each fan needs to pass the strict accurate dynamic and static balance test and safety test, to ensure safety and reliability.

The fan has wide optional wind pressures, which can meet the need for more occasions.

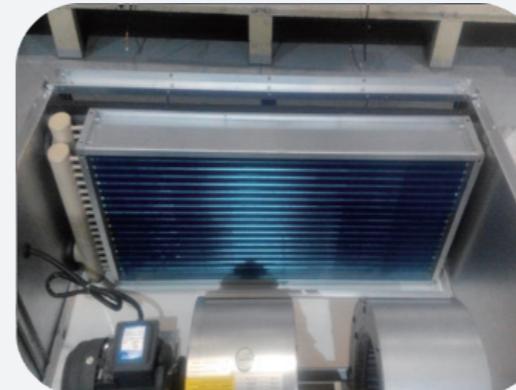


### Heat exchanger

Heat exchanger is made of high quality seamless copper tube and corrugated type hydrophilic aluminum foil, with the advanced mechanical or hydraulic tube expanding technology to make them closely integrated, and each heat exchanger passes the pressure seal leakage test, to guarantee the product excellent performance and reliable quality.

The heat exchanger with corrugated sheet has greater heat transfer area than that with ordinary plain film, while the hydrophilic aluminum foil has better resistance to oxidation than ordinary plain foil, with more outstanding heat transfer effect, which effectively guarantee the heat transfer effect and service life of heat exchanger.


Reasonable copper tube arrangement, scientific segment pitch and waterway route, so as to ensure the coil with high heat transfer performance and low air resistance, which can meet the needs of a wide range of cooling and heating. a number of different pipeline cycle designing schemes is enough to provide users with the best water flow rate and reasonable water resistance.

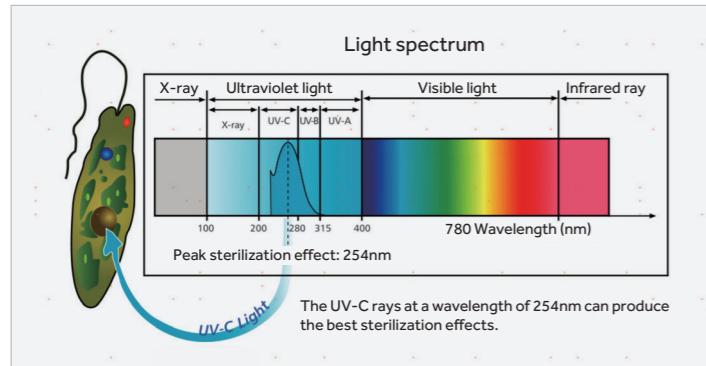

## UV sterilizer section


Ultraviolet sterilization: the ultraviolet rays can be divided into four bands by wavelength according to the different biological effects. UV-C, the C band of UV rays, is from 275-200nm.

The UV rays at a wavelength of about 254nm have the strongest bactericidal ability. photonic energy can destroy the molecular structure of microbe DNA and RNA, making them subjected breakage or photochemical reaction to lose the ability to reproduce.

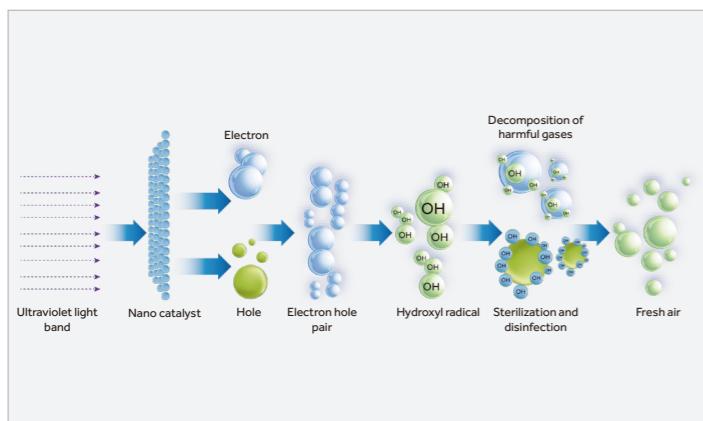

## Photocatalyst purification and sterilization section


Under the radiation of certain light at a specific wavelength, the nanometer photocatalyst can be activated to produce electron hole pairs which can have the photocatalyst interact with surrounding H<sub>2</sub>O molecules and O<sub>2</sub> molecules to form hydroxyl radicals (OH). the hydroxyl radicals can lock up all harmful components in the air layer by layer and break down their molecular structures to inhibit the growth of the bacteria and the virus activity, thus achieving the purposes of sterilization, air purification, deodorization, anti-poison, and air pollution abatement, etc.

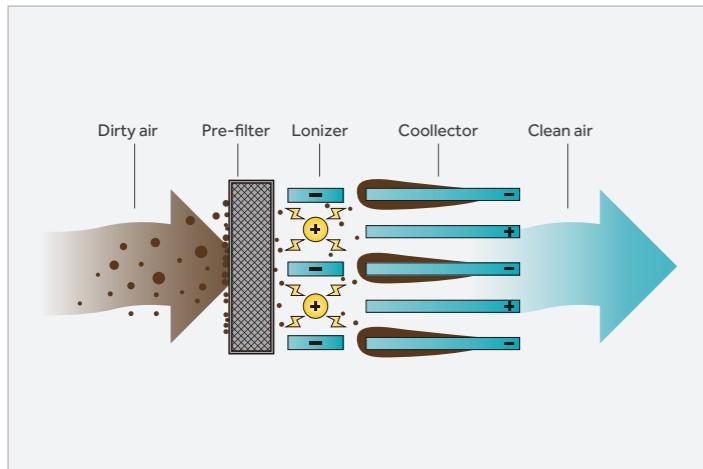

## Electronic air cleaner section

Floating dust and pollutants in the air are ionized and change the direction of movement as they pass through a high-voltage electric field, and then are captured. then, the positively charged ions move towards the cathode plate (negative plate) under the action of the electric field force. based on the principle of positive and negative attraction, the particles will be captured and adsorbed on the integrated plate by the energies released by the high-voltage charges instantly, thus achieving the purposes of dust removal and sterilization.

PM2.5 one-pass purification efficiency: >90% at 2.5m/s air speed (in coordination with primary efficiency filter)  
microorganism one-pass purification efficiency: >90%

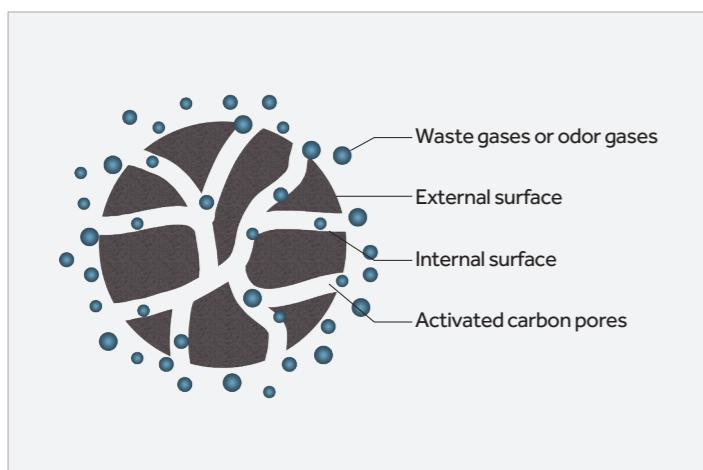


## Activated carbon absorber section

The function section is fitted with an activated carbon filter that consists of tiny carbon grain with large surface area and even smaller pores called capillaries. such capillaries have very strong adsorption capacity and relying on the large surface area of the carbon particles, they can come into full contact with impurities in the gases. the impurities in the gases will be absorbed after meeting with the capillaries, so air purification can be achieved.

Activated carbon	N4G1	N4S1	N4A1	N4F1	N4M1
Usage	General gases	Odors	Acid gases	Formaldehyde	Mercury vapor

## High Reliability


### Patented box structure, with more excellent performance

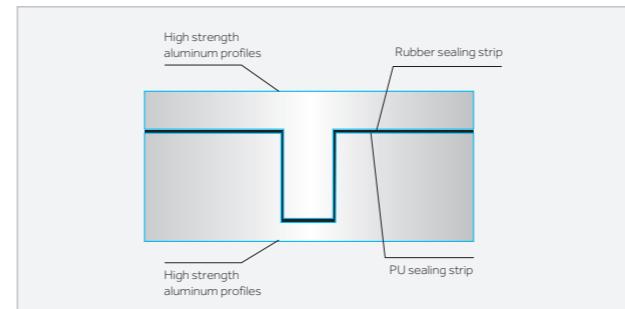


#### Higher strength, lower air leak

Use the patent of no-frame design, high strength aluminum profiles with concave-convex chamfer embedded type to connect and seal, and be fixed in a way matching the bolting.

Adopt rubber sealing strip, PU sealing strip and tenons of the structure itself contains to triple seal through interlocking connection, fundamentally solving the problem of air leakage, to ensure the strength of box body, and the air leakage rate is no more than 0.13%.

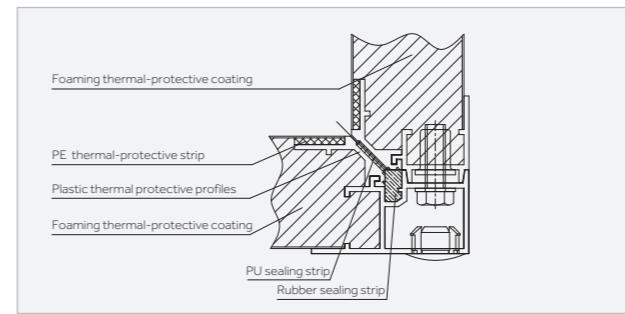

### Environmental protection materials make it safe and secure

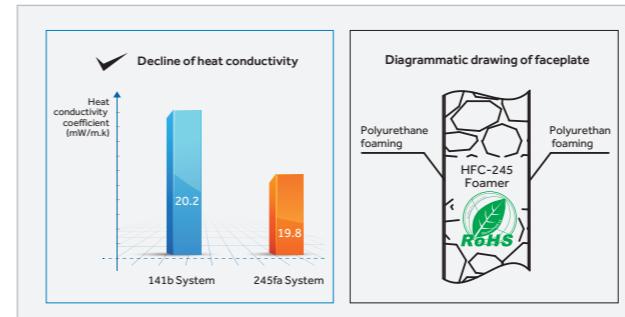

The unit materials are all conformed to the requirements of the EU roHS environmental protection certification.

Panel is made of high-pressure polyurethane foam material, and the foamer uses special environmental protection foamer of HFC-245fa, safe and harmless, clean and environmental protection, with good heat preservation and sound insulation.

The thermal conductivity of box is no more than 0.0198 W/m°C and better than that of conventional 141 b system foamer by more than 2%, which effectively ensure the cold heat supply capacity of the unit, and reduce the operation cost.

## Convenient

### Entire condensate plate

Well-designed entire condensate plate and extremely thick lining heat insulation materials ensure the unit to have no condensation dripping water under severe environment conditions.


In-time draining of condensate reduce the time of condensate plate "touching water", which can not only reduce the condensate plate corrosion, but also avoid the condensate plate breeding bacteria, so as to ensure the indoor air quality.




### Filter

Mouldproof plate type thick nylon filter with standard configuration, has features of small initial resistance, high efficiency, stable performance, easy and simple usage and repeatable cleaning usage etc.

It can provide a higher level of filter efficiency, initial and medium filtration for customer choice, the initial filtration efficiency can reach G3/G4; medium filtration efficiency can reach F5/F6/F7 level, which can effectively remove dust PM2.5 particles.

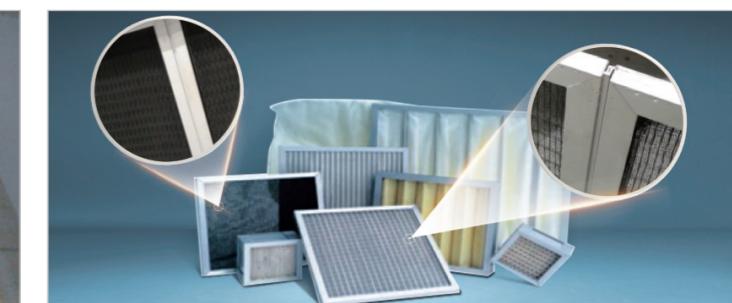

# Dimensions

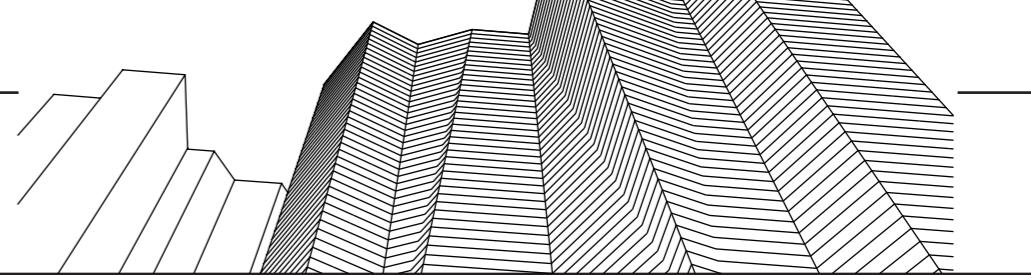

## Ceiling mounted air handling unit

### Standard cooling

Model	Nominal airflow (m³/h)	Nominal cooling capacity (kW)		Nominal heating capacity (kW)		Water flow rate (L/s)		Water pressure drop (kPa)		Noise dB(A)	Pipe diameter		Weight (kg)
		Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition		Water inlet/out pipe(DN)	Condensate water pipe(DN)	
G-02DFS	2000	11.8	25.0	18.9	27.6	0.56	1.20	43.95	51.56	58	40	25	90
G-03DFS	3000	17.6	38.0	27.0	41.2	0.85	1.82	64.08	51.27	58	40	25	100
G-04DFS	4000	25.0	53.0	38.5	56.1	1.19	2.53	79.26	58.91	60	40	25	129
G-05DFS	5000	29.5	67.5	47.0	70.5	1.41	3.23	72.91	98.00	62	50	25	155
G-06DFS	6000	35.9	75.0	56.9	82.1	1.72	3.58	83.12	98.64	62	50	25	159
G-08DFS	8000	47.7	99.5	75.4	108.6	2.28	4.75	60.82	53.95	64	50	25	189
G-10DFS	10000	61.1	127.0	95.0	136.7	2.92	6.07	95.00	48.56	66	50	25	224
G-12DFS	12000	73.9	153.6	114.7	164.9	3.53	7.34	80.24	67.63	68	50	25	270
G-15DFS	15000	93.1	193.3	143.9	206.6	4.45	9.24	82.95	94.00	70	65	25	310

### High cooling

Model	Nominal airflow (m³/h)	Nominal cooling capacity (kW)		Nominal heating capacity (kW)		Water flow rate (L/s)		Water pressure drop (kPa)		Noise dB(A)	Pipe diameter		Weight (kg)
		Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition		Water inlet/out pipe(DN)	Condensate water pipe(DN)	
G-02DFH	2000	14.3	31.6	21.9	32.7	0.69	1.51	20.78	26.45	58	40	25	93
G-03DFH	3000	21.8	47.5	32.9	48.8	1.04	2.27	60.93	75.00	58	40	25	116
G-04DFH	4000	29.7	65.5	44.7	65.8	1.42	3.13	70.93	90.57	60	40	25	138
G-05DFH	5000	37.9	80.7	56.3	81.8	1.81	3.86	39.48	53.00	62	50	25	165
G-06DFH	6000	46.0	97.6	67.9	98.5	2.20	4.66	31.46	46.00	62	50	25	174
G-08DFH	8000	61.2	129.6	90.1	130.7	2.92	6.19	48.42	68.00	64	50	25	195
G-10DFH	10000	74.4	157.5	111.4	161.7	3.55	7.53	90.00	80.75	66	50	25	230
G-12DFH	12000	89.9	190.0	134.2	194.6	4.30	9.08	38.50	87.72	68	50	25	282
G-15DFH	15000	113.2	238.7	168.1	243.6	5.41	11.40	62.02	99.00	70	65	25	317

### Note:

- 1.Standard return air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 27°CDB / 19.5°CWB.
- 2.Standard return air heating conditions: hot water inlet at 60°C; air inlet at 21°CDB. The water flow volume is the same to that of chilled water.
- 3.Standard fresh air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 35°CDB / 28°CWB.
- 4.Standard fresh air heating conditions: hot water inlet at 60°C; air inlet at 7°CDB. The water flow volume is the same to that of chilled water.
- 5.Power supply: 3Ph/380V/50Hz


## Customizable external total pressure

### Ceiling suspended type

Model	Airflow	Motor power (kW) corresponding to external total pressure (Pa)							
		120Pa	170Pa	220Pa	270Pa	320Pa	370Pa	420Pa	470Pa
G-02DFS	2000	0.37	0.7	0.7	0.7	0.7	0.75	/	/
		0.7	0.7	0.7	0.7	0.75	/	/	/
G-03DFS	3000	0.7	0.7	0.7	0.75	0.75	/	/	/
		0.7	0.7	0.75	0.75	/	/	/	/
G-04DFS	4000	0.75	0.75	0.75	1.1	1.1	1.1	/	/
		0.75	0.75	1.1	1.1	1.1	1.1	/	/
G-05DFS	5000	1.1	1.1	1.1	1.5	1.5	/	/	/
		1.1	1.1	1.5	1.5	1.5	1.5	/	/
G-06DFS	6000	1.1	1.1	1.5	1.5	1.5	2.2	2.2	3
		1.1	1.5	1.5	1.5	2.2	2.2	3	3
G-08DFS	8000	/	/	1.5	2.2	2.2	2.2	2.2	3
		/	/	2.2	2.2	2.2	2.2	3	3
G-10DFS	10000	/	/	2.2	2.2	3	3	3	3
		/	/	2.2	3	3	3	3	4
G-12DFS	12000	/	/	3	4	4	4	4	4
		/	/	3	4	4	4	4	5.5
G-15DFS	15000	/	/	4	4	4	4	5.5	5.5
		/	/	4	4	4	4	5.5	5.5


◆ The values in the table are motor power input under different external total pressure, the bold type values are the motor power input at the nominal pressure.

## Air handling unit dimension

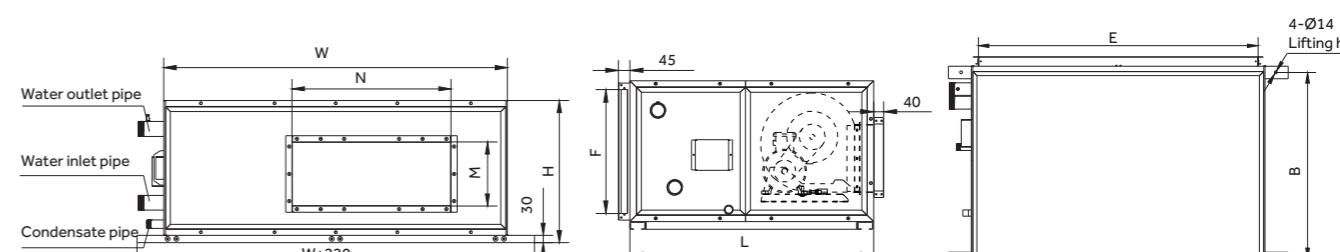

Model	Dimension(mm)								Water inlet/outlet pipe(DN)	Condensate water pipe (DN)
	L	W	H	A	B	E	F	M		
G-02DF	750	750	530	850	692	687	434	224	302	40
G-03DF	750	1000	530	1100	692	937	434	224	302	40
G-04DF	900	1050	630	1150	842	987	534	293	335	40
G-05DF	900</									

# Specification

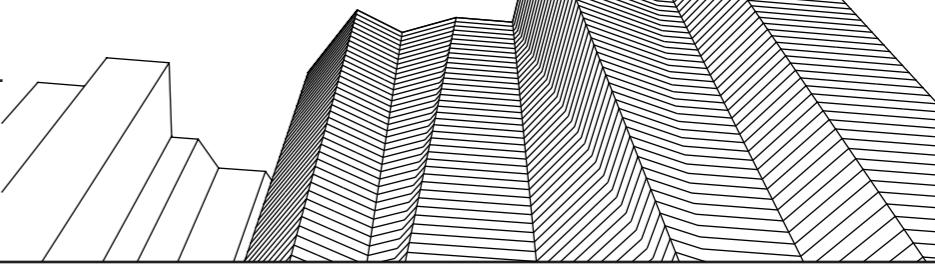

Horizontal type

Standard cooling

Model	Nominal airflow (m³/h)	Nominal cooling capacity(kW)		Nominal heating capacity(kW)		Water flow rate (L/s)		Water pressure drop(kPa)		Noise dB(A)	Pipe diameter		Weight (kg)			
		Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition		Water inlet/out pipe(DN)	Condensate water pipe(DN)	Horizontal type 1	Horizontal type 2	Horizontal type 3	Horizontal type 4
G-02W*FS	2000	11.8	25	18.9	27.6	0.57	1.2	13.1	8.7	58	40	25	127	156	174	188
G-03W*FS	3000	17.9	38.1	28.3	41.2	0.85	1.82	26.6	17.4	58	40	25	146	175	195	215
G-04W*FS	4000	24.5	52.2	38.2	55.7	1.17	2.49	45.1	29	60	40	25	165	199	222	254
G-05W*FS	5000	28.2	65.7	46	69.6	1.35	3.14	9.2	39.5	62	50	25	188	228	247	279
G-06W*FS	6000	33.9	78.8	54.5	83.5	1.62	3.77	9	38.6	62	50	25	211	258	279	312
G-08W*FS	8000	46.1	106.8	74.5	112.2	2.2	5.1	13.2	56.9	64	50	25	253	316	342	387
G-10W*FS	10000	58.3	134.2	93.5	140.3	2.79	6.41	16.8	72.2	66	50	25	313	388	429	493
G-12W*FS	12000	71.2	148.8	113.3	163.3	3.4	7.11	20.8	21.1	68	50	25	338	422	466	531
G-15W*FS	15000	91.3	189.9	142.9	205.5	4.36	9.07	34.3	34.9	70	65	25	419	563	616	712
G-18W*FS	18000	111.4	231.1	172.4	247.6	5.32	11.04	57.7	58.4	70	65	32	484	646	771	817
G-20W*FS	20000	125.9	260.7	198.2	284.8	6.01	12.45	39.2	39.8	72	65	32	542	700	801	917
G-25W*FS	25000	159.9	330.1	249.6	358.2	7.64	15.77	55.6	54.9	72	80	32	612	772	876	1007
G-30W*FS	30000	191.9	396.1	299.7	429.8	9.17	18.93	54.9	54.9	75	80	32	706	949	1023	1177
G-35W*FS	35000	223.9	469.2	349.7	506.1	10.7	22.42	54.3	27.8	75	80*2	32	917	1158	1234	1414
G-40W*FS	40000	231	541.7	376.4	579.8	11.04	25.88	18.5	40.7	78	80*2	32	953	1190	1293	1498
G-45W*FS	45000	259.1	608.1	422.7	651.6	12.38	29.05	17.6	38.7	78	80*2	32	1020	1272	1407	1637
G-50W*FS	50000	289.3	678.8	471.7	726.9	13.82	32.43	17.3	38.2	78	80*2	32	1090	1311	1448	1714

Horizontal type

High cooling

Model	Nominal airflow (m³/h)	Nominal cooling capacity(kW)		Nominal heating capacity(kW)		Water flow rate (L/s)		Water pressure drop(kPa)		Noise dB(A)	Pipe diameter		Weight (kg)			
		Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition		Water inlet/out pipe(DN)	Condensate water pipe(DN)	Horizontal type 1	Horizontal type 2	Horizontal type 3	Horizontal type 4
G-02W*FH	2000	14	31.7	21.9	32.7	0.67	1.51	4.1	16.3	58	40	25	133	162	179	193
G-03W*FH	3000	21.4	47.9	32	48.8	1.02	2.29	18.2	33.2	58	40	25	153	182	199	219
G-04W*FH	4000	29.4	64.9	44.4	65.5	1.41	3.1	13.9	55.3	60	40	25	173	206	230	262
G-05W*FH	5000	36.9	81.4	55.2	81.9	1.76	3.89	19.2	76.1	62	50	25	198	238	256	289
G-06W*FH	6000	44.3	97.8	66.8	98.3	2.12	4.67	19.2	76.1	62	50	25	224	271	292	325
G-08W*FH	8000	60	127.8	89.6	130.3	2.87	6.11	28.5	35	64	50	25	270	332	358	404
G-10W*FH	10000	75.6	160.5	112.2	163	3.61	7.67	36.6	44.9	66	50	25	329	404	446	510
G-12W*FH	12000	91.8	194.3	135.4	196.4	4.38	9.28	45.2	55.1	68	50	25	365	448	489	554
G-15W*FH	15000	118.3	245.5	170.1	246.3	5.65	11.73	69.4	89.5	70	65	25	448	591	639	735
G-18W*FH	18000	141.2	285.6	204.5	292.1	6.75	13.65	82.9	57.2	70	65	32	525	686	804	849
G-20W*FH	20000	152.4	320.8	228.7	331.8	7.28	15.33	25.4	37.4	72	65	32	584	743	834	950
G-25W*FH	25000	193.1	405.2	287.6	416.4	9.22	19.36	35	53.1	72	80	32	660	821	913	1042
G-30W*FH	30000	231.7	486.2	345.2	499.7	11.07	23.23	35	53.1	75	80	32	765	1007	1081	1236
G-35W*FH	35000	270.3	567.2	402.7	582.9	12.91	27.1	35	53.1	75	80*2	32	986	1227	1303	1484
G-40W*FH	40000	311.8	652.3	461.3	667.1	14.9	31.17	51.1	77.3	78	80*2	32	1067	1302	1386	1592
G-45W*FH	45000	350.1	732.9	518.6	750	16.73	35.01	48.7	73.7	78	80*2	32	1137	1389	1524	1755
G-50W*FH	50000	390.5	817	603.4	835.4	18.66	39.03	48	72.5	78	80*2	32	1226	1445	1581	1849

Note:

1.Standard return air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 27°CDB / 19.5°CWB.

2.Standard return air heating conditions: hot water inlet at 60°C; air inlet at 21°CDB. The water flow volume is the same to that of chilled water.

3.Standard fresh air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 35°CDB / 28°CWB.

4.Standard fresh air heating conditions: hot water inlet at 60°C; air inlet at 7°CDB. The water flow volume is the same to that of chilled water.

5.Power supply: 3PH/380V/50Hz

Note:


1.Standard return air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 27°CDB / 19.5°CWB.

2.Standard return air heating conditions: hot water inlet at 60°C; air inlet at 21°CDB. The water flow volume is the same to that of chilled water.

3.Standard fresh air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 35°CDB / 28°CWB.

</div

# Specification

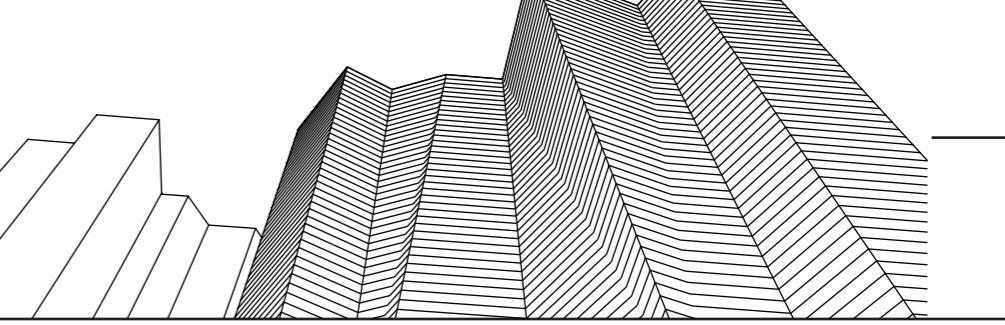

Customizable external total pressure

Horizontal type 1

Model	Airflow	Motor power (kW) corresponding to external total pressure (Pa)									
		m³/h	120Pa	170Pa	220Pa	270Pa	320Pa	370Pa	420Pa	470Pa	520Pa
G-02W1FS	2000	0.37	0.37	0.55	0.55	0.55	0.55	0.55			
G-02W1FH		0.37	0.55	0.55	0.55	0.55	0.55	0.75			
G-03W1FS	3000	0.55	0.55	0.75	0.75	0.75	1.1				
G-03W1FH		0.55	0.75	0.75	0.75	1.1	1.1				
G-04W1FS	4000	0.75	0.75	0.75	1.1	1.1	1.1				
G-04W1FH		0.75	0.75	1.1	1.1	1.1	1.1				
G-05W1FS	5000	1.1	1.1	1.1	1.5	1.5	1.5				
G-05W1FH		1.1	1.1	1.1	1.5	1.5	1.5				
G-06W1FS	6000	1.1	1.1	1.5	1.5	1.5	2.2				
G-06W1FH		1.1	1.5	1.5	1.5	2.2	2.2				
G-08W1FS	8000		1.5	2.2	2.2	2.2	2.2	3			
G-08W1FH			2.2	2.2	2.2	2.2	3	3			
G-10W1FS	10000		2.2	2.2	3	3	3	3			
G-10W1FH			2.2	3	3	3	3	4			
G-12W1FS	12000		3	3	3	3	4	4			
G-12W1FH			3	3	3	4	4	4			
G-15W1FS	15000		4	4	4	4	5.5	5.5			
G-15W1FH			4	4	4	5.5	5.5	5.5			
G-18W1FS	18000		4	5.5	5.5	5.5	5.5	5.5			
G-18W1FH			5.5	5.5	5.5	5.5	5.5	7.5			
G-20W1FS	20000		5.5	5.5	5.5	7.5	7.5				
G-20W1FH			5.5	5.5	7.5	7.5	7.5				
G-25W1FS	25000		7.5	7.5	7.5	11	11	11			
G-25W1FH			7.5	7.5	11	11	11	11			
G-30W1FS	30000			11	11	11	15	15	15	15	
G-30W1FH				11	11	15	15	15	15	15	
G-35W1FS	35000			11	11	15	15	15	15	15	
G-35W1FH				11	15	15	15	15	15	15	
G-40W1FS	40000			15	15	15	15	15	15	18.5	
G-40W1FH				15	15	15	15	15	18.5	18.5	
G-45W1FS	45000			15	15	18.5	18.5	18.5	18.5	18.5	
G-45W1FH				15	18.5	18.5	18.5	18.5	18.5	22	
G-50W1FS	50000				18.5	18.5	18.5	22	22	22	30
G-50W1FH					18.5	18.5	22	22	22	22	30

◆ The values in the table are motor power input under different external total pressure, the bold type values are the motor power input at the nominal pressure.

Horizontal type 2

Model	Airflow	Motor power (kW) corresponding to external total pressure (Pa)									
		m³/h	120Pa	170Pa	220Pa	270Pa	320Pa	370Pa	420Pa	470Pa	520Pa
G-02W2FS	2000	0.55	0.55	0.55	0.55	0.75	0.75	0.75			
G-02W2FH		0.55	0.55	0.55	0.75	0.75	0.75				
G-03W2FS	3000	0.75	0.75	0.75	1.1	1.1	1.1				
G-03W2FH		0.75	0.75	1.1	1.1	1.1					
G-04W2FS	4000	0.75	1.1	1.1	1.1	1.5					
G-04W2FH		1.1	1.1	1.1	1.5	1.5					
G-05W2FS	5000	1.1	1.1	1.5	1.5	1.5					
G-05W2FH		1.1	1.5	1.5	1.5	2.2					
G-06W2FS	6000	1.5	1.5	1.5	2.2	2.2					
G-06W2FH		1.5	1.5	2.2	2.2	2.2					
G-08W2FS	8000		2.2	2.2	2.2	3	3	3			
G-08W2FH			2.2	2.2	3	3	3	3			
G-10W2FS	10000		3	3	3	3	4	4			
G-10W2FH			3	3	3	4	4	4			
G-12W2FS	12000		3	3	4	4	4	5.5			
G-12W2FH			3	3	4	4	4	5.5			
G-15W2FS	15000		4	4	5.5	5.5	5.5	5.5			
G-15W2FH			4	5.5	5.5	5.5	5.5	5.5			
G-18W2FS	18000		5.5	5.5	5.5	5.5	7.5	7.5			
G-18W2FH			5.5	5.5	5.5	7.5	7.5	7.5			
G-20W2FS	20000		5.5	7.5	7.5	7.5	7.5	7.5			
G-20W2FH			7.5	7.5	7.5	7.5	7.5	11			
G-25W2FS	25000		7.5	11	11	11	11	11			
G-25W2FH			11	11	11	11	11	11			
G-30W2FS	30000			11	15	15	15	15	15	15	
G-30W2FH				15	15	15	15	15	15	15	
G-35W2FS	35000			15	15	15	15	15	15	15	
G-40W2FS	40000			15	15	15	18.5	18.5	18.5	18.5	
G-40W2FH				15	15	15	18.5	18.5	18.5	18.5	
G-45W2FS	45000			18.5	18.5	18.5	18.5	18.5	22	22	
G-45W2FH				18.5	18.5	18.5	18.5	18.5	22	22	
G-50W2FS	50000			18.5	22	22	22	22	22	22	
G-50W2FH				22	22	22	22	22	22	22	



◆ The values in the table are motor power input under different external total pressure, the bold type values are the motor power input at the nominal pressure.

Customizable external total pressure

Horizontal type 3

Model	Airflow	Motor power (kW) corresponding to external total pressure (Pa)		
-------	---------	--	--	--


# Dimensions

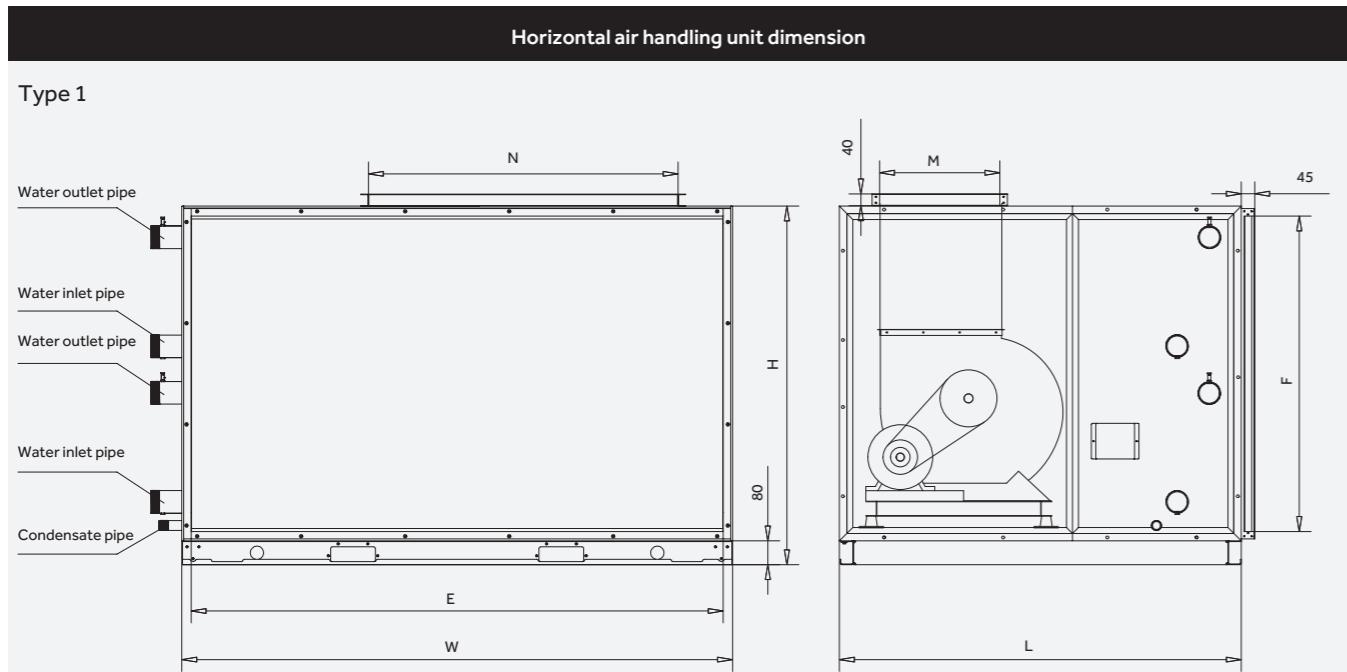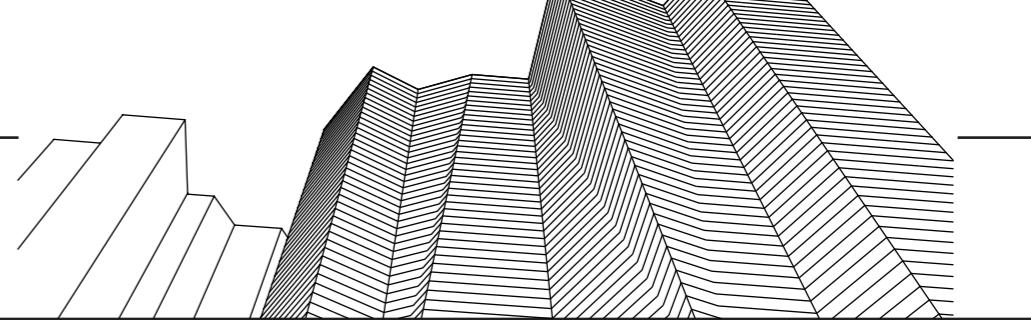

Model	Dimension(mm)							Water inlet/outlet pipe (DN)	Condensate water pipe (DN)
	L	W	H	E	F	M	N		
G-02W1F	1100	850	680	785	535	262	232	40	25
G-03W1F	1100	1000	680	935	535	262	295	40	25
G-04W1F	1150	1150	730	1085	585	289	331	40	25
G-05W1F	1200	1200	830	1135	685	341	395	50	25
G-06W1F	1200	1250	880	1185	735	341	395	50	25
G-08W1F	1250	1400	980	1335	835	404	471	50	25
G-10W1F	1400	1500	1080	1435	935	478	430	50	25
G-12W1F	1400	1600	1180	1535	1035	478	557	50	25
G-15W1F	1350	1850	1230	1785	1085	404	1040	65	25
G-18W1F	1350	2250	1230	2185	1085	404	1326	65	32
G-20W1F	1500	2500	1180	2435	1035	478	1203	65	32
G-25W1F	1500	2800	1280	2735	1135	478	1572	80	32
G-30W1F	1500	2800	1480	2735	1335	478	1572	80	32
G-35W1F	1600	2800	1730	2735	1585	569	1588	80*2	32
G-40W1F	1700	3050	1780	2985	1635	638	1776	80*2	32
G-45W1F	1700	3050	1980	2985	1835	638	1776	80*2	32
G-50W1F	1700	3050	2180	2985	2035	638	1776	80*2	32

Note:

- 1.For G-02W1F-G-30W1F, the units have one water inlet pipe and one water outlet pipe. The diameter is shown in the table.
- 2.For G-35W1F-G-50W1F, the units have two water inlet pipes and two water outlet pipes. 80\*2 indicates that the diameter of the two water inlet pipes and water outlet pipes are DN80.
- 3.For G-02W1F-G-12W1F, the units have a single fan. For G-15W1F ~ G-50W1F the units have a double fan.
- 4.When G3 and G4 filters are used for horizontal type 1, the flange of return air outlet is increased from 45mm to 100mm.



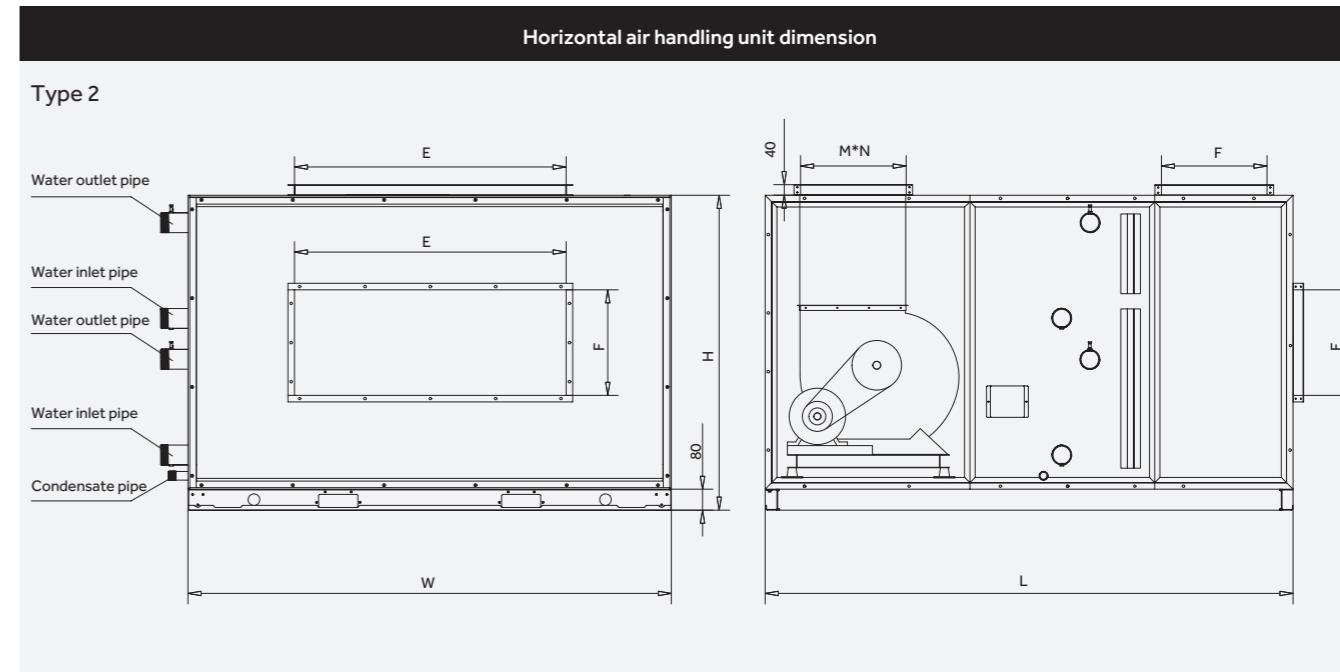


Model	Dimension(mm)							Water inlet/outlet pipe (DN)	Condensate water pipe (DN)
	L	W	H	E	F	M	N		
G-02W2F	1750	850	680	400	200	262	232	40	25
G-03W2F	1750	1000	680	400	250	262	295	40	25
G-04W2F	1800	1150	730	500	250	289	331	40	25
G-05W2F	1850	1200	830	630	250	341	395	50	25
G-06W2F	1850	1250	880	630	320	341	395	50	25
G-08W2F	2000	1400	980	630	320	404	471	50	25
G-10W2F	2100	1500	1080	800	320	478	430	50	25
G-12W2F	2100	1600	1180	1000	320	478	557	50	25
G-15W2F	2050	1850	1230	1000	400	404	1040	65	25
G-18W2F	2050	2250	1230	1250	400	404	1326	65	32
G-20W2F	2200	2500	1180	1250	400	478	1203	65	32
G-25W2F	2200	2800	1280	1600	400	478	1572	80	32
G-30W2F	2400	2800	1480	1600	500	478	1572	80	32
G-35W2F	2500	2800	1730	2000	500	569	1588	80*2	32
G-40W2F	2600	3050	1780	2000	500	638	1776	80*2	32
G-45W2F	2600	3050	1980	2000	630	638	1776	80*2	32
G-50W2F	2600	3050	2180	2000	630	638	1776	80*2	32

Note:

- 1.For G-02W2F-G-30W2F, the units have one water inlet pipe and one water outlet pipe. The diameter is shown in the table.
- 2.For G-35W2F-G-50W2F, the units have two water inlet pipes and two water outlet pipes. 80\*2 indicates that the diameter of the two water inlet pipes and water outlet pipes are DN80.
- 3.For G-02W2F-G-12W2F, the units have a single fan. For G-15W2F ~ G-50W2F the units have a double fan.

# Dimensions

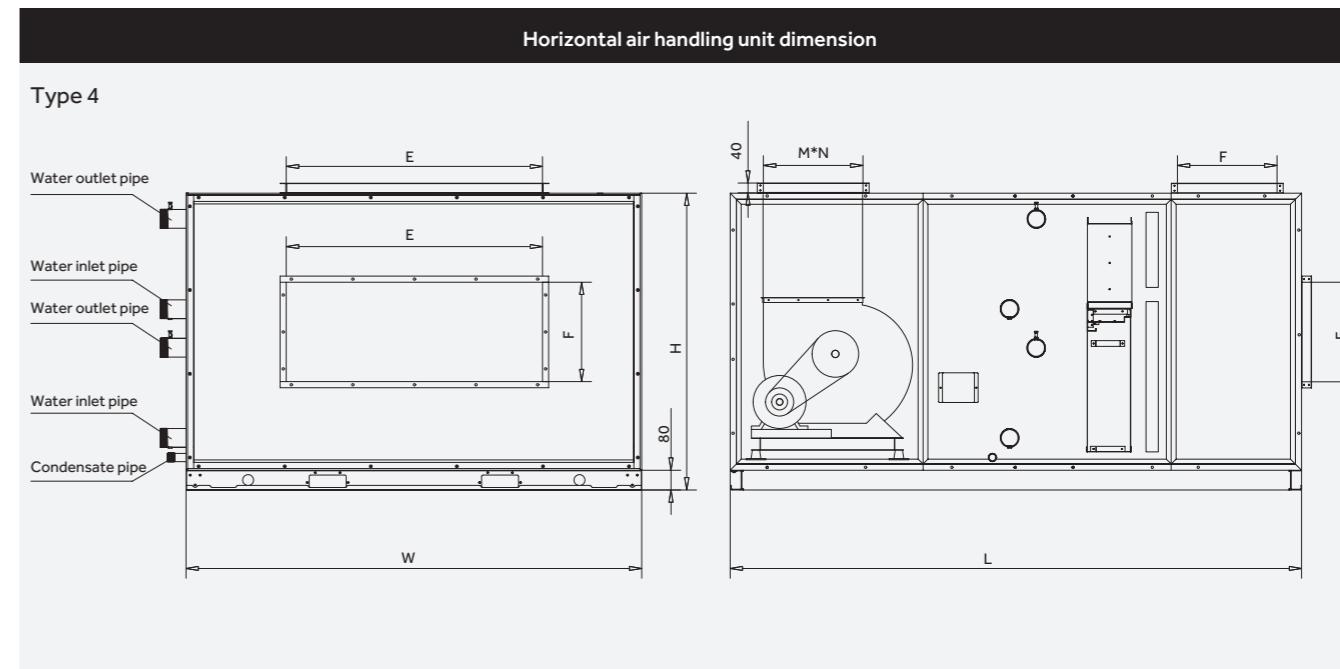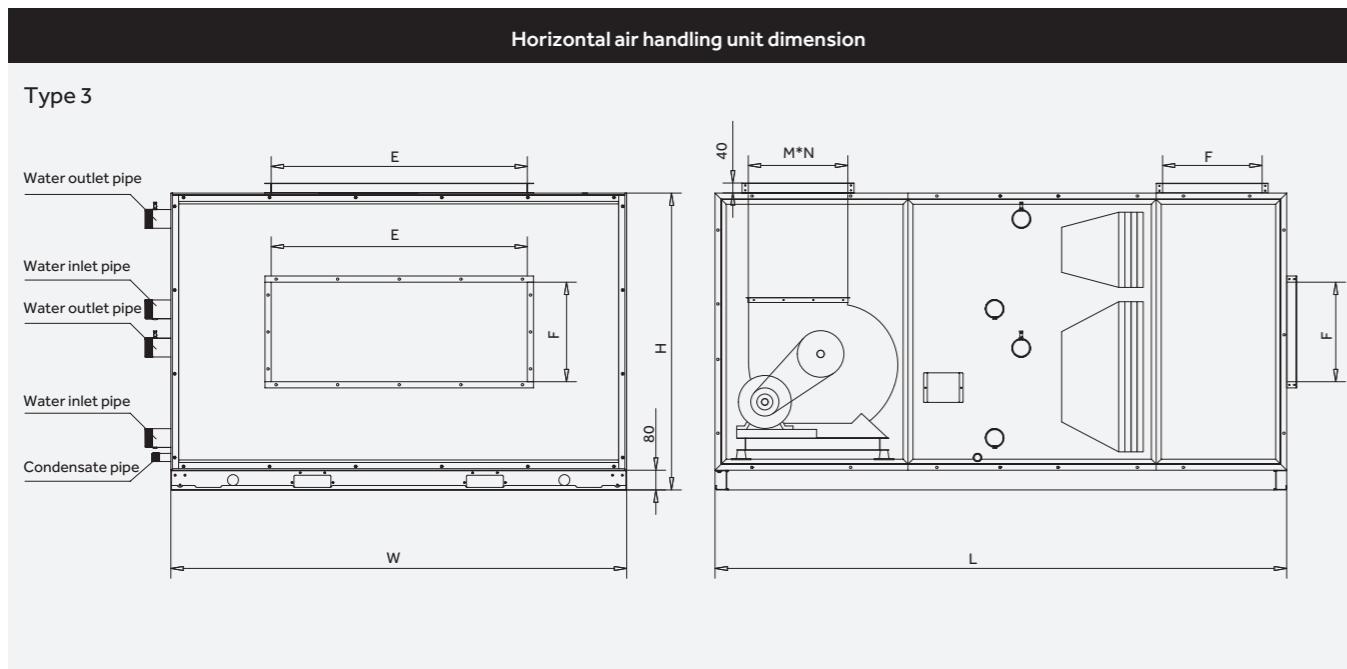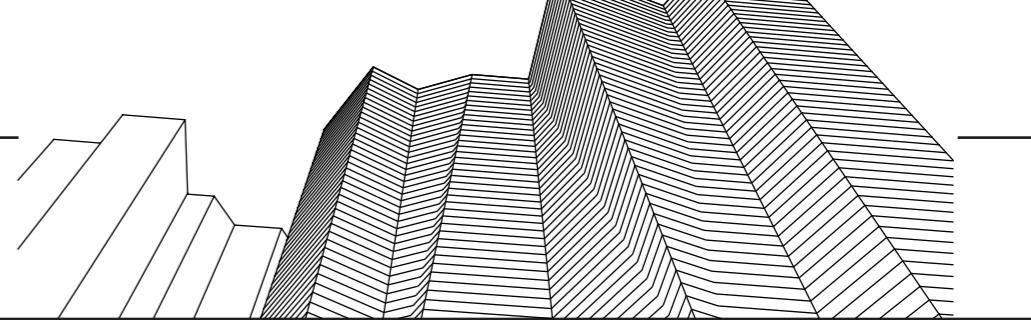

Model	Dimension(mm)							Water inlet/outlet pipe (DN)	Condensate water pipe (DN)
	L	W	H	E	F	M	N		
G-02W3F	2100	850	680	400	200	262	232	40	25
G-03W3F	2100	1000	680	400	250	262	295	40	25
G-04W3F	2150	1150	730	500	250	289	331	40	25
G-05W3F	2200	1200	830	630	250	341	395	50	25
G-06W3F	2200	1250	880	630	320	341	395	50	25
G-08W3F	2300	1400	980	630	320	404	471	50	25
G-10W3F	2450	1500	1080	800	320	478	430	50	25
G-12W3F	2450	1600	1180	1000	320	478	557	50	25
G-15W3F	2400	1850	1230	1000	400	404	1040	65	25
G-18W3F	2400	2250	1230	1250	400	404	1326	65	32
G-20W3F	2550	2500	1180	1250	400	478	1203	65	32
G-25W3F	2550	2800	1280	1600	400	478	1572	80	32
G-30W3F	2700	2800	1480	1600	500	478	1572	80	32
G-35W3F	2800	2800	1730	2000	500	569	1588	80*2	32
G-40W3F	2900	3050	1780	2000	500	638	1776	80*2	32
G-45W3F	2900	3050	1980	2000	630	638	1776	80*2	32
G-50W3F	2900	3050	2180	2000	630	638	1776	80*2	32

Note:

1.For G-02W3F-G-30W3F, the units have one water inlet pipe and one water outlet pipe. The diameter is shown in the table.

2.For G-35W3F-G-50W3F, the units have two water inlet pipes and two water outlet pipes. 80\*2 indicates that the diameter of the two water inlet pipes and water outlet pipes are DN80.

3.For G-02W3F-G-12W3F, the units have a single fan. For G-15W3F ~ G-50W3F the units have a double fan.

Model	Dimension(mm)							Water inlet/outlet pipe (DN)	Condensate water pipe (DN)	
	L	W	H	E	F	M	N			
G-02W4F	2100	850	680	400	200	262	232	40	25	
G-03W4F	2100	1000	680	400	250	262	295	40	25	
G-04W4F	2150	1150	730	500	250	250	289	331	40	25
G-05W4F	2200	1200	830	630	250	341	395	50	25	
G-06W4F	2200	1250	880	630	320	341	395	50	25	
G-08W4F	2300	1400	980	630	320	404	471	50	25	
G-10W4F	2450	1500	1080	800	320	478	430	50	25	
G-12W4F	2450	1600	1180	1000	320	478	557	50	25	
G-15W4F	2400	1850	1230	1000	400	404	1040	65	25	
G-18W4F	2400	2250	1230	1250	400	404	1326	65	32	
G-20W4F	2550	2500	1180	1250	400	478	1203	65	32	
G-25W4F	2550	2800	1280	1600	400	478	1572	80	32	
G-30W4F	2700	2800	1480	1600	500	478	1572	80	32	
G-35W4F	2800	2800	1730	2000	500	569	1588	80*2	32	
G-40W4F	2900	3050	1780	2000	500	638	1776	80*2	32	
G-45W4F	2900	3050	1980	2000	630	638	1776	80*2	32	
G-50W4F	2900	3050	2180	2000	630	638	1776	80*2	32	


Note:

1.For G-02W4F-G-30W4F, the units have one water inlet pipe and one water outlet pipe. The diameter is shown in the table.

2.For G-35W4F-G-50W4F, the units have two water inlet pipes and two water outlet pipes. 80\*2 indicates that the diameter of the two water inlet pipes and water outlet pipes are DN80.

3.For G-02W4F-G-12W4F, the units have a single fan. For G-15W4F ~ G-50W4F the units have a double fan.

# Specification

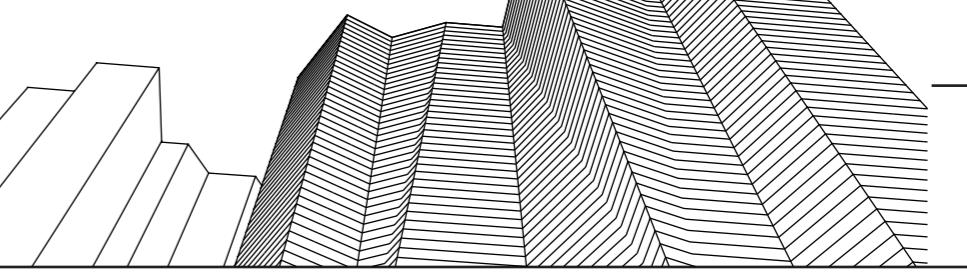

## Vertical type

### Standard cooling

Model	Nominal airflow (m³/h)	Nominal cooling capacity (kW)		Nominal heating capacity (kW)		Water flow rate (L/s)		Water pressure drop (kPa)		Noise dB(A)	Pipe diameter		Weight (kg)
		Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition		Water inlet/out pipe(DN)	Condensate water pipe(DN)	
G-02LFS	2000	11.8	25	18.9	27.6	0.57	1.2	13.1	8.7	58	40	25	132
G-03LFS	3000	17.9	38.1	28.3	41.2	0.85	1.82	26.6	17.4	58	40	25	145
G-04LFS	4000	24.5	52.2	38.2	55.7	1.17	2.49	45.1	29	60	40	25	163
G-05LFS	5000	28.2	65.7	46	69.6	1.35	3.14	9.2	39.5	62	50	25	188
G-06LFS	6000	33.9	78.8	54.5	83.5	1.62	3.77	9	38.6	62	50	25	211
G-08LFS	8000	46.1	106.8	74.5	112.2	2.2	5.1	13.2	56.9	64	50	25	251
G-10LFS	10000	58.3	134.2	93.5	140.3	2.79	6.41	16.8	72.2	66	50	25	325
G-12LFS	12000	71.2	148.8	113.3	163.3	3.4	7.11	20.8	21.1	68	50	25	365
G-15LFS	15000	91.3	189.9	142.9	205.5	4.36	9.07	34.3	34.9	70	65	25	426
G-18LFS	18000	111.4	231.1	172.4	247.6	5.32	11.04	57.7	58.4	70	65	32	491
G-20LFS	20000	125.9	260.7	198.2	284.8	6.01	12.45	39.2	39.8	72	65	32	556
G-25LFS	25000	159.9	330.1	249.6	358.2	7.64	15.77	55.6	54.9	72	80	32	651
G-30LFS	30000	191.9	396.1	299.7	429.8	9.17	18.93	54.9	54.9	75	80	32	770
G-35LFS	35000	223.9	469.2	349.7	506.1	10.7	22.42	54.3	27.8	75	80*2	32	950
G-40LFS	40000	231	541.7	376.4	579.8	11.04	25.88	18.5	40.7	78	80*2	32	1010
G-45LFS	45000	259.1	608.1	422.7	651.6	12.38	29.05	17.6	38.7	78	80*2	32	1072
G-50LFS	50000	289.3	678.8	471.7	726.9	13.82	32.43	17.3	38.2	78	80*2	32	1150

Note:

- 1.Standard return air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 27°CDB / 19.5°CWB.
- 2.Standard return air heating conditions: hot water inlet at 60°C; air inlet at 21°CDB. The water flow volume is the same to that of chilled water.
- 3.Standard fresh air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 35°CDB / 28°CWB.
- 4.Standard fresh air heating conditions: hot water inlet at 60°C; air inlet at 7°CDB. The water flow volume is the same to that of chilled water.
- 5.Power supply: 3PH/380V/50Hz

## Vertical type

### High cooling

Model	Nominal airflow (m³/h)	Nominal cooling capacity (kW)		Nominal heating capacity (kW)		Water flow rate (L/s)		Water pressure drop (kPa)		Noise dB(A)	Pipe diameter		Weight (kg)
		Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition	Return air condition	Fresh air condition		Water inlet/out pipe(DN)	Condensate water pipe(DN)	
G-02LFH	2000	14	31.7	21.9	32.7	0.67	1.51	4.1	16.3	58	40	25	138
G-03LFH	3000	21.4	47.9	32	48.8	1.02	2.29	18.2	33.2	58	40	25	152
G-04LFH	4000	29.4	64.9	44.4	65.5	1.41	3.1	13.9	55.3	60	40	25	171
G-05LFH	5000	36.9	81.4	55.2	81.9	1.76	3.89	19.2	76.1	62	50	25	198
G-06LFH	6000	44.3	97.8	66.8	98.3	2.12	4.67	19.2	76.1	62	50	25	224
G-08LFH	8000	60	127.8	89.6	130.3	2.87	6.11	28.5	35	64	50	25	268
G-10LFH	10000	75.6	160.5	112.2	163	3.61	7.67	36.6	44.9	66	50	25	341
G-12LFH	12000	91.8	194.3	135.4	196.4	4.38	9.28	45.2	55.1	68	50	25	392
G-15LFH	15000	118.3	245.5	170.1	246.3	5.65	11.73	69.4	89.5	70	65	25	455
G-18LFH	18000	141.2	285.6	204.5	292.1	6.75	13.65	82.9	57.2	70	65	32	532
G-20LFH	20000	152.4	320.8	228.7	331.8	7.28	15.33	25.4	37.4	72	65	32	598
G-25LFH	25000	193.1	405.2	287.6	416.4	9.22	19.36	35	53.1	72	80	32	699
G-30LFH	30000	231.7	486.2	345.2	499.7	11.07	23.23	35	53.1	75	80	32	829
G-35LFH	35000	270.3	567.2	402.7	582.9	12.91	27.1	35	53.1	75	80*2	32	1019
G-40LFH	40000	311.8	652.3	461.3	667.1	14.9	31.17	51.1	77.3	78	80*2	32	1124
G-45LFH	45000	350.1	732.9	518.6	750	16.73	35.01	48.7	73.7	78	80*2	32	1189
G-50LFH	50000	390.5	817	603.4	835.4	18.66	39.03	48	72.5	78	80*2	32	1286

Note:

- 1.Standard return air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 27°CDB / 19.5°CWB.
- 2.Standard return air heating conditions: hot water inlet at 60°C; air inlet at 21°CDB. The water flow volume is the same to that of chilled water.
- 3.Standard fresh air cooling conditions: chilled water inlet/outlet at 7 / 12°C; air inlet at 35°CDB / 28°CWB.
- 4.Standard fresh air heating conditions: hot water inlet at 60°C; air inlet at 7°CDB. The water flow volume is the same to that of chilled water.
- 5.Power supply: 3PH/380V/50Hz

# Specification

## Customizable external total pressure


Vertical type

Model	Airflow m³/h	Motor power (kW) corresponding to external total pressure (Pa)									
		120Pa	170Pa	220Pa	270Pa	320Pa	370Pa	420Pa	470Pa	520Pa	570Pa
G-02LFS	2000	0.37	0.37	0.55	0.55	0.55	0.55				
G-02LFH		0.37	0.55	0.55	0.55	0.55	0.75				
G-03LFS	3000	0.55	0.55	0.75	0.75	0.75	1.1				
G-03LFH		0.55	0.75	0.75	0.75	1.1	1.1				
G-04LFS	4000	0.75	0.75	0.75	1.1	1.1	1.1				
G-04LFH		0.75	0.75	1.1	1.1	1.1	1.1				
G-05LFS	5000	0.75	1.1	1.1	1.1	1.5	1.5				
G-05LFH		1.1	1.1	1.1	1.5	1.5	1.5				
G-06LFS	6000	1.1	1.1	1.5	1.5	1.5	2.2				
G-06LFH		1.1	1.5	1.5	1.5	2.2	2.2				
G-08LFS	8000		1.5	2.2	2.2	2.2	2.2	2.2	3		
G-08LFH			2.2	2.2	2.2	2.2	3	3	3		
G-10LFS	10000		2.2	2.2	3	3	3	3	3		
G-10LFH			2.2	3	3	3	3	3	4		
G-12LFS	12000		3	3	3	3	4	4	4		
G-12LFH			3	3	3	4	4	4	4		
G-15LFS	15000		4	4	4	4	5.5	5.5	5.5		
G-15LFH			4	4	4	5.5	5.5	5.5	5.5		
G-18LFS	18000		4	5.5	5.5	5.5	5.5	5.5	5.5		
G-18LFH			5.5	5.5	5.5	5.5	5.5	7.5			
G-20LFS	20000		5.5	5.5	5.5	7.5	7.5	7.5			
G-20LFH			5.5	5.5	7.5	7.5	7.5	7.5			
G-25LFS	25000			7.5	7.5	7.5	11	11	11		
G-25LFH				7.5	7.5	11	11	11	11		
G-30LFS	30000				11	11	11	15	15	15	
G-30LFH					11	11	15	15	15	15	
G-35LFS	35000				11	11	15	15	15	15	
G-35LFH					11	15	15	15	15	15	
G-40LFS	40000				15	15	15	15	15	18.5	
G-40LFH					15	15	15	15	18.5	18.5	
G-45LFS	45000				15	15	18.5	18.5	18.5	18.5	
G-45LFH					15	18.5	18.5	18.5	18.5	18.5	
G-50LFS	50000				18.5	18.5	18.5	22	22	22	
G-50LFH					18.5	18.5	22	22	22	22	

◆ The values in the table are motor power input under different external total pressure, the bold type values are the motor power input at the nominal pressure.

# Dimensions

## Vertical air handling unit dimension

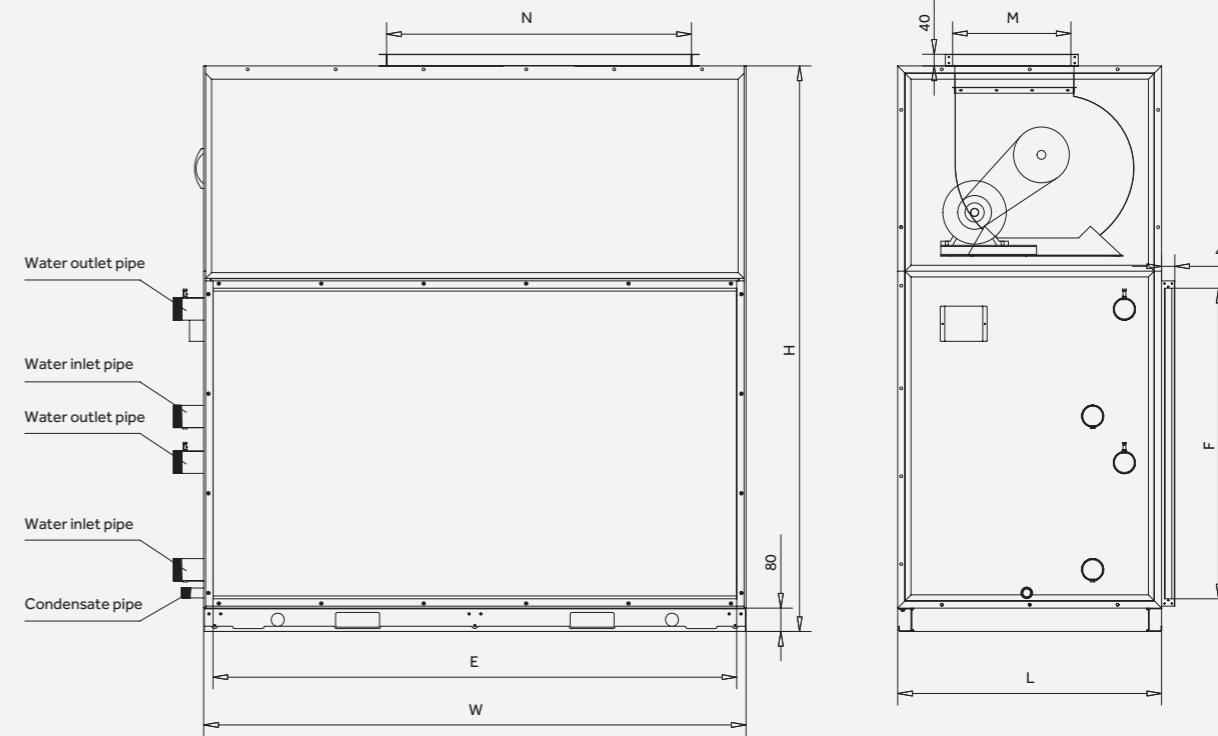

Model	Dimension(mm)							Water inlet/outlet pipe (DN)	Condensate water pipe (DN)
	L	W	H	E	F	M	N		
G-02LF	700	850	1130	785	535	262	232	40	25
G-03LF	700	1000	1180	935	535	262	295	40	25
G-04LF	700	1150	1280	1085	585	289	331	40	25
G-05LF	800	1200	1430	1135	685	341	395	50	25
G-06LF	800	1250	1480	1185	735	341	395	50	25
G-08LF	800	1400	1680	1335	835	404	471	50	25
G-10LF	900	1500	1880	1435	935	478	430	50	25
G-12LF	900	1600	1980	1535	1035	478	557	50	25
G-15LF	900	1850	1930	1785	1085	404	1040	65	25
G-18LF	900	2250	1930	2185	1085	404	1326	65	32
G-20LF	900	2500	2030	2435	1035	478	1203	65	32
G-25LF	1000	2800	2080	2735	1135	478	1572	80	32
G-30LF	1000	2800	2330	2735	1335	478	1572	80	32
G-35LF	1000	2800	2580	2735	1585	569	1588	80*2	32
G-40LF	1150	3050	2730	2985	1635	638	1776	80*2	32
G-45LF	1150	3050	2930	2985	1835	638	1776	80*2	32
G-50LF	1150	3050	3130	2985	2035	638	1776	80*2	32

Note:

1.For G-02LF-G-30LF, the units have one water inlet pipe and one water outlet pipe. The diameter is shown in the table.

2.For G-35LF-G-50LF, the units have two water inlet pipes and two water outlet pipes. 80\*2 indicates that the diameter of the two water inlet pipes and water outlet pipes are DN80.


3.For G-02LF-G-12LF, the units have a single fan. For G-15LF - G-50LF the units have a double fan.

# Modular Air Handling Unit





## Nomenclature

Haier modular air handling units are designed for central handling of air, including the essential function of ventilation, cooling, heating, heat recovery, humidification, dehumidification and cleaning, etc. this series has been designed to meet the requirements of all kinds of space cooling and heating, such as office buildings, shopping malls, hospitals, hotels, airports, railway stations, factories and other application scenarios.

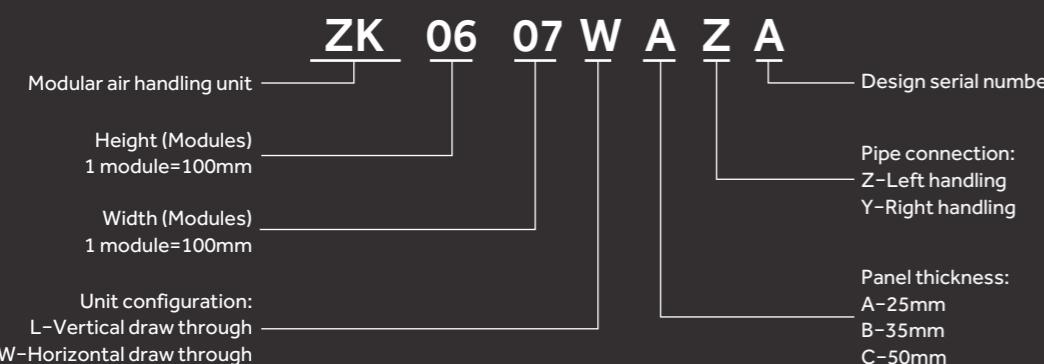

## Orientation

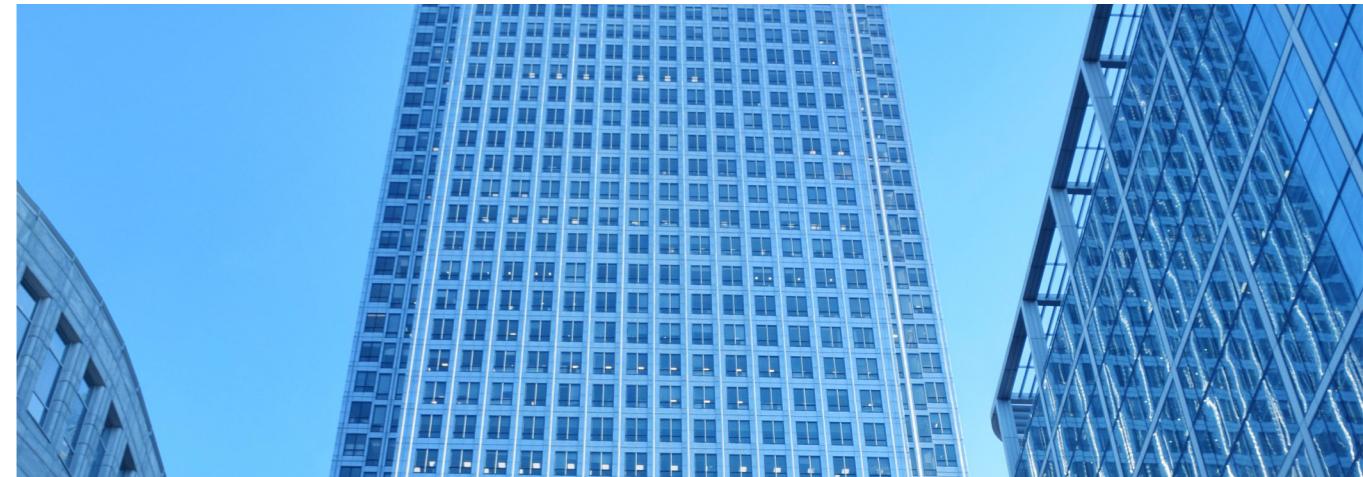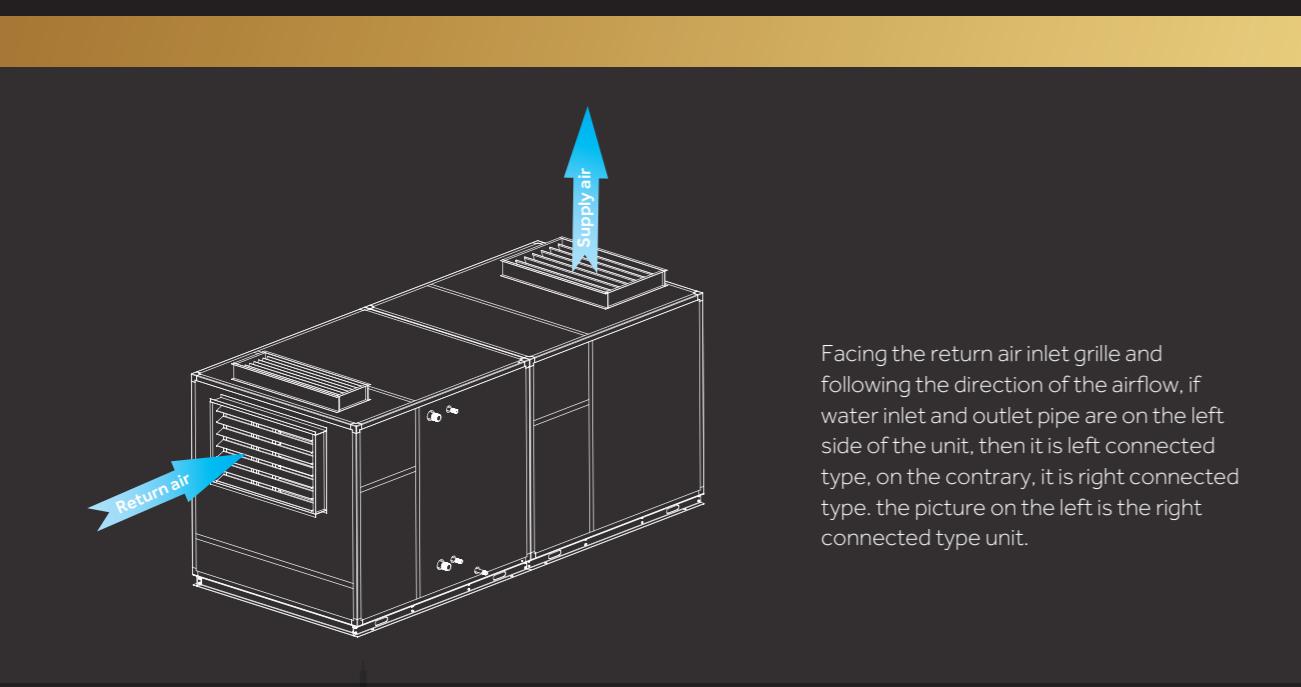


## High Efficiency

### Patented anti-cooled bridge design


Patented anti-cold bridge technology provides triple measures to prevent cold bridge, and condensation on the surface of the box.

- Paste PE thermal insulation materials to the metal inner plate to insulate cold, heat from transferring.
- Use PVC plastic insulating material jointing lap between the metal inner plate and the aluminum panel, to insulate cold, heat from transferring.
- Filling with environmental foaming material HFC-245fa, between the metal inner plate and metal panel, the surface of aluminum panel, the foam density is up to 50 kg/m<sup>3</sup> to insulate cold, heat from transferring.

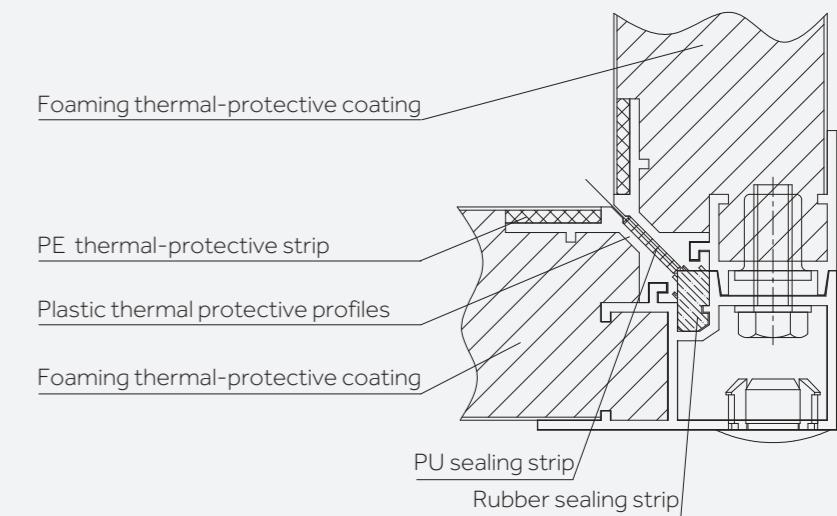

### High efficient heat exchanger

High quality seamless copper tube and corrugated hydrophilic aluminum foil ensure larger heat exchange area, optimal water circuits design, increased heat exchange efficiency and decreased water resistance, improving unit performance efficiency.

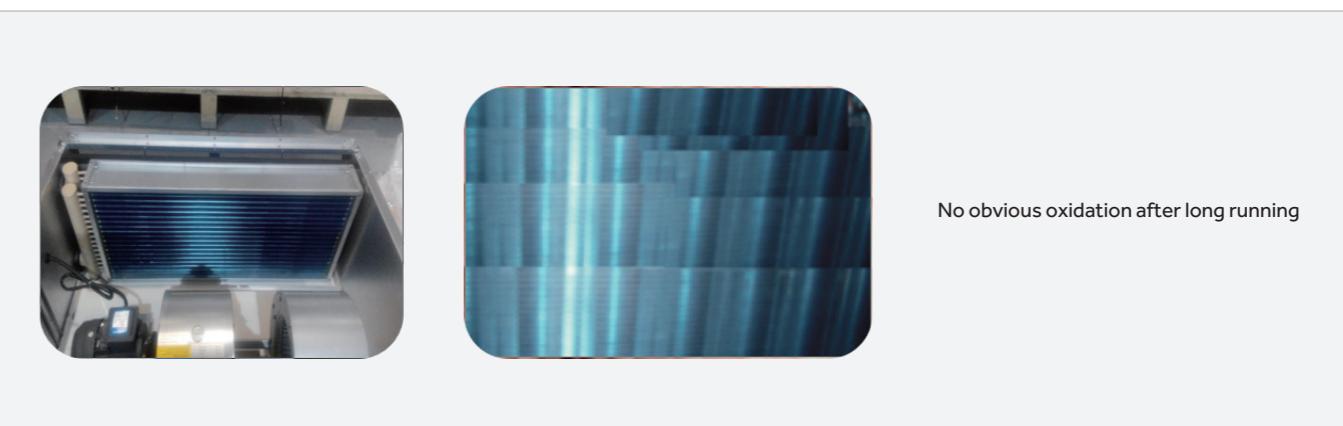


## ☀ Comfortable



### Low sound level

- Flexible connection at air outlet minimizes vibration transmission between fan and unit.
- In order to limit transmission of noise and vibration, the complete fan-motor subbase assembly is equipped with dampers.
- Before the fan leaves the factory, dynamic and static balance tests are carried out to ensure the fan operates efficiently with low noise.

## ✓ High Reliability

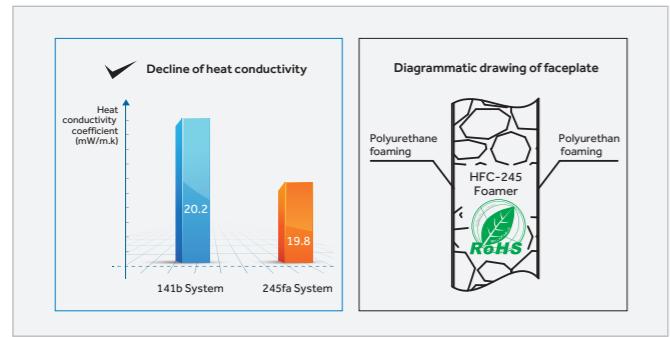

### Environmentally friendly materials

The panels are made of high-pressure polyurethane foam material, which uses special environmental protection foamer of HFC-245fa. It's harmless and environmental-friendly, with good heat isolation and sound insulation.

The thermal conductivity of box is no more than 0.0198 W/m°C, better than that of conventional 141 b foamer by more than 2%, to effectively insulate cold, heat from transferring and reduce the operating cost.

## Wide application

Haier modular AHU can be widely used in office buildings, shopping malls, hospitals, hotels, airports, railway stations, factories and other application scenarios, especially these have special requirements of environment space.



### Hospital

- According to the requirements of air purification, a stable high-precision control system is provided to automatically adjust the temperature and humidity.
- Setting the fresh air ratio for areas with different purification level, which can save energy and meet the demand for fresh air.
- Filter differential pressure alarm device is set to give intelligent warning of fouling along with filter to avoid pollution of clean air.
- Configure cooling, heating, humidification, purification and other functional sections according to the requirements of the using areas.

### Subway

- The primary filtration and electrostatic dust removal technology are adopted to ensure air quality.
- The use of micro-perforation or impedance sound attenuator provides a good noise reduction effect in a wide frequency range.
- The control cabinet with BAS interface can be configured to accept the monitoring of BAS system.
- It can be configured with high efficiency motor or inverter motor, which can save energy and reduce operating cost.

## 🔧 Convenient


### Flexible modular design

Haier modular air handling units are designed and manufactured in modular sections, which can be fully assembled in the factory before shipment or transported in sections and assembled on the job site. Major sections such as fans, coils, filters, etc. can be arranged in the sequence on request, giving complete flexibility of design.

### Easy maintenance

- The easy-to-move panels and access doors offer complete accessibility to fans, coils, filters and dampers.
- All basic component parts are standard and replaceable. Filter sections conform to international standards.

**AHRI CERTIFIED®**  
www.ahridirectory.org

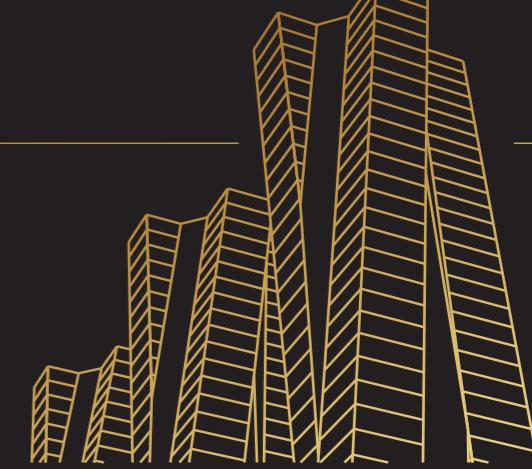

### Quick selection table for common units

Model	Rated air flow (m³/h)	Box inner dimension (mm)		Coils face area (m²)	Airflow (m³/h)				
		2.5m/s	Height (mm)		2.00m/s	2.25m/s	2.50m/s	2.75m/s	3.00m/s
ZK0607	1863	600	700	0.21	1490	1677	1863	2049	2236
ZK0608	2268	600	800	0.25	1814	2041	2268	2495	2722
ZK0710	3762	700	1000	0.42	3010	3386	3762	4138	4514
ZK0712	4752	700	1200	0.53	3802	4277	4752	5227	5702
ZK0812	5616	800	1200	0.62	4493	5054	5616	6178	6739
ZK0813	6201	800	1300	0.69	4961	5581	6201	6821	7441
ZK1012	7344	1000	1200	0.82	5875	6610	7344	8078	8813
ZK1013	8109	1000	1300	0.90	6487	7298	8109	8920	9731
ZK1014	8874	1000	1400	0.99	7099	7987	8874	9761	10649
ZK1016	10404	1000	1600	1.16	8323	9364	10404	11444	12485
ZK1216	12852	1200	1600	1.43	10282	11567	12852	14137	15422
ZK1218	14742	1200	1800	1.64	11794	13268	14742	16216	17690
ZK1320	18216	1300	2000	2.02	14573	16394	18216	20038	21859
ZK1416	15300	1400	1600	1.70	12240	13770	15300	16830	18360
ZK1418	17550	1400	1800	1.95	14040	15795	17550	19305	21060
ZK1420	19800	1400	2000	2.20	15840	17820	19800	21780	23760
ZK1522	23814	1500	2200	2.65	19051	21433	23814	26195	28577
ZK1618	20358	1600	1800	2.26	16286	18322	20358	22394	24430
ZK1620	22968	1600	2000	2.55	18374	20671	22968	25265	27562
ZK1622	25578	1600	2200	2.84	20462	23020	25578	28136	30694
ZK1624	28227	1600	2400	3.14	22582	25404	28227	31050	33872
ZK1626	30840	1600	2600	3.43	24672	27756	30840	33925	37009
ZK1820	25344	1800	2000	2.82	20275	22810	25344	27878	30413
ZK1822	28224	1800	2200	3.14	22579	25402	28224	31046	33869
ZK1826	33644	1800	2600	3.74	26915	30280	33644	37009	40373
ZK1828	36495	1800	2800	4.06	29196	32846	36495	40145	43794
ZK2022	31434	2000	2200	3.49	25148	28291	31434	34578	37721
ZK2024	34642	2000	2400	3.85	27714	31178	34642	38106	41570
ZK2026	37850	2000	2600	4.21	30280	34065	37850	41635	45420
ZK2224	38491	2200	2400	4.28	30793	34642	38491	42340	46189
ZK2226	42055	2200	2600	4.67	33644	37850	42055	46261	50466
ZK2426	46261	2400	2600	5.14	37009	41635	46261	50887	55513
ZK2428	50181	2400	2800	5.58	40145	45163	50181	55199	60217
ZK2628	54743	2600	2800	6.08	43794	49269	54743	60217	65692
ZK2630	59020	2600	3000	6.56	47216	53118	59020	64922	70824
ZK2830	63938	2800	3000	7.10	51151	57544	63938	70332	76726
ZK2832	68571	2800	3200	7.62	54857	61714	68571	75428	82286
ZK2834	73205	2800	3400	8.13	58564	65884	73205	80525	87845
ZK2836	77838	2800	3600	8.65	62270	70054	77838	85622	93405
ZK2838	82471	2800	3800	9.16	65977	74224	82471	90718	98965
ZK3038	88815	3000	3800	9.87	71052	79933	88815	97696	106578
ZK3040	93804	3000	4000	10.42	75044	84424	93804	103185	112565
ZK3042	98794	3000	4200	10.98	79035	88915	98794	108673	118553
ZK3546	126902	3500	4600	14.10	101522	114212	126902	139592	152283
ZK3749	143938	3700	4900	15.99	115150	129544	143938	158332	172726
ZK3755	155058	3700	5500	17.23	124046	139552	155058	170564	186069
ZK4355	181895	4300	5500	20.21	145516	163705	181895	200084	218274
ZK4361	203635	4300	6100	22.63	162908	183272	203635	223999	244362

Note: Due to the large number of models, the above table only lists the rapid selection of some commonly used models.

# Specification

## Return air cooling condition

Model	Rated air flow (m³/h)		2 rows coil			4 rows coil		
	2.5m/s	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	
ZK0607	1863	4.7	0.2	10.2	10.0	0.5	8.5	
ZK0608	2268	5.9	0.3	16.3	12.6	0.6	13.5	
ZK0710	3762	9.9	0.5	18.4	21.1	1.0	17.0	
ZK0712	4752	12.1	0.6	30.2	25.8	1.2	27.3	
ZK0812	5616	15.2	0.8	51.6	33.2	1.6	46.4	
ZK0813	6201	16.9	0.8	29.3	35.9	1.7	28.1	
ZK1012	7344	20.4	1.0	48.8	43.4	2.1	46.4	
ZK1013	8109	22.8	1.1	61.7	48.2	2.3	58.1	
ZK1014	8874	25.2	1.2	76.6	53.2	2.5	71.7	
ZK1016	10404	29.0	1.4	46.5	61.7	3.0	46.1	
ZK1216	12852	35.7	1.7	42.8	76.3	3.7	48.0	
ZK1218	14742	41.7	2.0	59.8	88.4	4.2	66.2	
ZK1320	18216	52.3	2.5	85.2	110.6	5.3	86.5	
ZK1416	15300	42.4	2.0	40.4	90.6	4.3	49.0	
ZK1418	17550	49.4	2.4	56.5	105.7	5.1	68.5	
ZK1420	19800	56.6	2.7	76.0	119.9	5.7	90.9	
ZK1522	23814	65.9	3.2	34.3	140.9	6.7	38.7	
ZK1618	20358	57.7	2.8	62.7	121.9	5.8	64.7	
ZK1620	22968	65.9	3.2	84.2	138.9	6.6	86.4	
ZK1622	25578	70.7	3.4	34.3	151.4	7.2	38.7	
ZK1624	28227	108.9	5.2	43.4	171.9	8.2	89.6	
ZK1626	30840	119.9	5.7	55.7	181.6	8.7	34.4	
ZK1820	25344	72.7	3.5	83.8	153.3	7.3	86.6	
ZK1822	28224	78.1	3.7	34.3	167.0	8.0	38.7	
ZK1826	33644	127.7	6.1	53.4	201.0	9.6	77.2	
ZK1828	36495	139.8	6.7	67.5	211.7	10.1	41.7	
ZK2022	31434	119.7	5.7	32.7	190.1	9.1	66.1	
ZK2024	34642	133.3	6.4	43.2	210.9	10.1	86.7	
ZK2026	37850	144.0	6.9	53.7	218.2	10.4	33.2	
ZK2224	38491	148.5	7.1	43.4	235.2	11.3	87.3	
ZK2226	42055	163.5	7.8	55.7	247.6	11.8	34.4	
ZK2426	46261	180.5	8.6	56.0	272.4	13.0	34.4	
ZK2428	50181	197.0	9.4	70.4	298.7	14.3	43.6	
ZK2628	54743	214.9	10.3	70.4	324.3	15.5	43.3	
ZK2630	59020	234.3	11.2	87.9	354.5	17.0	54.2	
ZK2830	63938	253.2	12.1	87.5	382.3	18.3	53.8	
ZK2832	68571	248.5	11.9	13.8	413.4	19.8	65.8	
ZK2834	73205	261.9	12.5	16.0	435.6	20.8	76.7	
ZK2836	77838	280.8	13.4	19.2	445.1	22.3	28.0	
ZK2838	82471	300.4	14.4	22.8	475.7	22.8	33.2	
ZK3038	88815	332.9	15.9	23.9	523.4	25.0	34.5	
ZK3040	93804	353.5	16.9	28.0	556.6	26.6	40.4	
ZK3042	98794	375.2	18.0	32.6	590.2	28.2	47.0	
ZK3546	126902	479.4	22.9	35.3	751.5	36.0	50.6	
ZK3749	143938	529.0	25.4	46.7	837.2	40.0	95.0	
ZK3755	155058	610.5	29.2	67.4	924.4	44.2	41.6	
ZK4355	181895	717.9	34.4	67.7	1084.4	51.8	41.6	
ZK4361	203635	811.4	38.8	93.1	1224.6	58.6	57.2	

Note:

1. Standard return air cooling condition: inlet air temperature is 27°C DB / 19.5°CWB.

2. Chilled water inlet temperature is 7°C, temperature difference between inlet and outlet water is 5°C.

3. Different circuit layout and sheet spacing of coils will lead to different cooling capacity. The specific parameters shall be subject to the design drawing.

4. Due to the large number of models, the above table only lists the performance data of some commonly used models.

## Return air cooling condition

Model	Rated air flow (m³/h)		6 rows coil			8 rows coil		
	2.5m/s	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	
ZK0607	1863	13.6	0.6	20.2	15.6	0.7	32.8	
ZK0608	2268	16.9	0.8	31.5	19.3	0.3	50.5	
ZK0710	3762	28.3	1.4	39.0	32.1	1.5	62.2	
ZK0712	4752	34.0	1.6	62.0	37.9	1.8	47.9	
ZK0812	5616	42.1	2.0	32.4	48.3	2.3	80.0	
ZK0813	6201	47.3	2.3	63.1	52.8	2.5	44.4	
ZK1012	7344	55.0	2.6	32.9	63.0	3.0	73.0	
ZK1013	8109	61.3	2.9	41.4	69.9	3.3	91.5	
ZK1014	8874	67.3	3.2	50.8	75.3	3.6	39.3	
ZK1016	10404	80.2	3.8	74.2	89.2	4.3	56.8	
ZK1216	12852	99.0	4.7	74.9	110.2	5.3	56.8	
ZK1218	14742	112.5	5.4	49.7	127.1	6.1	78.1	
ZK1320	18216	140.3	6.7	66.3	156.0	7.5	48.9	
ZK1416	15300	117.6	5.6	75.0	130.8	6.3	56.6	
ZK1418	17550	133.9	6.4	49.7	151.3	7.2	78.1	
ZK1420	19800	152.0	7.3	65.9	169.5	8.1	47.6	
ZK1522	23814	184.1	8.8	85.4	205.2	9.8	62.4	
ZK1618	20358	155.3	7.4	49.7	175.5	8.4	78.1	
ZK1620	22968	176.3	8.4	65.9	196.7	9.4	48.8	
ZK1622	25578	197.7	9.5	85.4	220.5	10.5	63.1	
ZK1624	28227	213.5	10.2	62.6	242.1	11.6	46.6	
ZK1626	30840	234.2	11.2	79.9	266.0	12.7	59.6	
ZK1820	25344	194.6	9.3	65.9	217.1	10.4	48.8	
ZK1822	28224	218.2	10.4	85.4	242.6	11.6	62.8	
ZK1826	33644	252.6	12.1	78.3	284.4	13.6	42.4	
ZK1828	36495	265.1	12.7	30.5	310.1	14.8	53.2	
ZK2022	31434	235.6	11.3	47.5	273.9	13.1	82.1	
ZK2024	34642	261.1	12.5	62.2	297.4	14.2	47.4	
ZK2026	37850	283.0	13.5	77.8	323.9	15.5	59.	

# Specification

## Fresh air cooling condition

Model	Rated air flow (m³/h)		2 rows coil			4 rows coil		
	2.5m/s	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	
ZK0607	1863	12.7	0.6	59.4	23.5	1.1	38.4	
ZK0608	2268	15.1	0.7	30.5	29.2	1.4	58.8	
ZK0710	3762	25.0	1.2	34.1	48.6	2.3	72.9	
ZK0712	4752	30.6	1.5	54.9	57.6	2.8	56.8	
ZK0812	5616	37.8	1.8	34.6	70.7	3.4	30.8	
ZK0813	6201	40.6	1.9	21.2	79.7	3.8	53.1	
ZK1012	7344	49.4	2.4	34.6	92.5	4.4	30.8	
ZK1013	8109	55.0	2.6	43.2	103.3	4.9	38.7	
ZK1014	8874	60.9	2.9	53.3	113.6	5.4	47.2	
ZK1016	10404	73.2	3.5	78.5	135.2	6.5	68.2	
ZK1216	12852	90.0	4.3	77.7	167.0	8.0	68.2	
ZK1218	14742	95.7	4.6	17.2	193.6	9.3	93.8	
ZK1320	18216	120.8	5.8	23.1	234.4	11.2	43.5	
ZK1416	15300	107.1	5.1	77.7	199.6	9.5	68.7	
ZK1418	17550	114.0	5.5	17.2	222.1	10.6	32.6	
ZK1420	19800	131.3	6.3	23.1	253.8	12.1	43.2	
ZK1522	23814	160.6	7.7	30.0	309.5	14.8	56.1	
ZK1618	20358	132.2	6.3	17.2	257.6	12.3	32.6	
ZK1620	22968	152.3	7.3	23.1	294.4	14.1	43.2	
ZK1622	25578	167.3	7.3	24.0	326.2	14.2	45.9	
ZK1624	28227	230.2	11.0	24.1	376.1	18.0	37.1	
ZK1626	30840	253.4	12.1	31.0	413.7	19.8	47.5	
ZK1820	25344	167.1	8.0	22.9	324.9	15.5	43.2	
ZK1822	28224	189.2	9.1	29.7	365.4	17.5	55.7	
ZK1826	33644	271.4	13.0	30.0	443.3	21.2	46.1	
ZK1828	36495	296.0	14.2	37.6	504.8	24.2	50.8	
ZK2022	31434	252.4	12.1	18.2	413.6	19.8	28.0	
ZK2024	34642	280.7	13.4	23.9	459.7	22.0	36.9	
ZK2026	37850	305.3	14.6	30.0	500.7	24.0	46.4	
ZK2224	38491	313.9	15.0	24.1	512.8	24.5	37.1	
ZK2226	42055	345.6	16.5	31.0	564.1	27.0	47.5	
ZK2426	46261	382.2	18.3	31.3	622.9	29.8	47.9	
ZK2428	50181	419.3	20.1	39.6	678.9	32.5	60.0	
ZK2628	54743	457.4	21.9	39.6	740.6	35.4	60.0	
ZK2630	59020	498.3	23.8	49.3	804.7	38.5	74.3	
ZK2830	63938	539.8	25.8	49.3	871.8	41.7	74.3	
ZK2832	68571	583.6	27.9	60.3	916.8	43.9	39.7	
ZK2834	73205	613.5	29.4	69.9	968.8	46.4	46.5	
ZK2836	77838	653.3	31.3	82.7	1037.6	49.6	55.5	
ZK2838	82471	696.4	33.3	66.7	1101.9	52.7	65.1	
ZK3038	88815	736.5	29.4	69.0	1211.4	58.0	67.4	
ZK3040	93804	782.6	31.2	80.7	1286.3	61.5	78.8	
ZK3042	98794	824.8	32.9	92.9	1356.3	64.9	90.8	
ZK3546	126902	1007.5	34.4	83.2	1725.6	82.6	97.4	
ZK3749	143938	1116.6	53.4	25.9	1826.4	87.4	39.9	
ZK3755	155058	1291.0	61.8	37.5	2102.9	100.6	57.4	
ZK4355	181895	1523.6	72.8	37.9	2466.8	118.0	57.4	
ZK4361	203635	1729.2	82.8	52.4	2791.7	133.6	79.0	

Note:

1. Standard fresh air cooling condition: inlet air temperature is 35°C DB / 28°C WB.

2. Chilled water inlet temperature is 7°C.

3. Different circuit layout and sheet spacing of coils will lead to different cooling capacity. The specific parameters shall be subject to the design drawing.

4. Due to the large number of models, the above table only lists the performance data of some commonly used models.

## Fresh air cooling condition

Model	Rated air flow (m³/h)		6 rows coil			8 rows coil		
	2.5m/s	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	Cooling capacity (kW)	Water flow rate (L/s)	water resistance (kPa)	
ZK0607	1863	29.5	1.4	78.9	32.7	1.6	57.1	
ZK0608	2268	35.3	1.7	36.9	40.2	1.9	86.6	
ZK0710	3762	59.0	2.8	47.2	65.4	3.1	36.5	
ZK0712	4752	71.0	3.4	74.4	78.6	3.8	57.2	
ZK0812	5616	88.7	4.2	61.5	98.4	4.7	43.5	
ZK0813	6201	97.0	4.6	38.2	109.5	5.2	58.7	
ZK1012	7344	116.0	5.6	61.5	128.8	6.2	45.5	
ZK1013	8109	129.0	6.2	77.0	143.1	6.8	56.8	
ZK1014	8874	138.2	6.6	32.7	157.1	7.5	69.4	
ZK1016	10404	163.7	7.8	46.9	181.7	8.7	34.0	
ZK1216	12852	202.2	9.7	46.9	224.4	10.7	34.0	
ZK1218	14742	235.0	11.2	64.7	259.8	12.4	46.7	
ZK1320	18216	291.8	14.0	85.3	323.3	15.5	61.7	
ZK1416	15300	241.4	11.6	47.1	267.2	12.8	34.0	
ZK1418	17550	278.9	13.3	64.4	309.3	14.8	46.7	
ZK1420	19800	317.1	15.2	85.3	351.4	16.8	61.7	
ZK1522	23814	379.9	16.5	91.3	425.1	20.3	79.4	
ZK1618	20358	324.5	15.5	64.7	358.8	17.2	46.7	
ZK1620	22968	367.9	17.6	85.3	407.6	19.5	61.7	
ZK1622	25578	408.1	17.8	91.3	456.6	21.8	79.4	
ZK1624	28227	468.0	22.4	80.8	526.8	25.2	60.3	
ZK1626	30840	508.7	22.1	86.0	578.0	27.7	76.9	
ZK1820	25344	405.9	19.4	85.3	449.8	21.5	61.7	
ZK1822	28224	450.3	19.6	91.3	502.4	24.0	79.0	
ZK1826	33644	543.4	26.0	44.8	625.0	29.9	75.7	
ZK1828	36495	611.3	29.2	48.3	694.3	33.2	80.0	
ZK2022	31434	517.4	24.8	61.5	581.8	27.8	45.8	
ZK2024	34642	574.4	27.5	80.8	646.5	30.9	60.3	

# Specification

## Return air heating condition

Model	Rated air flow (m³/h)		2 rows coil			4 rows coil		
	2.5m/s	Heating capacity(kW)	Water flow rate (L/s)	water resistance (kPa)	Heating capacity(kW)	Water flow rate (L/s)	water resistance (kPa)	
ZK0607	1863	10	0.3	2.5	16	0.4	2.4	
ZK0608	2268	13	0.3	4.4	20	0.5	4.2	
ZK0710	3762	22	0.5	11.3	35	0.8	9.7	
ZK0712	4752	29	0.7	22	45	1.1	18.7	
ZK0812	5616	34	0.8	23.1	53	1.3	18.7	
ZK0813	6201	38	0.9	30.5	59	1.4	24.6	
ZK1012	7344	45	1.1	25.3	69	1.7	18.7	
ZK1013	8109	51	1.2	33.5	77	1.9	24.7	
ZK1014	8874	53	1.3	6.9	84	2	31.7	
ZK1016	10404	64	1.5	11	100	2.4	49.4	
ZK1216	12852	78	1.9	11	120	2.9	15.4	
ZK1218	14742	94	2.3	17.1	138	3.4	22.8	
ZK1320	18216	117	2.8	24.2	172	4.1	31.5	
ZK1416	15300	97	2.4	71	142	3.83	15.2	
ZK1418	17550	113	2.8	17	164	4	22.3	
ZK1420	19800	127	3.1	24.2	186	4.5	31.4	
ZK1522	23814	153	3.7	32.9	222	5.4	41.4	
ZK1618	20358	130	3.1	17.1	190	4.5	21.7	
ZK1620	22968	148	3.6	24.2	213	5.2	30.5	
ZK1622	25578	166	4	32.9	239	5.8	41.3	
ZK1624	28227	170	4.5	18	268	6.5	12.7	
ZK1626	30840	186	4.8	23	291	7	16.3	
ZK1820	25344	158	4.4	31	239	5.8	30.4	
ZK1822	28224	178	4	23	268	6.5	41.2	
ZK1826	33644	204	5	24.2	301	7.3	30.3	
ZK1828	36495	224	5.4	30.5	328	8	38.2	
ZK2022	31434	190	4.6	14.2	278	6.7	19	
ZK2024	34642	209	5	18.8	309	7.6	25.5	
ZK2026	37850	230	5.6	24.2	338	8.3	33	
ZK2224	38491	232	5.6	18.8	343	8.3	25.2	
ZK2226	42055	256	6.2	24.2	377	9.1	32.5	
ZK2426	46261	281	6.8	24.2	414	10.1	32.5	
ZK2428	50181	307	7.4	30.5	451	10.6	40.5	
ZK2628	54743	334	8.2	30.5	492	12	38.2	
ZK2630	59020	362	8.8	37.9	532	12.8	47.3	
ZK2830	63938	393	9.5	37.9	574	13	23	
ZK2832	68571	405	9.8	6.2	618	13.9	28	
ZK2834	73205	435	10.6	7.5	663	15	34	
ZK2836	77838	456	11.3	9	706	16	40	
ZK2838	82471	496	12.1	10.6	710	17.1	11	
ZK3038	88815	534	13	10.6	746	18	11.4	
ZK3040	93804	568	13.8	12	790	19.2	13.4	
ZK3042	98794	600	14.6	14.5	836	20.1	15.5	
ZK3546	126902	778	18.7	19.1	1081	26.3	20.5	
ZK3749	143938	887	21.4	23.1	1230	30	24.8	
ZK3755	155058	960	23.2	28.7	1331	32.4	30.7	
ZK4355	181895	1127	18.3	28.7	1561	37.8	30.7	
ZK4361	203635	1269	30.8	39.7	1759	38.7	42.3	


Note:

1. Standard return air heating condition: inlet air temperature is 20°C.
2. Hot water inlet temperature is 60°C, temperature difference between inlet and outlet water is 10°C.
3. Different circuit layout and sheet spacing of coils will lead to different cooling capacity. The specific parameters shall be subject to the design drawing.
4. Due to the large number of models, the above table only lists the performance data of some commonly used models.

## Return air heating condition

Model	Rated air flow (m³/h)		2 rows coil			4 rows coil		
	2.5m/s	Heating capacity(kW)	Water flow rate (L/s)	water resistance (kPa)	Heating capacity(kW)	Water flow rate (L/s)	water resistance (kPa)	
ZK0607	1863	16	0.4	5.3	25	0.6	4.8	
ZK0608	2268	20	0.5	9.2	30	0.7	8.3	
ZK0710	3762	34	0.8	23.2	51	1.2	19.3	
ZK0712	4752	43	1	44.6	66	1.6	36.8	
ZK0812	5616	51	1.2	46.7	78	1.9	36.8	
ZK0813	6201	57	1.4	61.7	86	2.1	48.4	
ZK1012	7344	67	1.6	49.7	101	2.5	36.8	
ZK1013	8109	74	1.8	65.6	112	2.7	48.5	
ZK1014	8874	80	1.9	14.1	124	3	62.2	
ZK1016	10404	94	2.3	22.2	146	3.5	96.6	
ZK1216	12852	117	2.8	22.2	176	4.3	30.6	
ZK1218	14742	135	3.3	32.8	203	4.9	45	
ZK1320	18216	168	4.1	46.2	248	6	60.7	
ZK1416	15300	139	3.4	22.2	208	5	30	
ZK1418	17550	161	3.9	32.8	240	5.8	44.1	
ZK1420	19800	183	4.4	46.2	273	6.6	61.8	
ZK1522	23814	221	5.4	62.7	325	7.9	81.5	
ZK1618	20358	187	4.5	32.8	276	6.7	42.9	
ZK1620	22968	212	5.1	46.2	313	7.6	60.2	
ZK1622	25578	238	5.8	62.7	349	8.5	81.3	
ZK1624	28227	245	6	36	390	9.4	25	
ZK1626	30840	270	6.5	46	426	10.3	32.1	
ZK1820	25344	232	5.6	46	350	8.6	60	
ZK1822	28224	262	6.4	62.7	392	9.5	81	
ZK1826	33644	302	7.4	48.3	440	10.8	60	
ZK1828	36495	328	8	60.8	480	11.6	75.2	
ZK2022	31434	279	6.8	28.5	409	10	38.5	
ZK2024	34642	309	7.5	37.6	452	11	50.5	
ZK2026	37850	339	8.3	48.3	496	12.1	65	
ZK2224	38491	344	8.4	37.6	504	12.2	50	
ZK2226	42055	376	9.2	48.3	552	13.4	64	
ZK2426	46261	414	10.1	48.3	607	14.7	63.5	
ZK2428	50181	452	10.8	60.8	660	16	80	
ZK2628	54743	492	12	60.8	720	17.4	75.2	
ZK2630	59020	534	13	75.2	778	18.8	91	
ZK2830	63938	577						

# Functional sections

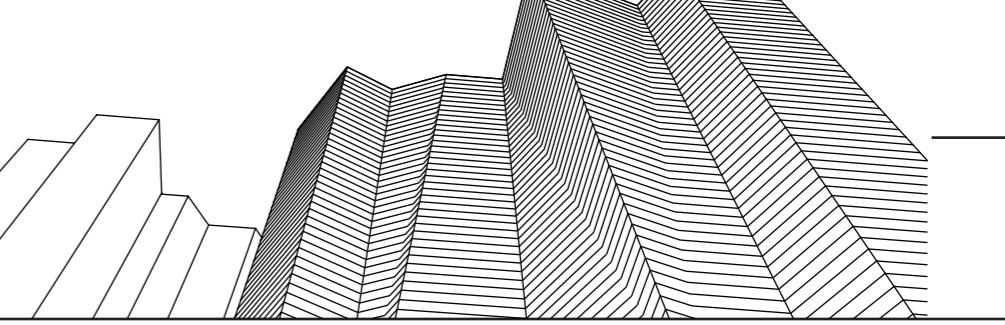

## Functional sections description

Functional sections		Sketch	Section length (mm)	Description	Options/accessories	Note
Mixing box section			600-1400	Providing chamber for mixing the outside fresh air with recirculated return air.	Air flange connection; Manual air valve; Electric air valve without actuator; Electric air valve without actuator with switch actuators; Access panel;	
Filter section	Plate filter		100	Generally set after the mixing box section for preliminary filtration of mixed air.	EN Class: G2/G3/G4/M5 available on request; Differential manometer; Differential pressure switch;	Primary and secondary plate filters can be selected and placed in the mixing box section or outside of the unit to save space.
	Bag filter Pleated filter		500	The bag filter is normally used for the pretreatment before the HEPA. The pleated filter is normally used in scenarios with high purification level requirements.	Differential manometer; Differential pressure switch;	
Fresh air and exhaust air section			1200-2800	Be able to modulate the exhaust air volume, fresh air and return air ratio.	Air flange connection; Manual air valve; Electric air valve without actuator; Electric air valve without actuator with switch actuators; Access panel;	
Chilled water coil section			600-1200	The cooling heat exchanger can provide 4 rows, 6 rows or 8 rows of coils according to the different cooling capacity. The aluminum fin adopts hydrophilic material, and the baffle plate can be set to prevent the water droplets blown off the coil.	Copper and steel tube; Pipe connection direction; Water baffle plate;	
Heating coil section			300/600	Provide 2 rows and 4 rows of coils according to the different heating capacity.	Copper and steel tube; Pipe connection direction;	
Electric heater section			300	Realize booster electric heater function.	Power input of heating	
Humidifier section	Steam humidifier		600	Provide 1 row and 2 rows of coils according to the different heating capacity.		If installed behind fan section, L=900
	Wet film humidifier		600	Using wet film to absorb water and vaporize the water by air stream flowing through it. It has the effect of washing the air and can be used for droplets eliminator at the same time.	Humidifying capacity; Domestic tap water/ recirculation water	When using domestic tap water, the section is installed behind the cooling coil section and takes up no space. When using recirculation water, the section is installed individually and the installation space depends on the actual using.
	High-pressure spray humidifier		900	High humidification capacity and efficiency, with automatic control interface, no water protection function.		A baffle is needed


## Functional sections description

Functional sections		Sketch	Section length (mm)	Description	Options/accessories	Note
Fan section			700-3500	High efficiency centrifugal fan is adopted, and different air supply modes can be adopted according to requirements.	Air flange connection; Manual air valve; Electric air valve without actuator; Electric air valve without actuator with switch actuators; Access panel;	Variable-frequency drive; Start cabinet; Window;
Diffuser section			600	Generally installed behind the fan section	EN Class: G2/G3/G4/M5 available on request; Differential manometer; Differential pressure switch;	Access panel;
Sound attenuator section			600/900/1200	Different type of sound attenuator can be selected to meet different requirements.	Differential manometer; Differential pressure switch;	
Middle section			600	Repair or maintain functional components.	Air flange connection; Manual air valve; Electric air valve without actuator; Electric air valve without actuator with switch actuators; Access panel;	Access panel; Manual air valve;
Air outlet section			600-1400	Both side air outlet and up air outlet are available on request.	Copper and steel tube; Pipe connection direction; Water baffle plate;	Air flange connection; Manual air valve; Electric air valve without actuator; Electric air valve without actuator with switch actuators; Access panel;
Electronic air cleaner			300	According to the principle of positive and negative phase absorption, the particulate matter will be killed and adsorbed on the integrated plate by the energy released instantaneously by the high-pressure electric charge, so as to achieve the purpose of dust removal and sterilization.	Copper and steel tube; Pipe connection direction;	
Active carbon			Plate type: 100, box type: 400	Adsorb formaldehyde, benzene, TVOC.	Power input of heating	
Air purification section	UV-C sterilization		Placed in the air outlet section	Photonic energy can destroy the molecular structure of microbe DNA and RNA, making them subjected breakage or photochemical reaction to lose the ability to reproduce.		
	Ozone sterilization		Placed in the air outlet section	Ozone can be easily decomposed into oxygen and oxygen atoms at room temperature. They can oxidize and decompose the necessary enzymes of bacteria or react directly with bacteria and viruses to destroy their cells and decompose the DNA of cells, resulting in the lytic extinction of parasitic bacteria and virus particles.	Humidifying capacity; Domestic tap water/ recirculation water	
	Photocatalyst air purifier		300	Decompose the molecular structure of harmful substances in the air, inhibit the growth of bacteria and the activity of viruses, so as to achieve the purpose of sterilization, air purification, deodorization, antivirus.		

# Functional sections

## Electric heater section


The electric heater adopts PTC heating elements, which are fitted on a frame. it is suitable for the situation without steam, but it consumes a lot of power, so it should be selected carefully.



### Precautions for use and maintenance:

1. The electric heater must be used in a ventilated environment. there shall be an interlocking device between the electric heater and the ventilation fan to ensure that the heater must be powered on after the fan is started and disconnected before the fan is turned off.
2. The electric heater housing must be grounded during installation.
3. The insulation resistance must be checked when using the heater for the first time. only when the insulation resistance is greater than 1MQ can the heater be used normally. damp and poor insulation caused by long term disuse or improper storage can be recovered by heat drying or electrified self-drying.
4. Thermal insulation measures shall be taken for the heater and its connected pipes. while, in use, the fouling on the heater and outside pipes should be removed frequently, but no sharp metal can be used to avoid scratching.
5. The power must be cut off before maintenance. the heat recovery is available in wheel type and plate type.

## Fan section



The fan section adopts centrifugal fan with forward inclined-airfoil blades, backward inclined-curved blades or backward inclined-airfoil blades. the fan, motor and base are integrated combined, and the base is equipped with damper. flexible connection at air outlet minimizes vibration transmission between fan and unit. static and dynamic balance testing is carried out for optimal fan selection to ensure the fan operates efficiently with low noise.

The driving mode is belt drive.

Note: Single-speed motors (2-pole, 4-pole, 6-pole, and 8-pole), double-speed motors, three-speed motors and inverter motors are optional according to the customer demands.

## Heat recovery section

The heat exchanger of the heat recovery section is available in rotary type and plate type. up-down arrangement or left-right arrangement of the supply air and return air is available on request.

### Rotary heat recovery system



The rotary heat recovery section consists of housing, honeycomb rotary regenerative wheel, power driven system and sealing elements. the hot exhaust air and cold fresh air pass through the rotary wheel in a cross-flow. the wheel rotates continuously to transfer the heat and moisture from the exhaust air to the fresh air.

The rotary wheel can be divided into sensible heat type and total heat type with a recovery efficiency of 70%- 80%, resulting in significant energy savings. this type of section is small and short and can be cleaned by water or air. air bypass is installed for capacity regulation and anti-freeze protection.

### Plate heat recovery system

The plate heat recovery section is composed of diagonal plate heat exchanger, housing, and sealing elements, etc. the hot exhaust air and cold fresh air pass through the heat exchanger in a cross-flow and transfer the heat and moisture with each other.

It can be divided into sensible heat type and total heat type, with a recovery efficiency of 45%- 75%. it has high operational safety as it can completely separate the airflow. with no moving parts, it needs less maintenance. air bypass is installed for capacity regulation and anti-freeze protection.

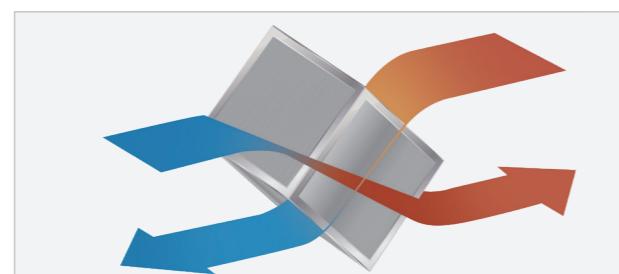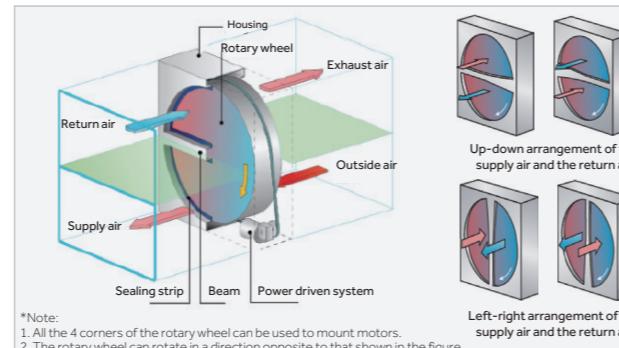

## Filter section

The unit can be configured with primary efficiency, medium efficiency, sub-high efficiency, and high efficiency filters. by default, the unit is configured with two types of filters, primary efficiency plate filter (Grade G3) and medium efficiency bag filter (Grade F5).





Plate filter



Bag filter

### Filter type

**Primary efficiency filter:** Plate type and bag type, with non-woven fabrics as filter materials and filtration efficiency of G3 (80%- 90%; gravimetric method)

**Medium efficiency filter:** Bag type, with non-woven fabrics as filter materials and filtration efficiency of F5 (40%- 60%; colorimetric method)

**Medium-high efficiency/sub-high efficiency filter:** With ultra-fine fiber glass as filter materials and filtration efficiency of F7- F9 (80%- 95%; colorimetric method)

**High-efficiency filter:** If sub-high efficiency and high efficiency filters are needed to be installed in modular air handling unit, please contact Haier local agencies.

**Activated carbon filter:** made from a variety of organic chemical fibers upon carbonization and activation and mainly used to remove the odors and low-density gas pollution sources in the air environment.

The resistance of a filter falls between the initial resistance and the final resistance. the initial resistance refers to the resistance of a filter without dust, while the final resistance refers to the air resistance when the filter has been stained with dust after a period of use and needs to be cleaned or scrapped. the final resistance of the filter is not a fixed value because it depends on the cleanliness requirement of the using environment and the degree of outdoor air pollution.

Haier provides optional differential manometer and differential pressure switch, which can be used to control the differential pressure alarm.

Note: Following options are available depending on the customer demands:

1. A nylon filter screen is optional (placed outside the unit).
2. The plate filter and the bag filter are of the same section size, but different thickness of 46mm and 381mm respectively.
3. The external filter can be pushed out from the side, while the built-in filter needs to be taken out from the front.

### Efficiency specification reference table:


	China	Primary efficiency $\geq 5\mu\text{m}$	Medium efficiency $\geq 1\mu\text{m}$	Medium-high efficiency $\geq 1\mu\text{m}$	Sub-high efficiency $\geq 0.5\mu\text{m}$	High efficiency $\geq 0.5\mu\text{m}$
GB/T 14295	80% > Efficiency $\geq 20\%$	70% > Efficiency $\geq 20\%$	99% > Efficiency $\geq 70\%$	99.9% > Efficiency $\geq 95\%$	Efficiency $\geq 99.99\%$	
US ASHRAE	C1 C2-C4 L5 L6 L7 L8 M9 M10 M11 M12 M13 M14			H12-H16	VH17 VH18 VH19 VH20	
Europe	New standards G1 G2 G3 G4 F5 F6 F7 F8 F9 H10 H11 H12 H13 H14 V15,V17					
	Efficiency 65% 80% 80-90% >90% 40% 60% 80% 90% 86% 95% 99% 99.9% 99.995% 99.995% 99.995%					
	Old standards EU1 EU2 EU3 EU4 EU5 EU6 EU7 EU8 EU9 EU10 EU11 EU12 EU13 EU14					

### Filter resistance:

Filter model	Filter grade	Filter efficiency (%)	Filter length (mm)	Recommended final resistance (Pa)				
				2m/s	2.25m/s	2.5m/s	2.75m/s	3.0m/s
Bag filter	G3	80-90	500	50	60	70	90	110
	G4	>90	500	70	80	90	127.5	165
	F5	40-60	500	80	90	100	137.5	175
	F6	60-80	500	100	110	130	155	180
	F7	80-90	500	160	190	220	252.5	285
	F8	90-95	500	210	230	250	305	360
Medium-high efficiency and sub-high efficiency filters (Pleated type)	F7	80-90	292	90	110	130	162.5	195
	F8	90-95	292	120	145	170	200	230
	F9	>95	292	160	185	210	250	290
	H10	>85	292	190	220	250	290	330
	G3	80-90	46	60	85	110	122.5	135
	G4	>90	46	90	120	150	167.5	185
Plate filter	F5	40-60	46	140	170	200	220	240

# Functional sections

## Chilled water coil section

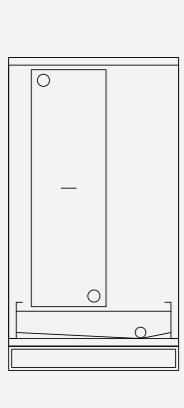

### Coil type

Coils are constructed from copper tubes and mechanically expanded into continuous corrugated aluminum fins. the fins are double V type, and the copper coils are available in diameter of Ø9.52and Ø12.7. the surface of the coils does not gather dust and is easy to clean, which can effectively prevent the breeding of bacteria. each coil is carefully cleaned to ensure the surface cleanliness of the heat exchanger, thus guaranteeing the heat transfer effects.

### Water baffle plate

A water baffle plate (a grid water baffle plate is recommended) must be provided when the face velocity is too high. the water baffle plate adopts corrugated multi-folded profiles, which can prevent most of the water droplets in the airflow and enable them to flow into the water pan. this measure is especially important for regions with high temperature, high humidity, and application scenarios with large fresh air volume.

### Mounting types and tests


The condensate drain pan is made of high-quality plastic-coated cold-rolled materials. it has a large drainage slope to facilitate the full drainage of condensate and avoid ponding. the coils are installed in the fixed chute for easy maintenance. all coils should pass pressure-tight and leakage tests.

#### Notes:

1. The heater with hot water temperature above 85°C shall be kept away from the fan section or located in the positive pressure zone to prevent the damage caused by liquefaction of the grease in the fan and the motor bearings.


2. When the modular air handling unit is used in the cold regions, a pre-heater shall be provided, or the heater section shall be placed in front of the chilled water coil section, and the water in the chilled water coil shall be drained off during winter.

## Steam heating section



Considering the high temperature, high pressure and big temperature variations of the steam and other factors, a steam heater with a construction different from that of the hot water heater should be selected. generally, the heater is made up of steel tubes encircled by steel sheet, which has high heat transfer efficiency, shall be used. It can be selected separately according to the actual heating demands.

## Humidifier section



The optional humidifier forms include dry steam humidifier, high-pressure spray humidifier, wet film humidifier, and electrode humidifier, etc.


### Humidification mode:

- \* High-pressure spray humidification- It uses stainless steel water distribution pipes and nozzles for pressurized spraying, which is efficient, energy-saving, and reliable.
- \* Wet film humidification-It is can reduce the total length of the unit, and is safe and reliable without water treatment.
- \* Dry steam humidification-Made of stainless steel materials, it has a nice look and corrosion resistance.
- \* Electrode humidification--It has a high humidification efficiency and multiple optional control modes.

### Comparison of humidification modes:

Humidifier description	Operating conditions of humidifier					
	Ambient temperature	Humidity	Critical velocity m/s	Water feed media	Feedwater/steam temperature °C	Feedwater/steam pressure MPa
High pressure spray humidifier	1-40	85%	0.5-3.5	Tap water or purified water or similar water	4-55	0.1-0.5
Dry steam humidifier	/	/	/	Steam	0-100	0.02-0.4
Wet film humidifier	5-100	<90%	≤2.8	Tap water or similar water	5-40	0.15-0.75
Electrode humidifier	0-40	<80%	/	Clean tap water or softened water	/	0.1-1.0

## Sound attenuator section

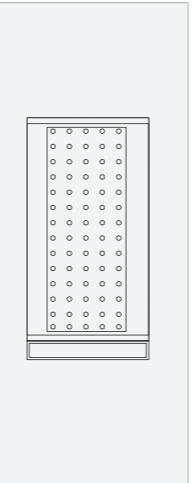

Sound attenuator can be provided in both supply and return air side. the sound attenuator section is made up of resistive silencer, with galvanized sheet as the frame and ultrafine glass fiber wool as the liner. it has good sound attenuation performance in a wide frequency range.

### Sound attenuation capacity of sound attenuator dB(A):

Sound attenuator length	Section length (mm)	600/6M	900/9M	1200/12M	1500/15M	1800/18M	2100/27M
Sound attenuation capacity	dB(A)	17	20	23	25.5	27.5	29


### Dynamic insertion loss of sound attenuator dB(A):

Octave Sound attenuator length	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz
	600mm	9	12	22	30	29	21	12
900mm	7	12	16	28	35	35	28	17
1200mm	7	15	20	34	40	40	34	21

## Diffuser section and middle section

Haier modular air handling unit also provides the diffuser section that is used for flow equalization of the fan outlet and the middle section that is used for maintenance or transition of functional sections.


## Healthy and sterilization section

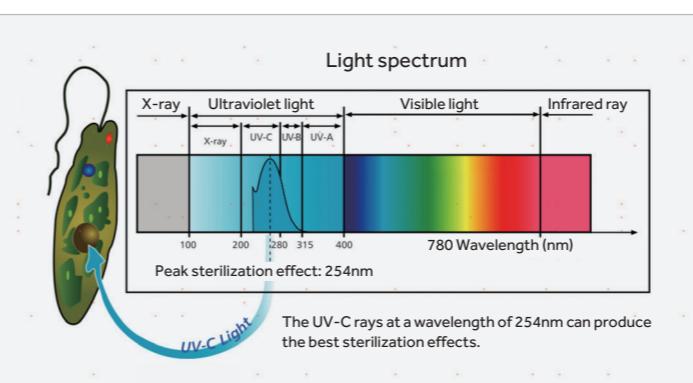

### UV sterilizer sectio

Ultraviolet sterilization: the ultraviolet rays can be divided into four bands by wavelength according to the different biological effects. UV-C, the C band of UV rays, is from 275- 200nm.

The UV rays at a wavelength of about 254nm have the strongest bactericidal ability. photonic energy can destroy the molecular structure of microbe DNA and RNA, making them subjected breakage or photochemical reaction to lose the ability to reproduce.

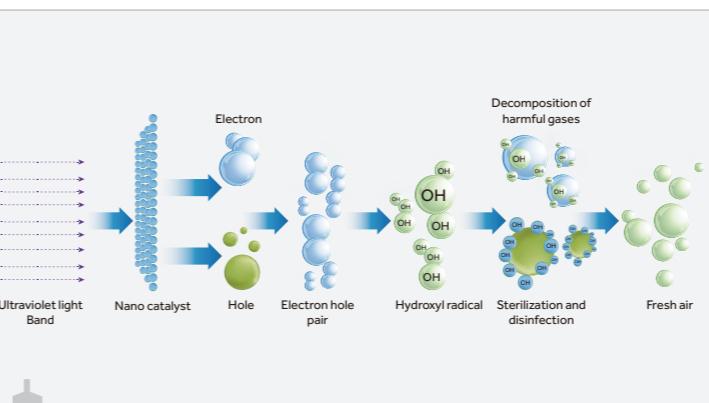

### Photocatalyst purification and sterilization section

Under the radiation of certain light at a specific wavelength, the nanometer photocatalyst can be activated to produce electron hole pairs which can have the photocatalyst interact with surrounding H<sub>2</sub>O molecules and O<sub>2</sub> molecules to form hydroxyl radicals (OH). the hydroxyl radicals can lock up all harmful components in the air layer by layer and break down their molecular structures to inhibit the growth of the bacteria and the virus activity, thus achieving the purposes of sterilization, air purification, deodorization, anti-poison, and air pollution abatement, etc.


# Functional sections

Length of functional sections (modules)

Functional sections	Mixing box section	Fresh air and exhaust air section	Secondary return air section	Preliminary filter section	Secondary filter section	Chilled water coil section	Electric heater section	Hot water heating coil section	Humidifier section	Fan section	Diffuser section	Sound attenuator section	Middle section	Air outlet section
Model														
ZK0607	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	8M	6M	6M-12M	6M	6M
ZK0608	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	9M	6M	6M-12M	6M	6M
ZK0710	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	7M	6M	6M-12M	6M	6M
ZK0712	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	8M	6M	6M-12M	6M	6M
ZK0812	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	8M	6M	6M-12M	6M	6M
ZK0813	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	8M	6M	6M-12M	6M	6M
ZK1012	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	8M	6M	6M-12M	6M	6M
ZK1013	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	8M	6M	6M-12M	6M	6M
ZK1014	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	9M	6M	6M-12M	6M	6M
ZK1016	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	10M	6M	6M-12M	6M	6M
ZK1216	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	10M	6M	6M-12M	6M	6M
ZK1218	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	11M	6M	6M-12M	6M	6M
ZK1320	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	12M	6M	6M-12M	6M	6M
ZK1416	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	11M	6M	6M-12M	6M	6M
ZK1418	6M	12M	6M	1M	5M	6M-9M	3M	5M	6M-9M	12M	6M	6M-12M	6M	6M
ZK1420	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	12M	6M	6M-12M	6M	8M
ZK1522	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	13M	6M	6M-12M	6M	8M
ZK1618	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	12M	6M	6M-12M	6M	8M
ZK1620	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	13M	6M	6M-12M	6M	8M
ZK1622	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	13M	6M	6M-12M	6M	8M
ZK1624	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	15M	6M	6M-12M	6M	8M
ZK1626	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	15M	6M	6M-12M	6M	8M
ZK1820	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	13M	6M	6M-12M	6M	8M
ZK1822	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	15M	6M	6M-12M	6M	8M
ZK1826	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	16M	6M	6M-12M	6M	8M
ZK1828	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	16M	6M	6M-12M	6M	8M
ZK2022	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	15M	6M	6M-12M	6M	8M
ZK2024	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	16M	6M	6M-12M	6M	8M
ZK2026	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	16M	6M	6M-12M	6M	8M
ZK2224	8M	16M	8M	1M	5M	6M-9M	3M	5M	6M-9M	16M	6M	6M-12M	6M	8M
ZK2226	10M	20M	10M	1M	5M	6M-9M	3M	5M	6M-9M	18M	6M	6M-12M	6M	10M
ZK2426	10M	20M	10M	1M	5M	6M-9M	3M	5M	6M-9M	18M	6M	6M-12M	6M	10M
ZK2428	10M	20M	10M	1M	5M	6M-9M	3M	5M	6M-9M	18M	6M	6M-12M	6M	10M
ZK2628	10M	20M	10M	1M	5M	6M-9M	3M	5M	6M-9M	20M	6M	6M-12M	6M	10M
ZK2630	10M	20M	10M	1M	5M	6M-9M	3M	5M	6M-9M	20M	6M	6M-12M	6M	10M
ZK2830	10M	20M	10M	1M	5M	6M-9M	3M	5M	6M-9M	20M	6M	6M-12M	6M	10M
ZK2832	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	22M	6M	6M-12M	6M	12M
ZK2834	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	22M	6M	6M-12M	6M	12M
ZK2836	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	22M	6M	6M-12M	6M	12M
ZK2838	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	25M	6M	6M-12M	6M	12M
ZK3038	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	25M	6M	6M-12M	6M	12M
ZK3040	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	25M	6M	6M-12M	6M	12M
ZK3042	12M	24M	12M	1M	5M	6M-9M	3M	5M	6M-9M	25M	6M	6M-12M	6M	12M
ZK3546	14M	28M	14M	1M	5M	10M-12M	3M	5M	6M-9M	25M	6M	6M-12M	6M	14M
ZK3749	14M	28M	14M	1M	5M	10M-12M	3M	5M	6M-9M	27M	6M	6M-12M	6M	14M
ZK3755	14M	28M	14M	1M	5M	10M-12M	3M	5M	6M-9M	27M	6M	6M-12M	6M	14M
ZK4355	14M	28M	14M	1M	5M	10M-12M	3M	5M	6M-9M	30M	6M	6M-12M	6M	14M
ZK4361	14M	28M	14M	1M	5M	10M-12M	3M	5M	6M-9M	30M	6M	6M-12M	6M	14M

Notes:  
 1. 'M' is stand for modules, 1M=100mm  
 2. Data in the table is standard functional sections length.  
 3. If any specific requirement of functional sections size, please contact Haier local agencies.


## Electronic air cleaner section

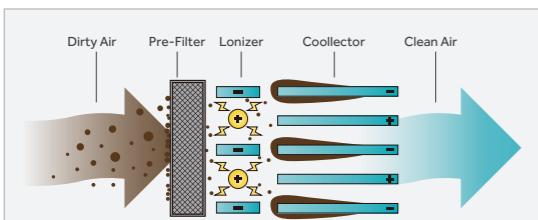

Floating dust and pollutants in the air are ionized and change the direction of movement as they pass through a high-voltage electric field, and then are captured. then, the positively charged ions move towards the cathode plate (negative plate) under the action of the electric field force. Based on the principle of positive and negative attraction, the particles will be captured and adsorbed on the integrated plate by the energies released by the high-voltage charges instantly, thus achieving the purposes of dust removal and sterilization.

**PM2.5 one-pass purification efficiency:** >90% at 2.5m/s air speed (in coordination with primary efficiency filter)  
**Microorganism one-pass purification efficiency:** >90%

## Activated carbon absorber section

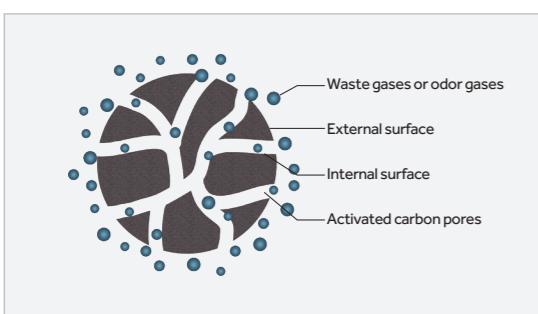

The function section is fitted with an activated carbon filter that consists of tiny carbon grain with large surface area and even smaller pores called capillaries. such capillaries have very strong adsorption capacity and relying on the large surface area of the carbon particles, they can come into full contact with impurities in the gases. the impurities in the gases will be absorbed after meeting with the capillaries, so air purification can be achieved.

Activated carbon	N4G1	N4S1	N4A1	N4F1	N4M1
Usage</					


# Functional sections

## Weight of functional sections(kg)


Model	0607	0608	0710	0712	0812	0813	1012	1013	1014	1016	1216	1218	1320	1416	1418	1420	1522	1618	1620	1622	1624	1626	1820	1822	
Functional sections																									
Mixing box section	60	65	106	110	120	132	143	145	151	162	164	216	223	220	220	236	296	237	288	300	320	336	300	320	
Fresh air and exhaust air section	110	125	197	200	218	237	262	267	270	288	326	381	387	387	384	408	490	409	485	495	540	554	495	540	
Secondary return air section	50	60	91	96	102	105	114	117	120	127	141	165	164	168	160	172	193	173	188	198	203	216	198	203	
Primary filter	48	50	83	84	94	102	113	115	120	128	141	162	166	165	162	182	214	183	210	220	242	251	220	244	
Secondary filter	48	50	83	84	94	102	113	115	120	128	141	162	188	165	180	182	214	183	210	220	242	251	220	244	
Sub-HEPA, HEPA filter	48	50	75	76	86	92	103	105	109	116	128	147	150	151	145	186	194	188	190	198	220	228	198	220	
Chilled water coil section	56	60	118	123	130	147	159	172	184	192	203	230	272	242	266	275	300	290	295	282	365	380	282	365	
	73	78	131	134	150	165	179	186	199	207	234	288	297	290	290	337	385	350	375	382	439	476	382	439	
	78	85	144	150	169	186	198	212	223	235	268	331	347	340	338	397	457	420	445	422	410	533	422	410	
	85	98	157	164	184	208	216	237	247	264	301	373	397	379	386	456	529	480	512	475	586	619	475	586	
Hot water heating coil section	53	57	95	96	108	118	130	132	138	147	184	195	201	205	108	220	264	240	258	275	289	309	275	289	
	55	65	105	108	126	136	145	154	165	171	195	234	247	245	240	266	323	285	310	342	360	388	342	360	
Electric heater section	63	65	109	112	120	126	150	142	149	158	173	206	203	207	106	213	263	218	251	280	295	301	280	295	
Fan section	95	100	160	173	195	209	220	238	251	278	306	307	452	323	430	490	599	495	572	612	643	660	612	643	
Humidifier section	53	56	91	95	102	104	123	115	119	127	141	171	180	175	178	171	185	175	183	193	204	213	193	204	
Diffuser section	56	57	94	93	106	116	129	131	137	145	183	193	199	195	196	210	210	211	210	212	212	214	211	214	
Sound attenuator section	6M	70	78	125	128	143	157	169	175	179	194	217	258	270	260	265	285	288	286	287	292	295	297	292	295
	9M	87	95	156	159	179	197	210	219	225	244	272	302	341	310	330	360	379	365	376	395	401	395	398	
	12M	125	135	171	184	200	211	222	231	217	269	298	331	369	342	355	401	439	420	435	450	488	505	450	488
Middle section	48	49	80	86	92	93	106	101	105	112	124	143	148	145	147	146	150	148	150	155	173	177	155	173	
Air outlet section	48	49	81	89	101	111	117	121	127	134	146	156	172	159	165	175	201	179	195	203	225	229	203	225	

Model	1826	1828	2022	2024	2026	2224	2226	2426	2428	2628	2630	2830	2832	2834	2836	2838	3038	3040	3042	3546	3749	3755	4355	4361
Functional sections																								
Mixing box section	358	385	336	360	394	402	413	438	469	495	572	595	630	645	670	689	795	810	850	850	940	1024	1081	1164
Fresh air and exhaust air section	490	624	554	493	635	642	654	654	767	832	905	932	979	1001	1040	1066	1210	1240	1300	1300	1425	1549	1628	1750
Secondary return air section	225	252	216	230	263	270	274	278	298	319	333	339	349	350	352	377	419	438	450	450	485	525	547	586
Primary filter	263	290	251	268	298	308	326	355	376	402	416	451	489	492	501	529	601	613	634	634	687	744	777	833
Secondary filter	263	290	251	268	298	308	326	355	376	402	416	451	489	492	501	529	601	613	634	634	687	744	777	833
Sub-HEPA, HEPA filter	240	269	228	243	274	279	302	329	342	361	378	401	445	450	468	481	539	558	577	577	625	677	707	758
Chilled water coil section	427	480	380	430	490	499	536	567	590	660	702	730	800	830	867	892	950	980	1036	1036	1169	1230	1301	1430
	432	592	476	436	599	605	668	712	765	812	878	898	981	998	1038	1076	1202	1269	1					


# Functional sections

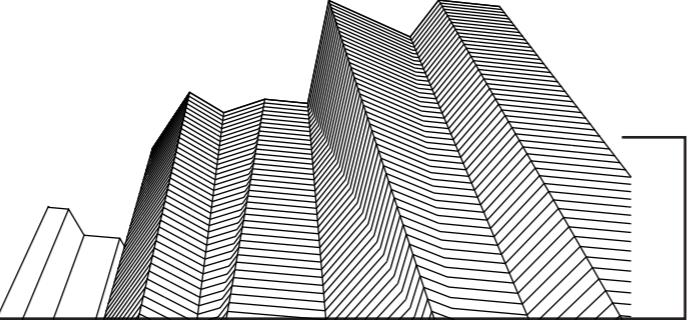

## Fan outlet direction

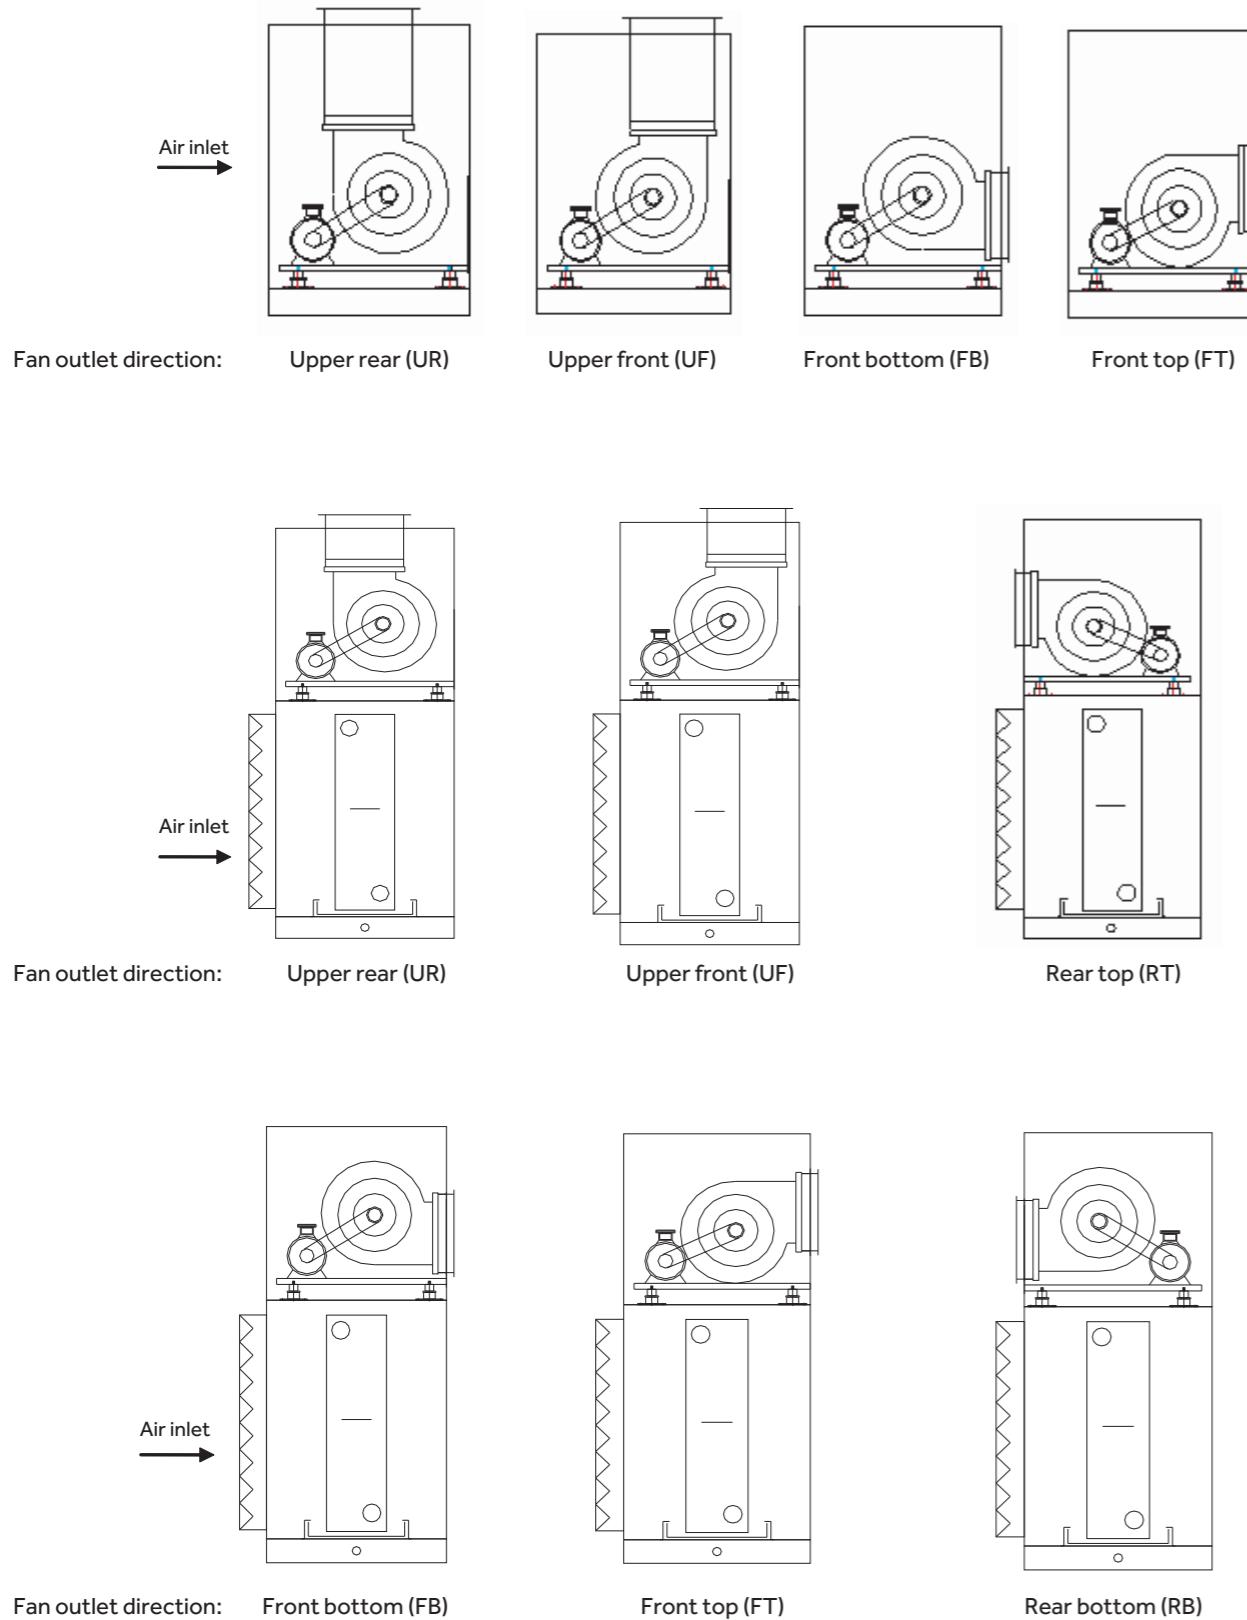

# Control system

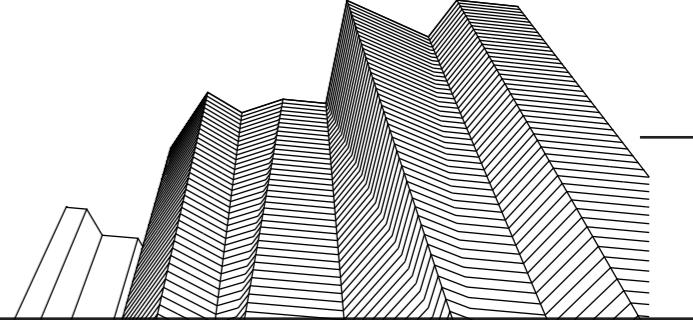


## Direct digital control system

The direct digital control (DDC) is a microprocessor-based control mode which inputs the sensor or transmitter signals directly into the microcomputer without any instrument and drives the actuators directly after calculation and processing according to the pre-programmed programs.

The CPU of the DDC runs very fast and is generally configured with a lot of input/output (I/O) ports. Therefore, it can control multiple circuits simultaneously, equivalent to multiple analog controllers. The DDC controller features small volume, fewer connections, complete functions, high reliability, etc.

Taking the constant temperature and humidity control system as an example, the system flow chart is as follows:

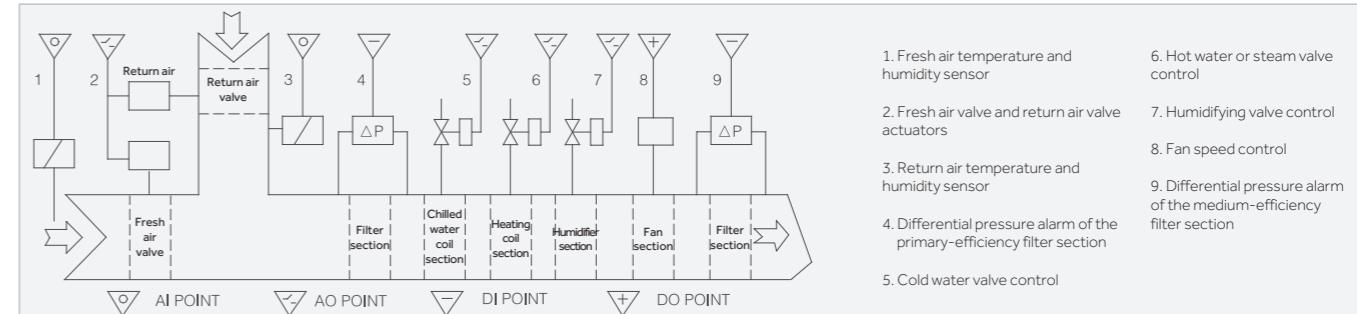

### System working principle:

The system adopts a direct digital controller as core of control system and regulates the opening speed of the cold water valve, hot water (steam) valve, and humidifying valve continuously with the proportional integral (PI) control algorithm by collecting the temperature and humidity data of the return air and fresh air and comparing them with the settings. So that the temperature and humidity keep approaching the setting value indefinitely.

### System features:

- ※ LCD display of the unit operation data, such as the fresh air and the return air temperature and humidity, etc.
- ※ Alarm and interlocking of filter section blockage, fan motor stalling, and key failures (such as fires).
- ※ Constant temperature and humidity PI control.
- ※ Control the start and stop of the unit remotely from inside the room.
- ※ Start-up and shutdown sequence and interlocking (preventing steam valve action during the shutdown from causing the valve body burst).
- ※ Allows advanced users to program on site.
- ※ With a communication module, it can be networked to form a distributed control system without any need of replacing the DDC.
- ※ The system is modularized and can be adjusted according to the user requirements.

## Total distributed system


Compared to the conventional computer control methods, the total distributed system (TDS) aims to decentralize its control functions and centralize its management functions as far as possible. It consists of three basic levels, including central station, sub-stations, and on-site sensors and actuators. The central station and the sub-stations are connected by data communication channels between each other.

The sub-stations are just the microprocessor-based DDC controllers as described above. They are distributed to the sites of each controlled device of the whole system and are directly connected to the on-site sensors and actuators to realize the detection and control of field devices. The central station conducts centralized monitoring and management functions, such as centralized monitoring, centralized start-stop control, centralized parameter modification, alarm, and record, etc. The centralized management functions of the total distributed system are completed by the central station, while the control and regulation functions are realized by the sub-stations, DDC controllers.

The composition of the total distributed system is as shown in the figure:  
(attached figure)

The total distributed system is developed based on DDC controllers. Compared with the DDC control system, its features mainly manifest in the central station functions and the network functions. It realizes centralized monitoring and management via the central station and the bus network. It can be seen that the total distributed system will be the future development direction, especially in the air conditioning control of the large and medium-sized clean rooms.


Note: The automatic control device of the unit is optional. If you need it, please contact Haier local agencies.

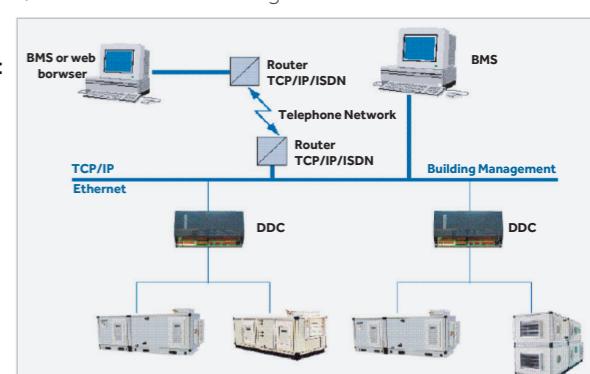




# REFERENCE PROJECTS





# Reference Projects

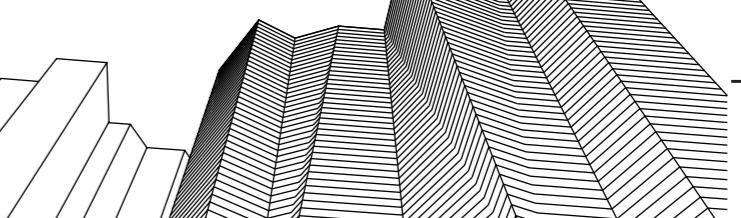

**China**

Project Name: **Jiaodong Airport**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**



**China**

Project Name: **Shenzhen Metro Line 14**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**



**China**

Project Name: **Wulumuqi New Railway Station**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**




**Taiwan, China**

Project Name: **Far Eastern Group (Building)**


Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **2200RT**





# Reference Projects

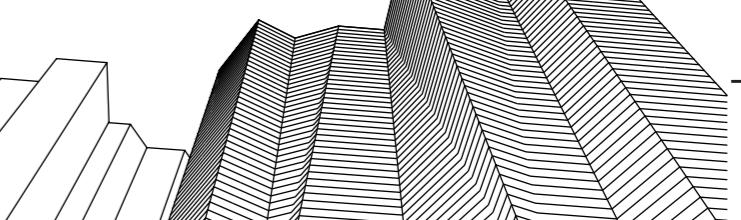

## Taiwan, China

Project Name: **The Grand Hotel, Taipei**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **200RT**



## India

Project Name: **Parag Milk Foods Pvt. Ltd.**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **150kW**



## Taiwan, China

Project Name: **CTCI Building**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **1195RT**




## Malaysia

Project Name: **Tabung Haji**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **1350RT**





# Reference Projects



## Malaysia

Project Name: **Puchong Financial Corporate Center (PFCC)**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **600RT**



## Malaysia

Project Name: **Putrajaya Hospital, Kuala Lumpur**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**


Capacity: **1000RT**



Project Name: **International School of Kuala Lumpur (ISKL), Green Platinum Building**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **1800RT**

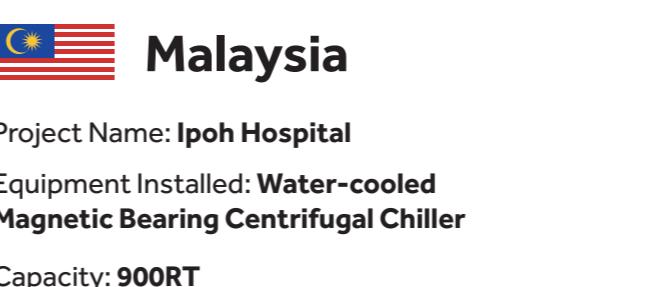


## Malaysia

Project Name: **Ipoh Hospital**


Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **900RT**





# Reference Projects

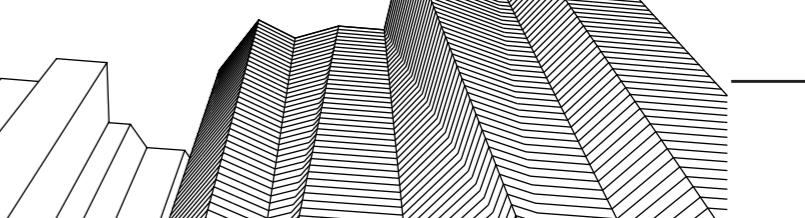

## Pakistan

Project Name: **Dominion Mall & Apartments**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **5000RT**




## Thailand

Project Name: **Banyan Tree Bangkok**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller\*2**

Capacity: **450RT**

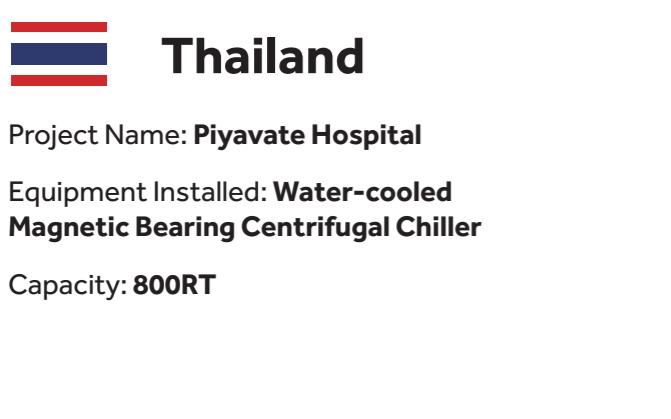


## Thailand

Project Name: **Piyavate Hospital**


Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **800RT**





# Reference Projects

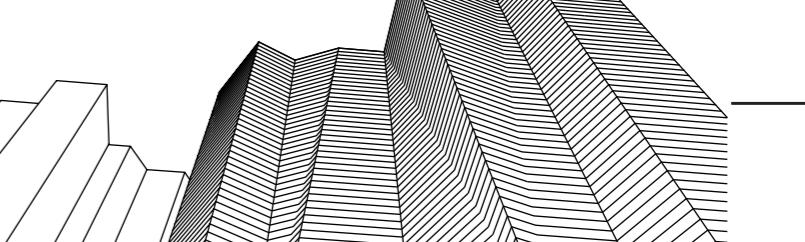

## Thailand

Project Name: **Suvarnabhumi International Airport**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller\*9 sets**

Capacity: **2850RT**




## Thailand

Project Name: **Apex Circuit Co.,Ltd.**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller\*6 sets**

Capacity: **1850RT**

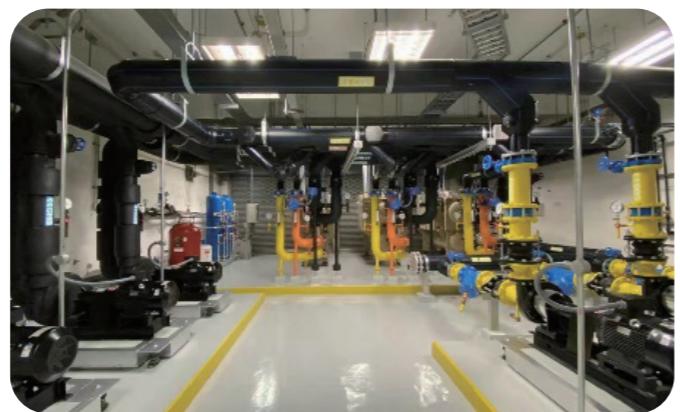

## Thailand

Project Name: **Shinawatra Tower III**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **300RT**




## Thailand

Project Name: **Osotspa Co.,Ltd.**

Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**

Capacity: **500RT**



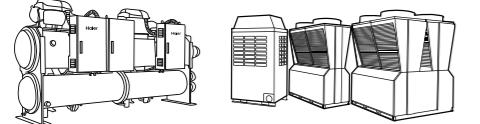

# Reference Projects



## Thailand

Project Name: **Transitions Factory**  
Equipment Installed: **Water-cooled Magnetic Bearing Centrifugal Chiller**  
Capacity: **400RT**



## Commonwealth of Independent States(CIS)

Project Name: **Faberlic Factory, Nikolskay 4**  
Equipment Installed: **Modular Chiller**  
Capacity: **200kW**



## Albania

Project Name: **Justice Ministry, Tirana**  
Equipment Installed: **Modular Chiller\*8 sets**  
Capacity: **520kW**




## New Zealand

Project Name: **Distinction Hotel**  
Equipment Installed: **Modular Chiller**  
Capacity: **130kW**





# Reference Projects

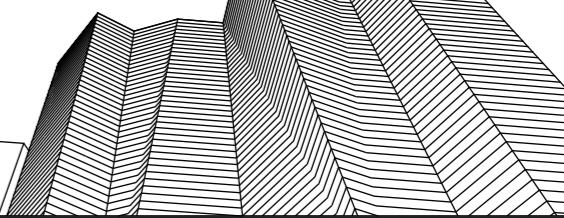

## Pakistan

Project Name: **MG Motors Factory**  
 Equipment Installed: **Inverter Modular Chiller**  
 Capacity: **102RT**




## Spain

Project Name: **Madrid Hospital La Paz**  
 Equipment Installed: **Modular Chiller +AHU**  
 Capacity: **260kW**



## Poland


Project Name: **PCBC (Polskie Centrum BadaniCertyfikacji), Warsaw**  
 Equipment Installed: **Modular Chiller**  
 Capacity: **130kW**

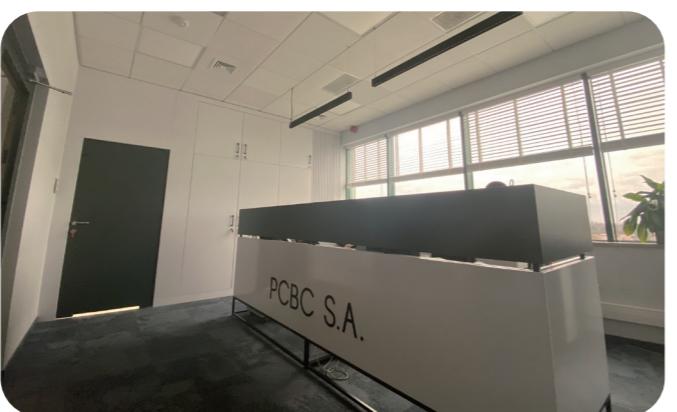


## Spain

Project Name: **University of Jaén**  
 Equipment Installed: **Modular Chiller\*8 sets**  
 Capacity: **260kW**





# Reference Projects

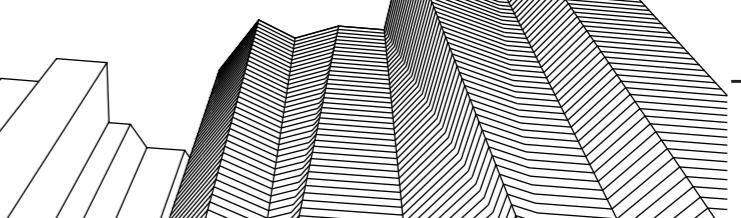

## Spain

Project Name: Consejo Económico y Social de Andalucía

Equipment Installed: Modular Chiller

Capacity: 600RT



## Australia

Project Name: Marland Mushroom

Equipment Installed: Air-cooled Magnetic Bearing Centrifugal Chiller

Capacity: 1000RT



## Spain

Project Name: Holiday Inn Las Tablas

Equipment Installed: Modular Chiller

Capacity: 390kW




## Thailand

Project Name: Stamford International University

Equipment Installed: Air-cooled Magnetic Bearing Centrifugal Chiller

Capacity: 100RT





# Reference Projects



## Algeria

Project Name: **Les Oliviers Birkhadam Mental Hygiene Center**

Equipment Installed: **Magnetic Bearing Centrifugal Chiller**

Capacity: **365RT**



## Dubai

Project Name: **China Pavilion at the Expo Dubai**

Equipment Installed: **Magnetic Bearing Centrifugal Chiller**

